ILS or LOC RWY 5

NEW BEDFORD RGNL (EWB)

LOC/DME I-EWB	APP CRS	Rwy Idg	4997
109.7	054°	TDZE	72
Chan 34		Apt Elev	80

Auto coupled approach NA below 470. ADF required.

MALSR

MISSED APPROACH: Climb to 700, then climbing left turn to 1700 direct NEFOR LOM and hold.

ATIS	PROVIDENCE APP CON*	NEW BEDFORD TOWER*	GND CON	UNICOM
126.85	128.7 269.525	118.1 (CTAF) L 239.0	121.9	122.95

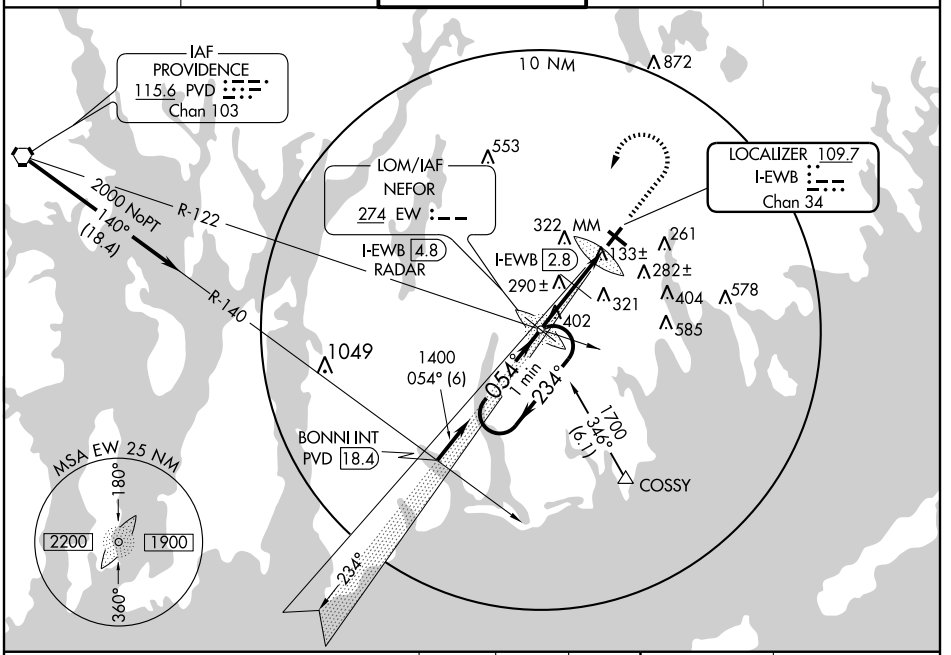

NE-1, 22 OCT 2009 to 19 NOV 2009

NE-1, 22 OCT 2009 to 19 NOV 2009

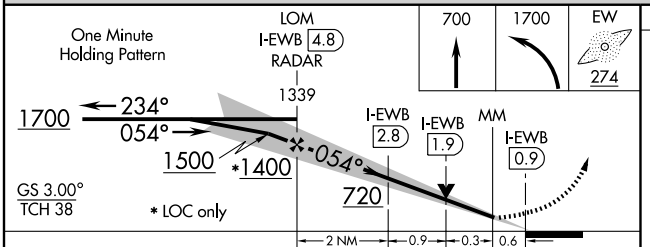

CATEGORY	A	B	C	D
S-ILS 5	272/24 200 (200-½)			
S-LOC 5	720/24 648 (700-½)		720/60 648 (700-1¼)	720-1½ 648 (700-1½)
CIRCLING	720-1 640 (700-1)		720-1¾ 640 (700-1¾)	720-2 640 (700-2)
DME MINIMUMS				
S-LOC 5	420/24 348 (400-½)			420/40 348 (400-¾)
CIRCLING	620-1 540 (600-1)		640-1½ 560 (600-1½)	640-2 560 (600-2)

ELEV 80

MIRL Rwy 14-32 L
HIRL Rwy 5-23 L
REIL Rwy 32 L

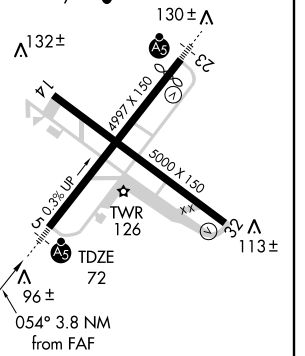

FAF to MAP 3.8 NM

Knots	60	90	120	150	180
Min:Sec	3:48	2:32	1:54	1:31	1:16