LOC I-MBS	APP CRS	Rwy Idg	8002
108.7	050°	TDZE	666
		Apt Elev	668

ILS or LOC RWY 5

SAGINAW/MBS INTL (MBS)

CAT D S-LOC visibility increased to RVR 5000 for inoperative MM. When control tower closed, activate MALSR Rwy 23 and SSALR Rwy 5 - CTAF. ASR *RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2400 then left turn via MBS R-016 to SEEKS Int/14 DME and hold.

ATIS	SAGINAW APP CON *		SAGINAW TOWER *	GND CON	CLNC DEL	UNICOM
125.925	050°-229° 120.95	235.625	120.1 (CTAF) L 257.7	121.7	121.85	122.95
	230°-049° 126.45	235.625				

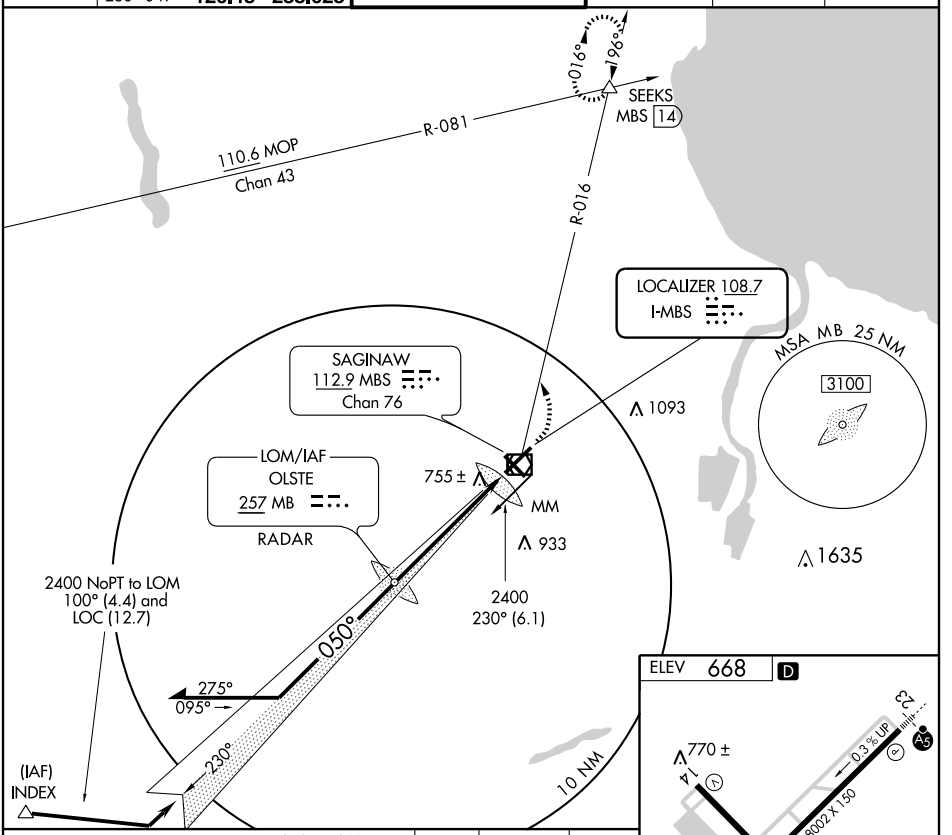

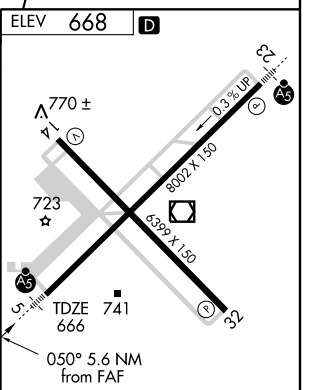

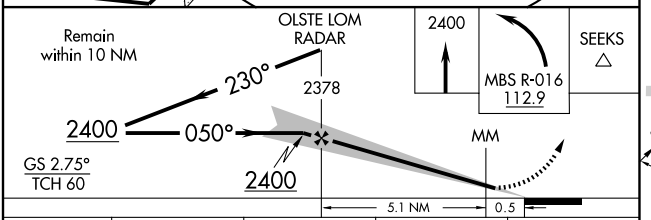

CATEGORY	A	B	C	D
S-ILS 5	*866/24 200 (200-½)			
S-LOC 5	1060/24 394 (400-½)			1060/40 394 (400-¾)
CIRCLING	1100-1 432 (500-1)	1120-1 452 (500-1)	1120-1½ 452 (500-1½)	1220-2 552 (600-2)

REIL Rwys 14 and 32
HIRL Rwys 5-23 and 14-32

FAF to MAP 5.6 NM

Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52

EC-1, 22 OCT 2009 to 19 NOV 2009
EC-1, 22 OCT 2009 to 19 NOV 2009