WAAS CH 66014 W31A	APP CRS 307°	Rwy Idg 6502 TDZE 1498 Apt Elev 1500

RNAV (GPS) RWY 31
JAMESTOWN RGNL (JMS)

For inoperative MALSR, increase LNAV Cat D visibility to 1¼ mile. Baro-VNAV NA when using Devils Lake altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Devils Lake altimeter setting and increase all DA 172 feet, all MDA 180 feet, increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats visibility ½ mile, LNAV Cat C visibility ½ mile, Cat D visibility ¼ mile, Circling Cats C and D visibility ¼ mile. VDP NA with Devils Lake altimeter setting.
For inoperative MALSR when using Devils Lake altimeter setting increase LPV all Cats visibility to 1¼ mile. Inoperative table does not apply to LNAV Cats C and D when using Devils Lake altimeter setting.

MALSR

MISSED APPROACH: Climb to 3600 direct EVADE and hold.

ASOS	MINNEAPOLIS CENTER	UNICOM
118.425	124.2 270.3	123.0 (CTAF) L

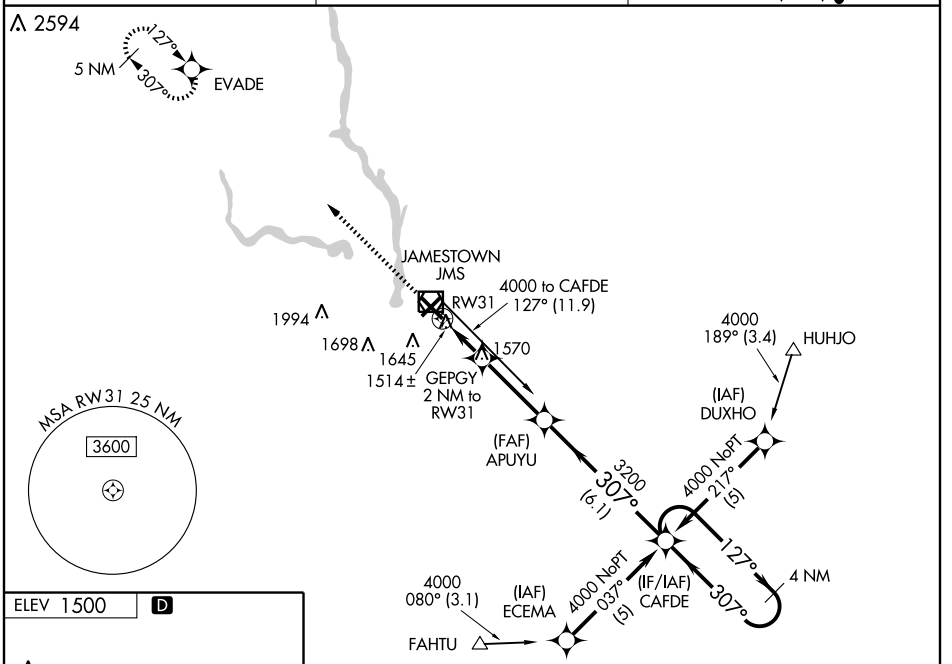

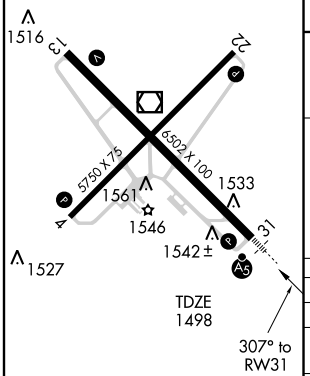

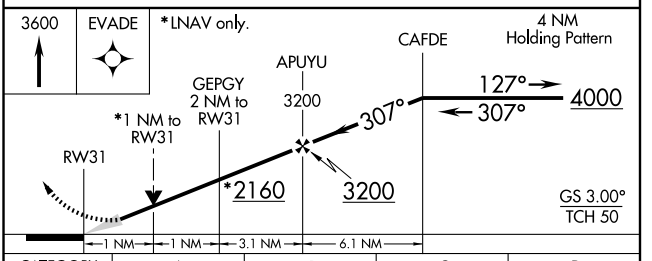

CATEGORY	A	B	C	D
LPV DA	1698-½ 200 (200-½)			
LNAV/VNAV DA	1836-¾ 338 (400-¾)			
LNAV MDA	1880-½ 382 (400-½)			1880-1 382 (400-1)
CIRCLING	1960-1 460 (500-1)		1960-1½ 460 (500-1½)	2060-2 560 (600-2)

NC-1, 22 OCT 2009 to 19 NOV 2009
NC-1, 22 OCT 2009 to 19 NOV 2009