


# RNAV (GPS) RWY 35

PLATTSBURGH INTL (PBG)

WAAS CH <b>78003</b> W35A	APP CRS <b>353°</b>	Rwy Idg <b>11758</b> TDZE <b>177</b> Apt Elev <b>234</b>
---------------------------------	------------------------	--



<p><b>T</b> When local altimeter setting not received, use Burlington Intl altimeter setting and increase LPV DA to 481, LNAV/VNAV DA to 591, and all MDAs 60 feet. VDP NA when using Burlington Intl altimeter setting. For inoperative MALSR, increase LPV all Cats and LNAV/VNAV and LNAV Cat E visibilities ½ mile. Baro-VNAV NA. DME/DME RNP-0.3 NA.</p>	<p>MALSR</p>	<p>MISSED APPROACH: Climb to 3500 direct OTGOE and hold.</p>
---	--------------	--

ASOS <b>132.225</b>	BURLINGTON APP CON ★ <b>121.1 278.8</b>	CLNC DEL <b>121.85</b>	UNICOM <b>122.7</b> (CTAF) <b>1</b>
------------------------	--	---------------------------	--

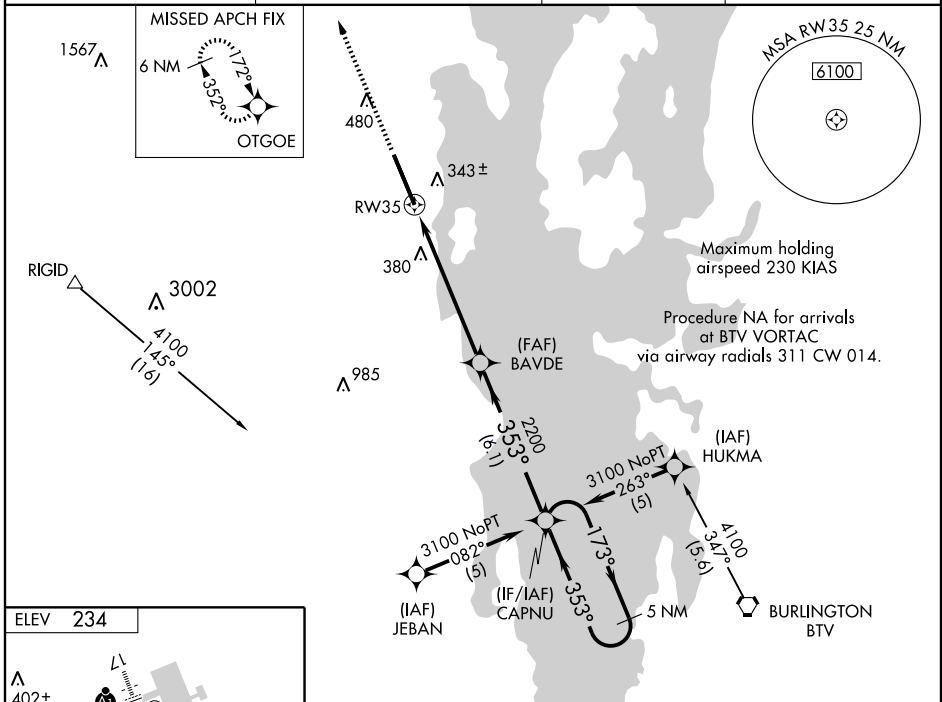

NE-2, 22 OCT 2009 to 19 NOV 2009

NE-2, 22 OCT 2009 to 19 NOV 2009

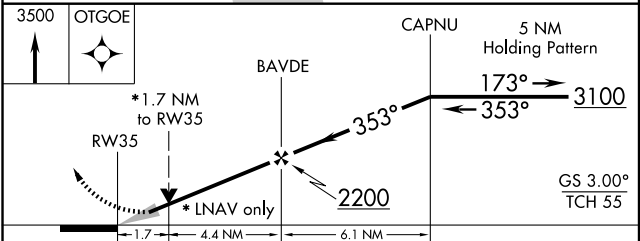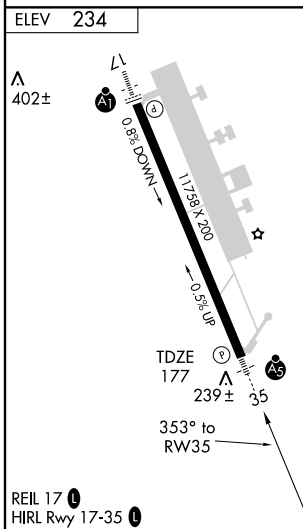

CATEGORY	A	B	C	D	E
LPV DA	427-½ 250 (200-½)				
LNAV/VNAV DA	537-¾ 360 (400-¾)				
LNAV MDA	700-½ 523 (500-½)	700-1 523 (500-1)		700-1¼ 523 (500-1¼)	
CIRCLING	700-1 466 (500-1)	720-1 486 (500-1)	720-1½ 486 (500-1½)	800-2 566 (600-2)	980-2¾ 746 (800-2¾)