

|                          |                      |  |
|--------------------------|----------------------|--|
| TACAN LRF Chan <b>29</b> | APCH CRS <b>257°</b> | Rwy Idg <b>12,000</b><br>TDZE <b>299</b><br>Arpt Elev <b>311</b> |
|--------------------------|----------------------|--|

AL-738 [USAF]

LITTLE ROCK AFB (KLRF)


▼ \* When ALS inop, increase CAT AB RVR to 50 and vis to 1 mile, CAT C RVR to 60 and vis to 1½ miles, CAT DE vis to 1½ miles.



MISSED APPROACH: Climb to 1300 then turn right climbing to 3000, intercept LRF TACAN R-340 to 13 DME (HERCK) and hold.

|                                |   |   |                               |                          |
|--------------------------------|---|---|-------------------------------|--------------------------|
| ATIS ★<br><b>119.175 251.1</b> | LITTLE ROCK APP CON<br><b>119.5 306.2</b> | LITTLE ROCK TOWER<br><b>120.6 269.075</b> | GND CON<br><b>132.8 275.8</b> | CLNC DEL<br><b>253.5</b> |
|--------------------------------|---|---|-------------------------------|--------------------------|



## RADAR REQUIRED

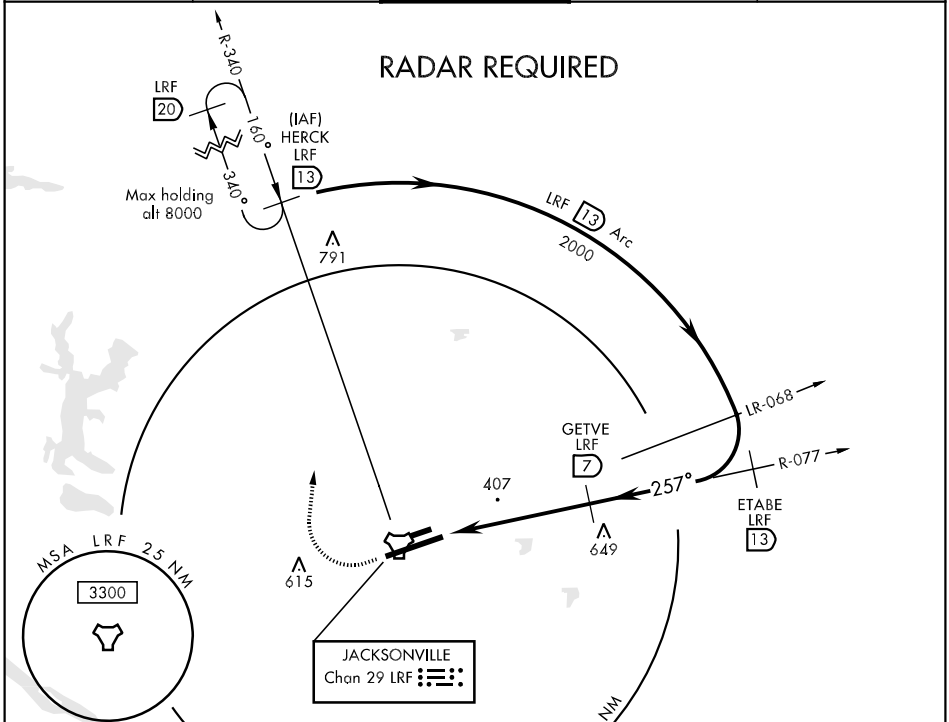

SC-1, 22 OCT 2009 to 19 NOV 2009

SC-1, 22 OCT 2009 to 19 NOV 2009

EMERG SAFE ALT 100 NM 4100

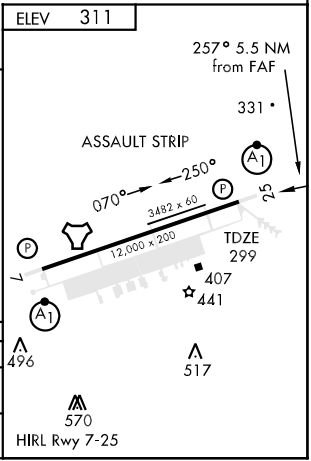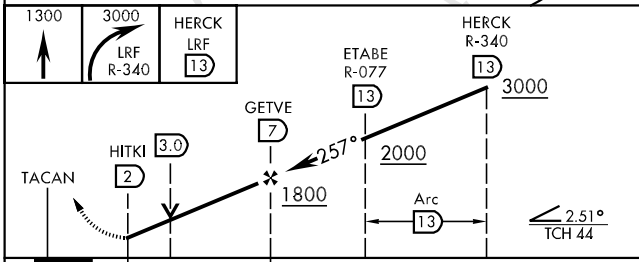

| CATEGORY | A                  | B                 | C                   | D                  | E                   |
|----------|--------------------|-------------------|---------------------|--------------------|---------------------|
| S-25 *   | 740/24 441 (500-½) |                   | 740/40 441 (500-¾)  | 740/50 441 (500-1) |                     |
| CIRCLING | 840-1 529 (600-1)  | 880-1 569 (600-1) | 880-1½ 569 (600-1½) | 880-2 569 (600-2)  | 940-2¼ 629 (700-2¼) |