


RNAV (GPS) Z RWY 9L

FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

WAAS CH 48902 W09A	APP CRS 093°	Rwy Idg 8423 TDZE 7 Apt Elev 9
--	------------------------	---




▼ For inoperative MALSRS, increase LPV all Cats. visibility to RVR 5000, LNAV visibility Cats. A and B to RVR 5000.
▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (119°F).
W DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MALSRS
 MISSED APPROACH: Climb to 4000 direct ADOTE and via 086° track to MARTS and hold, continue climb-in-hold to 4000.

ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4	CLNC DEL 128.4
----------------------	---------------------------------------	---	-------------------------	--------------------------

SE-3, 22 OCT 2009 to 19 NOV 2009

SE-3, 22 OCT 2009 to 19 NOV 2009

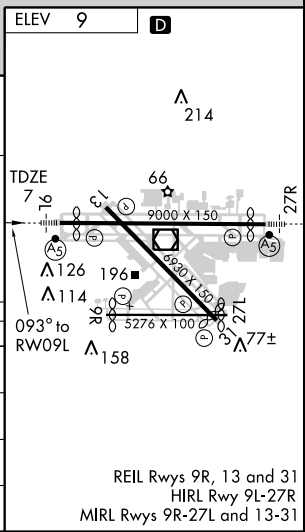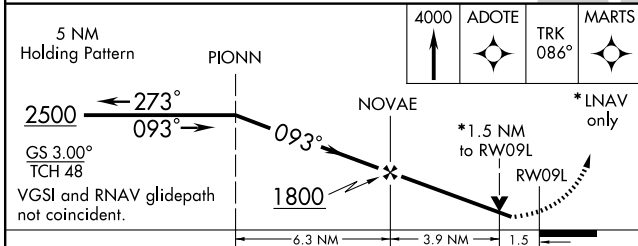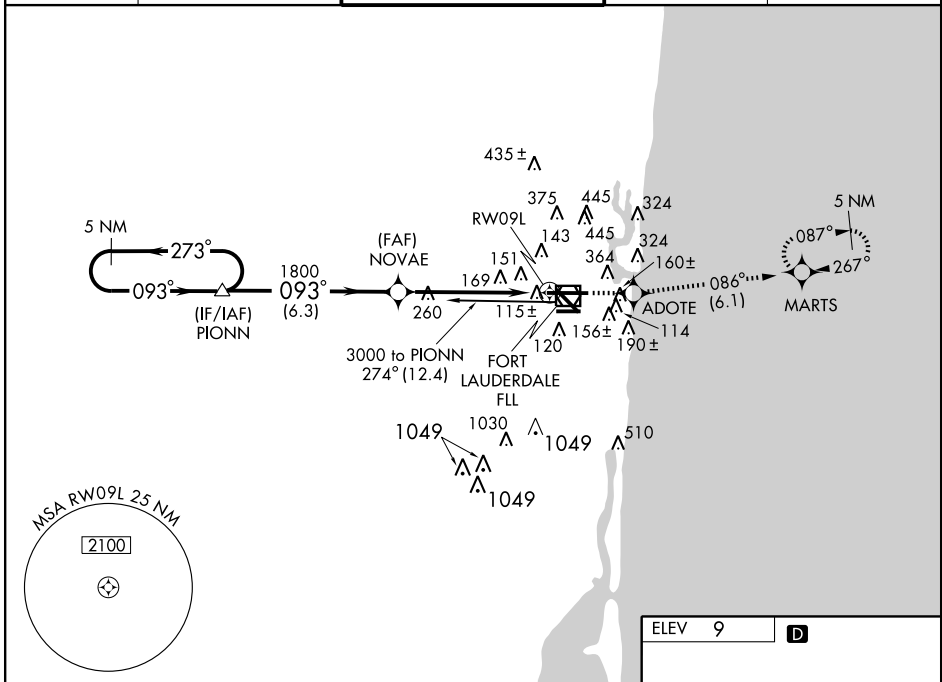

CATEGORY	A	B	C	D
LPV DA		307/40	300 (300-¾)	
LNAV/VNAV DA		484/60	477 (500-1¼)	
LNAV MDA	560/40	553 (600-¾)	560/50 553 (600-1)	560/60 553 (600-1¼)
CIRCLING	680-1¾	671 (700-1¾)	680-2 671 (700-2)	700-2¼ 691 (700-2¼)