ILS or LOC RWY 30

GARY/ CHICAGO INTL (GYY)

LOC/DME I-GYY	APP CRS	Rwy Idg	7003
108.75	306°	TDZE	591
Chan 24 (Y)		Apt Elev	591

When local altimeter setting not received, use Chicago Midway Intl altimeter setting and increase DA to 838 feet, increase all MDAs 60 feet, S-LOC 30 Cat C visibility to RVR 5000 and Cat D visibility to RVR 6000, Circling Cat C visibility to 1¾ mile.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct CGT VORTAC and hold.

ATIS	CHICAGO APP CON	GARY TOWER ★	GND CON
120.625	133.1 285.6	125.6 (CTAF) L	121.9

ADF, DME or RADAR REQUIRED

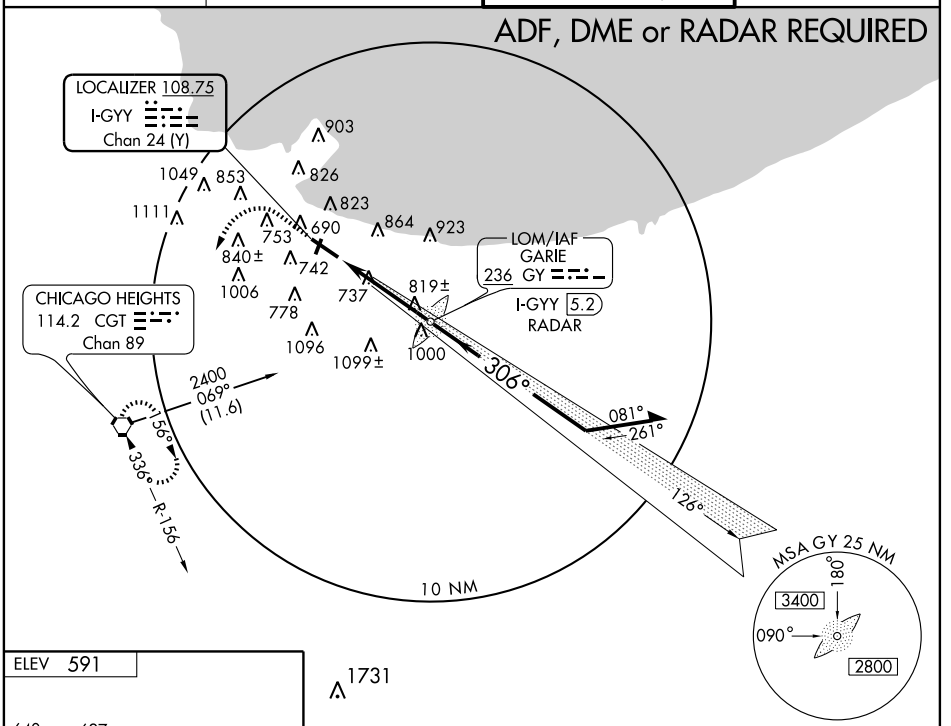

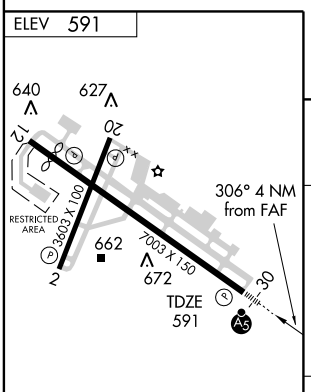

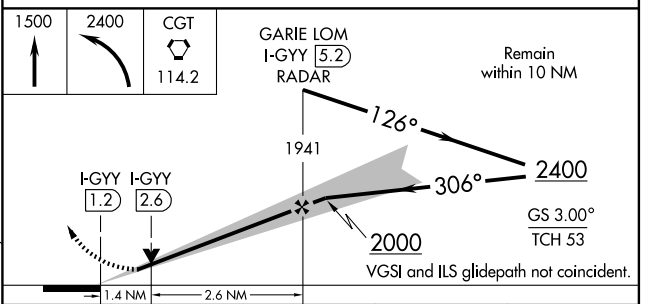

REIL Rwys 2, 12 and 20 L
HIRL Rwy 12-30 L
MIRL Rwy 2-20 L

FAF to MAP 4 NM

Knots	60	90	120	150	180
Min:Sec	4:00	2:40	2:00	1:36	1:20

CATEGORY	A	B	C	D
S-ILS 30	791/24 200 (200-½)			
S-LOC 30	1080/24 489 (500-½)		1080/40 489 (500-¾)	1080/50 489 (500-1)
CIRCLING	1140-1 549 (600-1)		1180-1½ 589 (600-1½)	1180-2 589 (600-2)

EC-2, 22 OCT 2009 to 19 NOV 2009
EC-2, 22 OCT 2009 to 19 NOV 2009