APP CRS		
042°	Rwy Idg	6398
	TDZE	10
	Apt Elev	13

RNAV (GPS) RWY 4L
HONOLULU INTL (HNL) (PHNL)

T
A NA

GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA. Cats. A, B, C circling not authorized northwest of airport between Rwys 8L-26R and 4L-22R. Cats. D, E circling not authorized north of Rwy 4L-22R.

MISSED APPROACH: Climb to 500 then climbing right turn to 3000 direct to ALANA WP and hold.

ATIS	HCF APPROACH	HONOLULU TOWER	GND CON	CLNC DEL	RAMP CONTROL
127.9 251.15	118.3 269.0	118.1 257.8	121.9 348.6	121.4 281.4	121.8

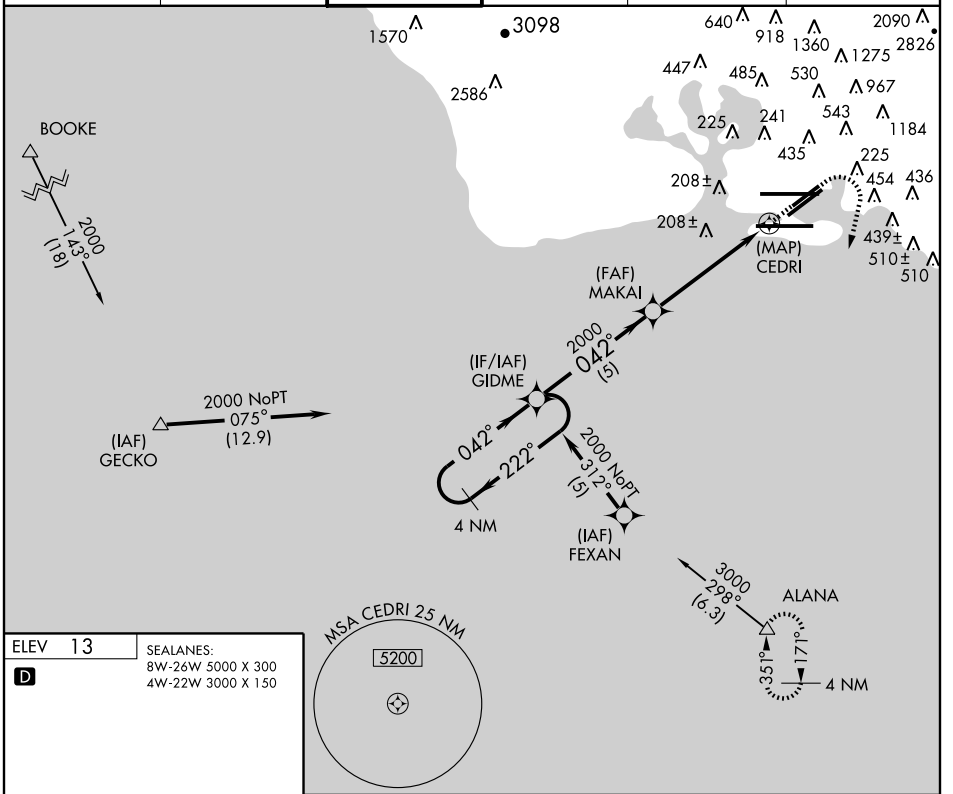

ELEV 13

D

SEALANES:
8W-26W 5000 X 300
4W-22W 3000 X 150



MIRL Rwy 4L-22R
REIL Rwys 4L, 8R, 22L, 22R and 26R
HIRL Rwys 4R-22L, 8L-26R and 8R-26L

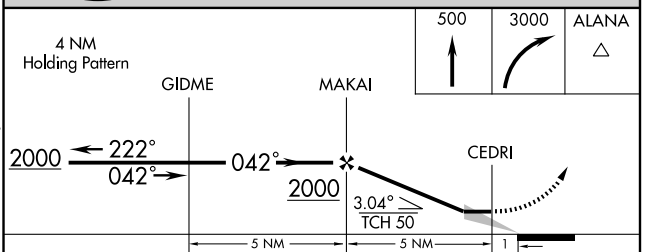

CATEGORY	A	B	C	D	E
LNAV MDA	460-1¼ 450 (500-1¼)			460-1½ 450 (500-1½)	
CIRCLING	620-1¼ 607 (700-1¼)		620-1¾ 607 (700-1¾)	820-2½ 807 (900-2½)	1500-3 1487 (1500-3)

PAC, 22 OCT 2009 to 17 DEC 2009
PAC, 22 OCT 2009 to 17 DEC 2009