| VOR RAL 112.4 | APP CRS 079° | Rwy Idg 5401<br>TDZE 795<br>Apt Elev 819 |
|---|---|---|

# VOR RWY 9
## RIVERSIDE MUNI (RAL)

When VGSI inoperative, circling Rwy 34 NA at night.
When local altimeter setting not received, use Chino altimeter setting and increase all MDAs 60 feet.

MALSR

MISSED APPROACH: Climb to 2700 then climbing right turn to 4500 direct PDZ VORTAC and hold, continue climb-in-hold to 4500.

| ATIS | SOCAL APP CON | RIVERSIDE TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 128.8 | 135.4 377.125 | 121.0 (CTAF) L 257.8 | 121.7 | 122.95 |

Procedure NA for arrivals at PDZ VORTAC via V442 southwest bound.







| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-9 | 2020-¾<br>1225 (1300-¾) | 2020-1<br>1225 (1300-1) | 2020-2½<br>1225 (1300-2½) | NA |
| CIRCLING | 2020-1¼<br>1201 (1300-1¼) | 2020-1½<br>1201 (1300-1½) | 2020-3<br>1201 (1300-3) | NA |
| UYEGO FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED) | | | | |
| S-9 | 1740-¾ 945 (1000-¾) | | 1740-2¼<br>945 (1000-2¼) | NA |
| CIRCLING | 1740-1¼ 921 (1000-1¼) | | 1740-2¾<br>921 (1000-2¾) | NA |

REIL Rwy 27
MIRL Rwys 9-27 and 16-34 L

| FAF to MAP 6.9 NM | | | | | |
|---|---|---|---|---|---|
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 6:54 | 4:36 | 3:27 | 2:46 | 2:18 |

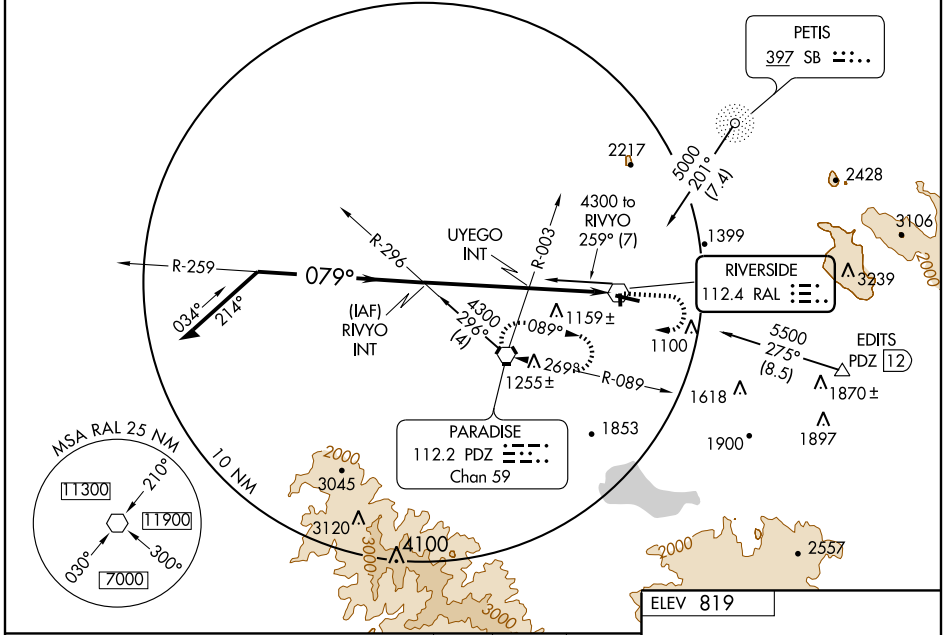

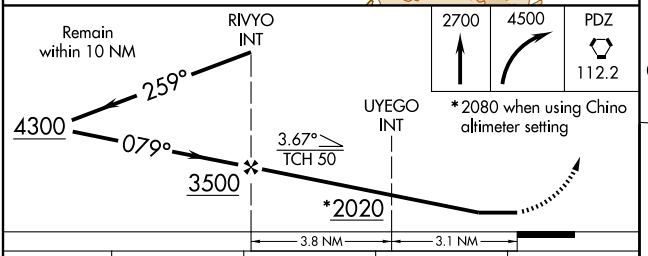SW-3, 22 OCT 2009 to 19 NOV 2009
SW-3, 22 OCT 2009 to 19 NOV 2009