WAAS	APP CRS	Rwy Idg	7398
CH 90215	035°	TDZE	3652
W03A		Apt Elev	3661

RNAV (GPS) RWY 3

HOBBS/ LEA COUNTY RGNL (HOB)

T For uncompenstaed Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 40°C (104°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Carlsbad altimeter setting and increase all DA 183 feet and all MDA 200 feet, increase LPV all Cats ¼ mile, LNAV/VNAV all Cats visibility ¾ mile, LNAV Cat C and Circling Cats C/D visibility ½ mile and LNAV Cat D visibility ¼ mile. Baro-VNAV and VDP NA with Carlsbad altimeter setting. For inoperative MALSR, when using Carlsbad altimeter setting, increase LPV all Cats visibility to 1¼ . For inoperative MALSR increase LNAV Cat D visibility to 1¼ .

MALSR

MISSED APPROACH: Climb to 6000 direct ROBRY and via track 305° to ANIHI and left turn via track 203° to DYETT and hold.

ATIS	FORT WORTH CENTER	HOBBS TOWER ★	GND CON	UNICOM
119.75	133.1 298.95	120.65 (CTAF) L 317.4	121.9	122.95

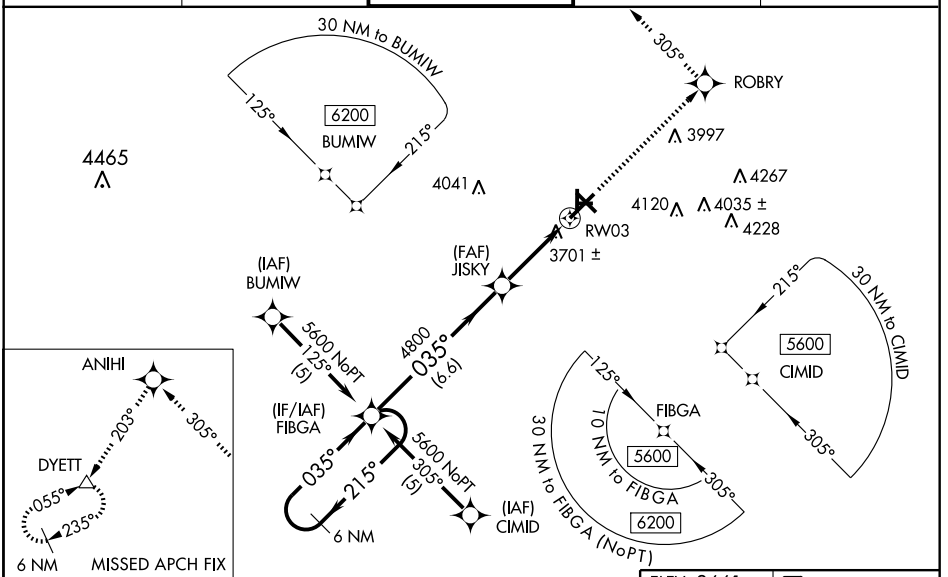

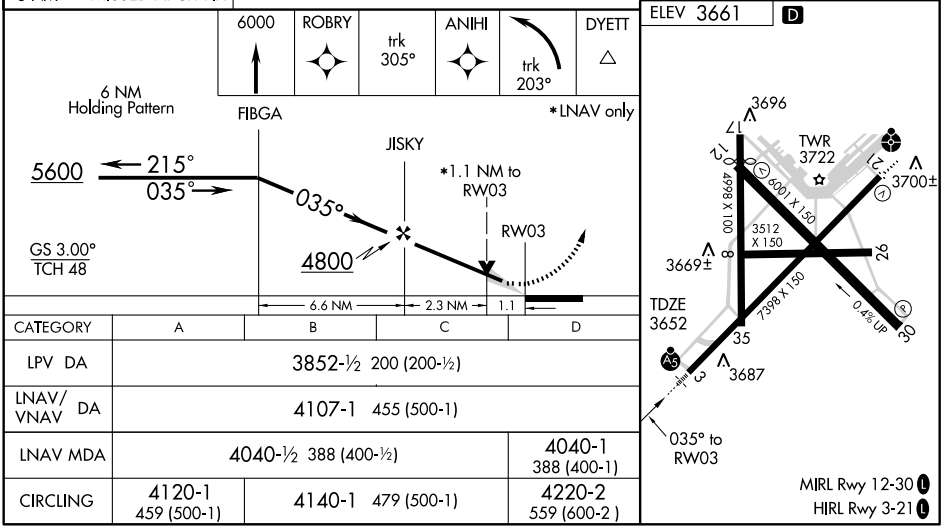

CATEGORY	A	B	C	D
LPV DA	3852-½ 200 (200-½)			
LNAV/ VNAV DA	4107-1 455 (500-1)			
LNAV MDA	4040-½ 388 (400-½)			4040-1 388 (400-1)
CIRCLING	4120-1 459 (500-1)	4140-1 479 (500-1)		4220-2 559 (600-2)

SW-1, 22 OCT 2009 to 19 NOV 2009
SW-1, 22 OCT 2009 to 19 NOV 2009