WAAS CH 53510 W04A	APP CRS 038°	Rwy Idg 7098 / TDZE 760 / Apt Elev 769

RNAV (GPS) RWY 4

QUINCY RGNL-BALDWIN FIELD (UIN)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 47° C (116° F). DME/DME RNP-0.3 NA. For inoperative MALSR increase LNAV Cat. D visibility to 1¼ miles. When local altimeter setting not received, use Pittsfield altimeter setting and increase all DA 70 feet and all MDA 80 feet. Increase LNAV/VNAV visibility all Cats. ¼ mile and LNAV Cat. C ¼ mile. For inoperative MALSR when using Pittsfield altimeter setting, increase LPV visibility all Cats. to 1 mile. VDP and Baro-VNAV NA when using Pittsfield altimeter setting.

MALSR

MISSED APPROACH: Climb to 2400 direct FANUT and hold

ASOS	KANSAS CITY CENTER	UNICOM
121.425	135.525 319.9	123.0 (CTAF) L

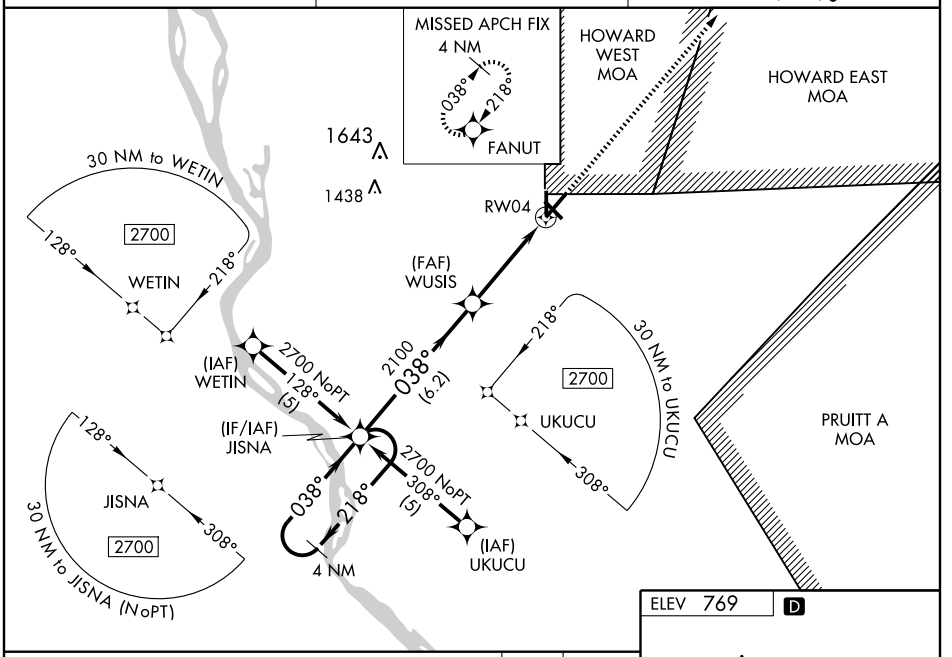

EC-3, 22 OCT 2009 to 19 NOV 2009

EC-3, 22 OCT 2009 to 19 NOV 2009

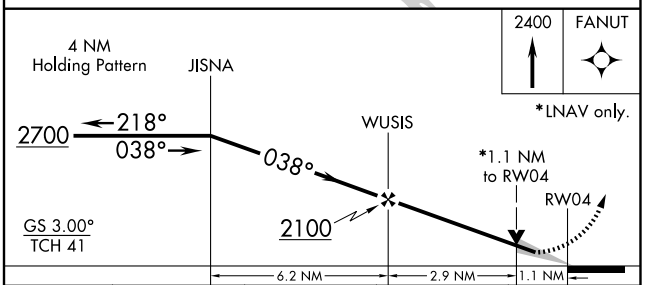

CATEGORY	A	B	C	D
LPV DA	960-½ 200 (200-½)			
LNAV/ VNAV DA	1139-¾ 379 (400-¾)			
LNAV MDA	1160-½ 400 (400-½)			1160-1 400 (400-1)
CIRCLING	1180-1 411 (500-1)	1220-1 451 (500-1)	1220-1½ 451 (500-1½)	1320-2 551 (600-2)

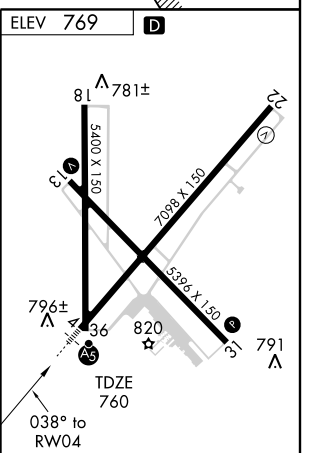

REIL Rwys 18 and 22
HIRL Rwy 4-22 L
MIRL Rwys 13-31 and 18-36 L