RNAV (GPS) RWY 36

MALDEN RGNL (MAW)

WAAS	APP CRS	Rwy Idg	5011
CH 93815	002°	TDZE	293
W36A		Apt Elev	294

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Poplar Bluff altimeter setting and increase all DA 50 feet, all MDA 60 feet and LNAV Cat C visibility ¼ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Poplar Bluff altimeter setting.

NA

MISSED APPROACH: Climb to 2100 direct GOSTE and hold.

AWOS-3	MEMPHIS CENTER	UNICOM
119.825	133.65 292.15	122.8 (CTAF) L

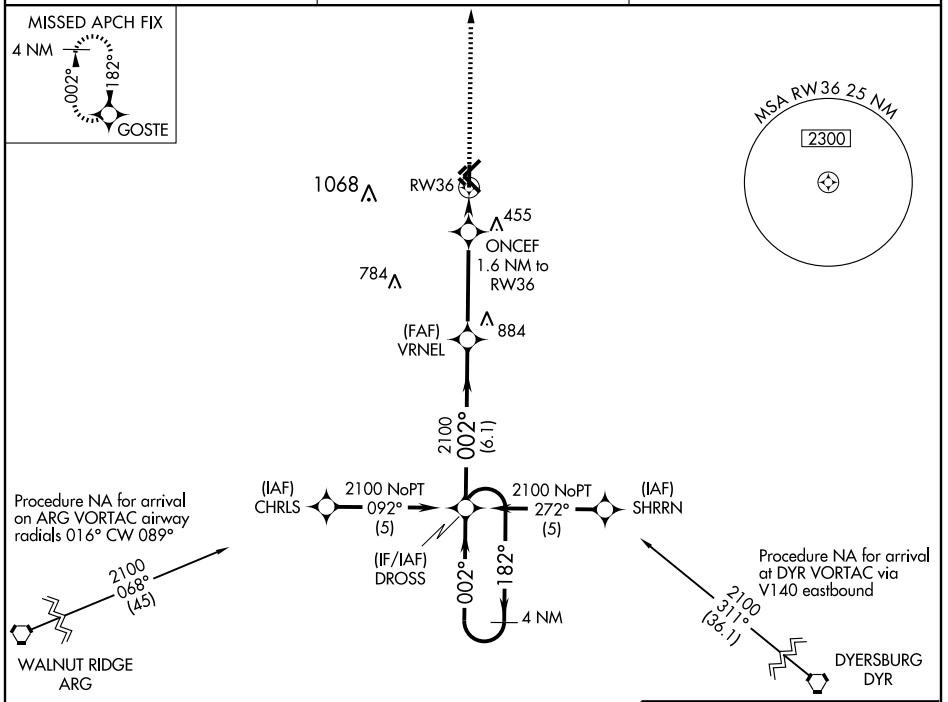

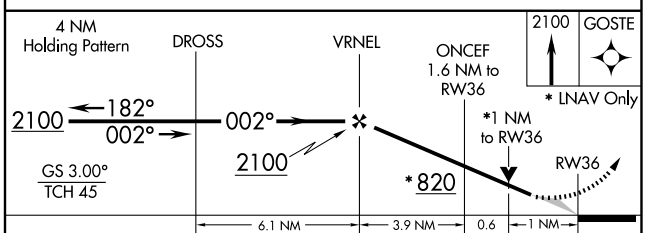

CATEGORY	A	B	C	D
LPV DA	543-1 250 (300-1)			NA
LNAV/VNAV DA	698-1½ 405 (500-1½)			NA
LNAV MDA	660-1 367 (400-1)			NA
CIRCLING	720-1 426 (500-1)	820-1 526 (600-1)	820-1½ 526 (600-1½)	NA

ELEV 294

REIL Rwys 14 and 32 L

MIRL Rwys 14-32 and 18-36 L

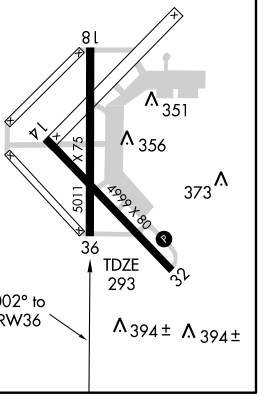

NC-3, 22 OCT 2009 to 19 NOV 2009
NC-3, 22 OCT 2009 to 19 NOV 2009