RNAV (GPS) RWY 9R

ORLANDO SANFORD INTL (SFB)

WAAS	APP CRS	Rwy Idg	5000
CH 48810	095°	TDZE	47
W09B		Apt Elev	55

Circling to Rwy 27L NA at night. Baro-VNAV NA when using Executive altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C (5° F) or above 48° C (118° F). DME/DME RNP-0.3 NA. VDP NA when using Executive altimeter setting. When local altimeter setting not received, use Executive altimeter setting and increase LPV DA to 426, LNAV/VNAV DA to 520, all MDA 60 feet and LNAV/VNAV visibility ¼ mile all Cats., LNAV visibility Cats. C and D ¼ mile.

MALSR

MISSED APPROACH: Climb to 1600 direct WEPAT and hold.

ATIS	ORLANDO APP CON	SANFORD TOWER★	GND CON	CLNC DEL
125.975	121.1 351.9	120.3(CTAF) L 381.65	121.35 381.65	123.975 *121.35
				*when tower closed

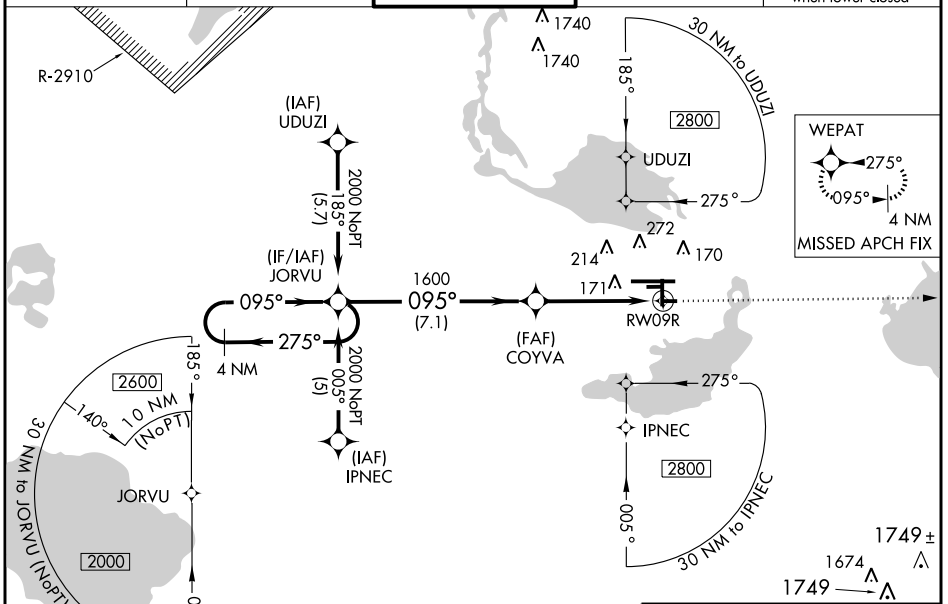

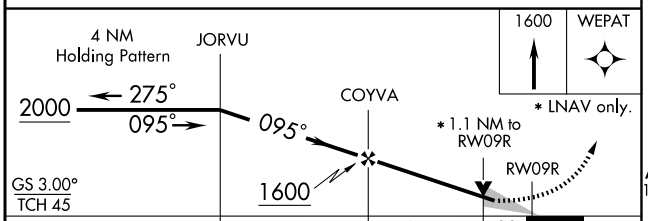

CATEGORY	A	B	C	D
LPV DA	383-1¼ 336 (400-1¼)			
LNAV/VNAV DA	477-1½ 430 (500-1½)			
LNAV MDA	440-1 393 (400-1)			440-1¼ 393 (400-1¼)
CIRCLING	580-1 525 (600-1)		580-1½ 525 (600-1½)	620-2 565 (600-2)

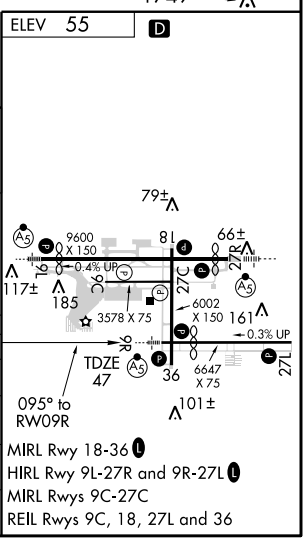

SE-3, 22 OCT 2009 to 19 NOV 2009
SE-3, 22 OCT 2009 to 19 NOV 2009