WAAS	APP CRS	Rwy Idg	6502
Chan 93700	132°	TDZE	1077
W13A		Apt Elev	1077

RNAV (GPS) RWY 13

DUBUQUE RGNL (DBQ)

T Inoperative table does not apply to LPV and LNAV/VNAV. Baro-VNAV NA when using Monticello altimeter setting.
A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (116°F). DME/DME RNP-0.3 NA. VDP NA when using Monticello altimeter setting. If local altimeter setting not received, use Monticello altimeter setting and increase all DAs/MDAs 100 feet.

MALS

MISSED APPROACH: Climb to 3100 direct JIPDA and hold.

ATIS	CHICAGO CENTER	DUBUQUE TOWER ★	GND CON	UNICOM
127.25	133.95 281.4	119.5 (CTAF) L 254.4	121.8	122.95

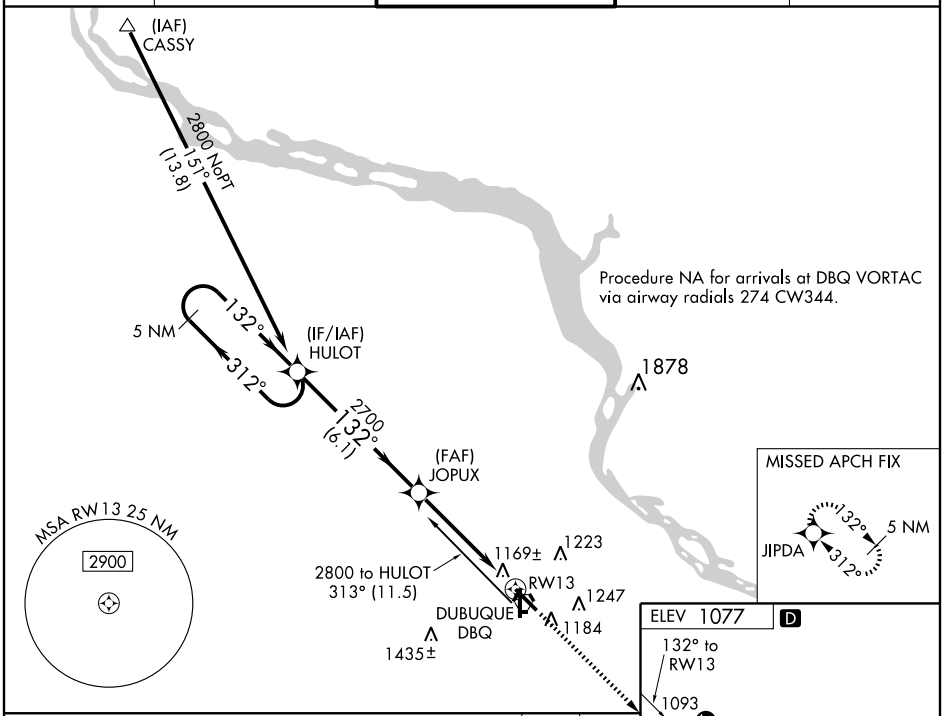

CATEGORY	A	B	C	D
LPV DA	1393-1 316 (400-1)			
LNAV/VNAV DA	1574-1¾ 497 (500-1¾)			
LNAV MDA	1420-¾ 343 (400-¾)			1420-1¼ 343 (400-1¼)
CIRCLING	1580-1¾ 503 (600-1¾)			1640-2 563 (600-2)

NC-3, 22 OCT 2009 to 19 NOV 2009
NC-3, 22 OCT 2009 to 19 NOV 2009