WAAS	APP CRS	Rwy Idg	5602
CH 61099	353°	TDZE	1307
W35A		Apt Elev	1324

RNAV (GPS) RWY 35

BEATRICE MUNI (BIE)

If local altimeter setting not received, use Lincoln altimeter setting and increase all DAs/MDAs 100 feet. DME/DME RNP-0.3 NA. BARO-VNAV NA below -17°C (3°F). BARO-VNAV and VDP NA when using Lincoln altimeter setting. For inoperative MALSR, increase LPV visibility to 1 all Cats, and LNAV Cat A/B visibility to 1.

MALSR

MISSED APPROACH: Climb to 3900 direct HAMUL and hold.

AWOS-3	MINNEAPOLIS CENTER	COLUMBUS RADIO	UNICOM
124.675	126.4 317.7	122.5	122.8 (CTAF) L

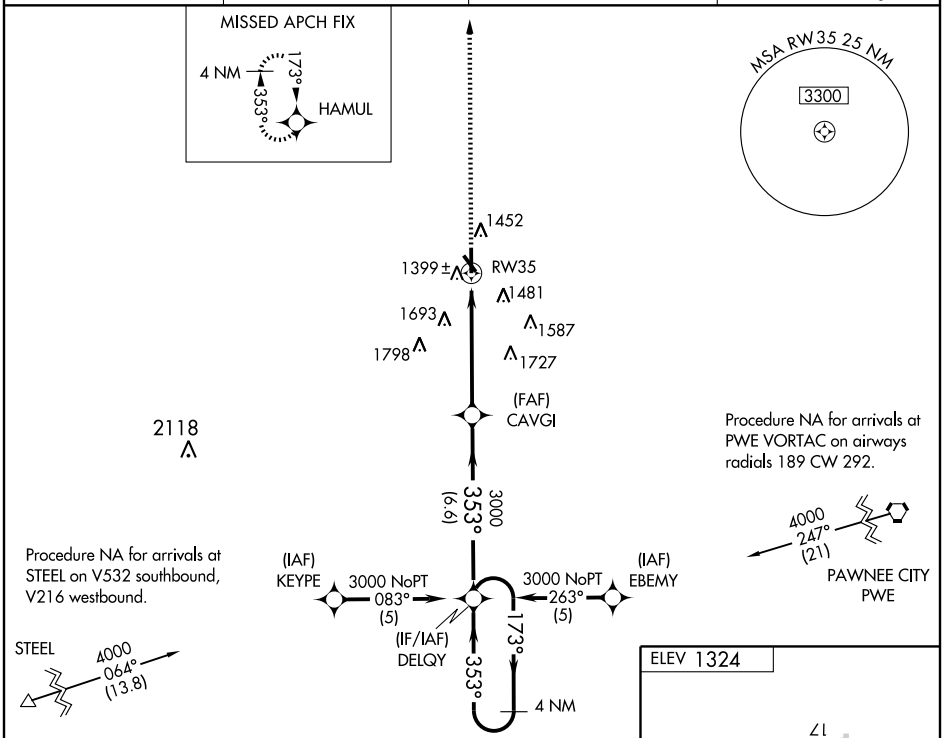

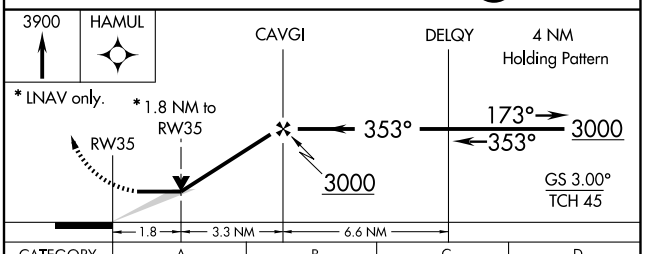

CATEGORY	A	B	C	D
LPV DA	1557-¾ 250 (300-¾)			
LNAV/VNAV DA	1796-1¼ 489 (500-1¼)			
LNAV MDA	1920-¾ 613 (700-¾)		1920-1¼ 613 (700-1¼)	1920-1½ 613 (700-1½)
CIRCLING	1920-1¾ 596 (600-1¾)			2060-2¼ 736 (800-2¼)

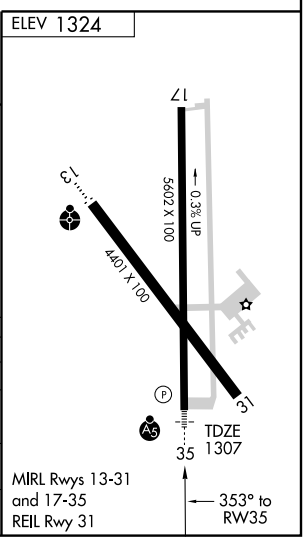

NC-2, 22 OCT 2009 to 19 NOV 2009
NC-2, 22 OCT 2009 to 19 NOV 2009