VOR/DME JVL	APP CRS	Rwy Idg	6700
114.3	034°	TDZE	805
Chan 90		Apt Elev	808

VOR RWY 4

JANESVILLE/SOUTHERN WISCONSIN RGNL (JVL)

When control tower closed, obtain local altimeter setting on UNICOM; when not received use Rockford altimeter setting and increase all MDAs 80 feet. For inoperative MALSR, increase S-4 Cat. D visibility ¼ mile. Circling not authorized at night to Rwy 18.

MALSR

MISSED APPROACH: Climb to 1700, then climbing right turn to 3100 direct JVL VOR/DME and hold.

ATIS	ROCKFORD APP CON	JANESVILLE TOWER ★	GND CON	CLNC DEL	UNICOM
128.25	121.0 327.0	118.8 (CTAF) L 225.4	121.65	121.65	122.95

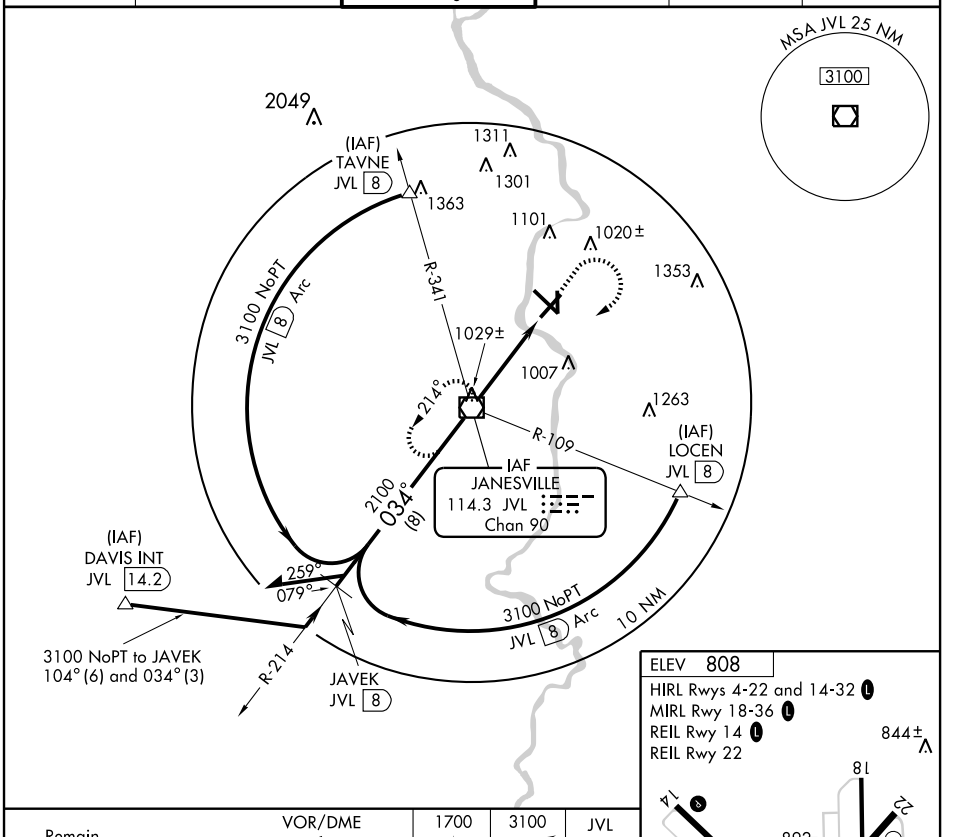

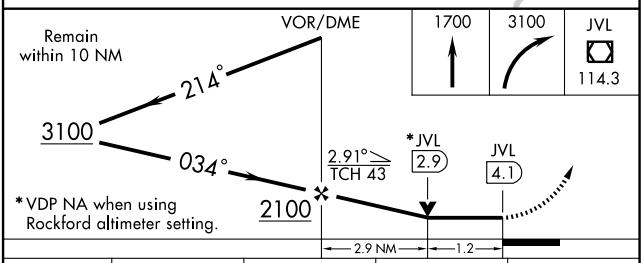

CATEGORY	A	B	C	D
S-4	1220-½ 415 (500-½)		1220-¾ 415 (500-¾)	1220-1 415 (500-1)
CIRCLING	1260-1 452 (500-1)		1280-1½ 472 (500-1½)	1420-2 612 (700-2)

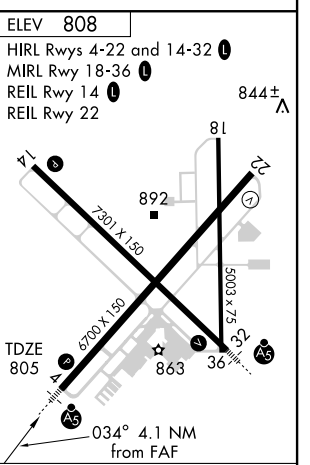

FAF to MAP 4.1 NM					
Knots	60	90	120	150	180
Min:Sec	4:06	2:44	2:03	1:38	1:22

EC-3, 22 OCT 2009 to 19 NOV 2009
EC-3, 22 OCT 2009 to 19 NOV 2009