WAAS CH 77805 W23A	APP CRS 229°	Rwy Idg 5005 TDZE 141 Apt Elev 142

RNAV (GPS) RWY 23
LAKELAND LINDER RGNL (LAL)

Baro-VNAV NA when using Plant City Muni altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F).
DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
When control tower closed, use Plant City Muni altimeter setting and increase all DAs/MDAs 20 feet.
VDP NA when using Plant City Muni altimeter setting.

MISSED APPROACH: Climb to 2000 direct BIYAT and right turn via 328° track to MIREE then via 012° track to PLUMY and hold.

ATIS	TAMPA APP CON	LAKELAND TOWER ★	GND CON	UNICOM
118.025	120.65 290.3	124.5 (CTAF) L	121.4	122.95

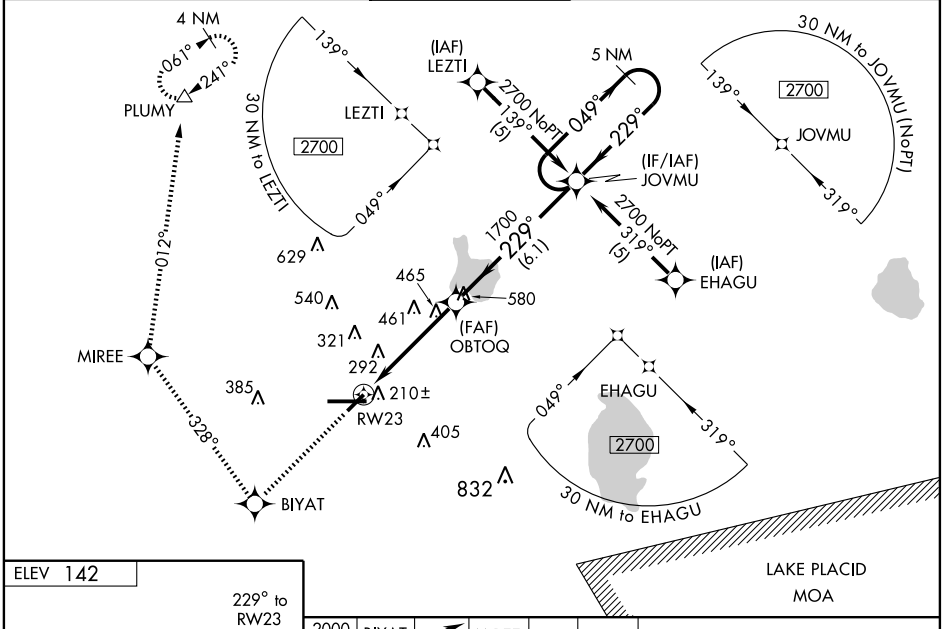

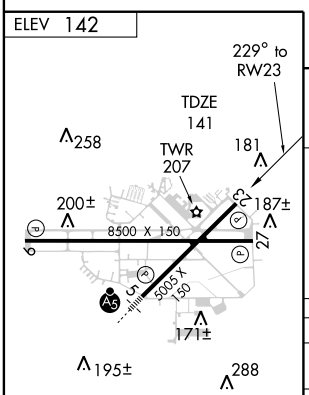

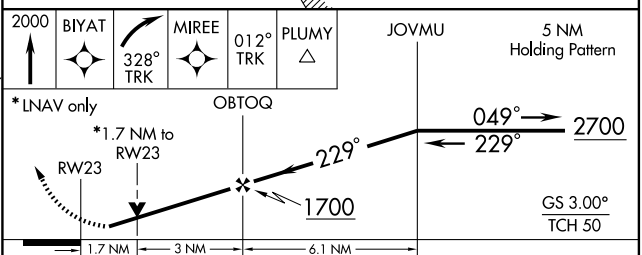

CATEGORY	A	B	C	D
LPV DA	426-1 285 (300-1)			
LNAV/ VNAV DA	480-1¼ 339 (400-1¼)			
LNAV MDA	720-1 579 (600-1)		720-1½ 579 (600-1½)	720-1¾ 579 (600-1¾)
CIRCLING	720-1 578 (600-1)		720-1½ 578 (600-1½)	720-2 578 (600-2)

HIRL Rwys 5-23 and 9-27

SE-3, 22 OCT 2009 to 19 NOV 2009
SE-3, 22 OCT 2009 to 19 NOV 2009