

# NDB RWY 4


DETROIT / GROSSE ILE MUNI (ONZ)

|                       |                        |                        |
|-----------------------|------------------------|------------------------|
| NDB RYS<br><b>419</b> | APP CRS<br><b>044°</b> | Rwy Idg<br><b>4846</b> |
|                       |                        | TDZE<br><b>590</b>     |
|                       |                        | Apt Elev<br><b>591</b> |

**⚠** Visibility reduction by helicopters NA. When local altimeter setting not received, use Detroit Metropolitan Wayne County altimeter setting and increase all MDA 40 feet. Increase AHLES fix minimums Circling Cat A, C, and D visibilities ¼ mile.



**MISSED APPROACH:** Climb to 1900 then climbing right turn to 2400 direct RYS NDB and hold.

|                          |                                       |                       |                                 |
|--------------------------|---------------------------------------|-----------------------|---------------------------------|
| AWOS-3<br><b>119.675</b> | DETROIT APP CON<br><b>134.3 363.2</b> | GCO<br><b>121.725</b> | UNICOM<br><b>123.0 (CTAF) ①</b> |
|--------------------------|---------------------------------------|-----------------------|---------------------------------|

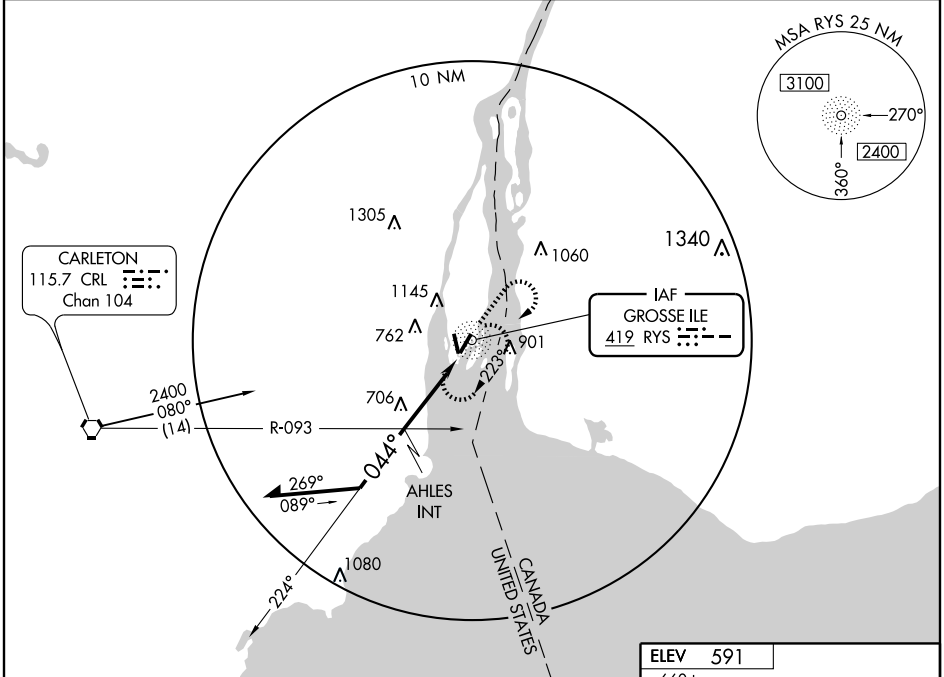

EC-1, 22 OCT 2009 to 19 NOV 2009

EC-1, 22 OCT 2009 to 19 NOV 2009

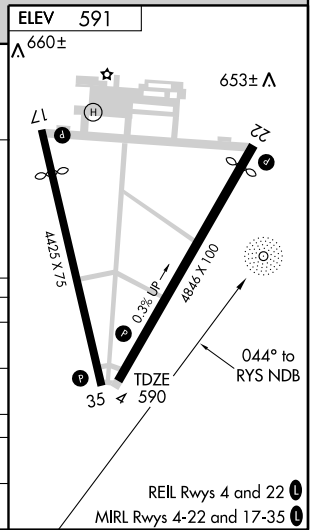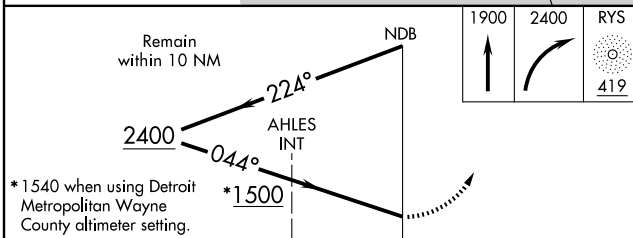

| CATEGORY           | A                       | B                         | C                          | D                         |
|--------------------|-------------------------|---------------------------|----------------------------|---------------------------|
| S-4                | 1500-1¼                 | 910 (1000-1¼)             | 1500 - 2¾<br>910 (1000-2¾) | 1500 - 3<br>910 (1000-3)  |
| CIRCLING           | 1500-1¼                 | 909 (1000-1¼)             | 1500 - 2¾<br>909 (1000-2¾) | 1500 - 3<br>909 (1000-3)  |
| AHLES FIX MINIMUMS |                         |                           |                            |                           |
| S-4                | 1140 - 1                | 550 (600-1)               | 1140 - 1½<br>550 (600-1½)  | 1140 - 1¾<br>550 (600-1¾) |
| CIRCLING           | 1460 - 1<br>869 (900-1) | 1460 - 1¼<br>869 (900-1¼) | 1460 - 2½<br>869 (900-2½)  | 1460 - 2¾<br>869 (900-2¾) |