

ILS or LOC RWY 10

CAPE GIRARDEAU RGNL (CGI)





| | | | |
|---|------------------------|-----------------------------|---|
| LOC I-CGI 109.5 Chan 32 | APP CRS 105° | Rwy Idg TDZE Apt Elev | 6499 338 342 |
|---|------------------------|-----------------------------|---|

▼ When local altimeter setting not received, use Cairo Rgnl altimeter setting and increase all DA 48 feet, increase all MDA 60 feet, increase ZAXOD fix minimums Circling Cats C, D visibility 1/4 mile. VDP NA when using Cairo Rgnl altimeter setting. ADF Required.

▲ MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct DUTCH LOM/I-CGI 7.2 DME and hold.

| | | | | |
|-----------------------|--|--|-------------------------|-------------------------|
| ASOS 120.55 | MEMPHIS CENTER 133.65 292.15 | CAPE GIRARDEAU TOWER * 125.525 (CTAF) 0 | GND CON 121.6 | UNICOM 122.95 |
|-----------------------|--|--|-------------------------|-------------------------|

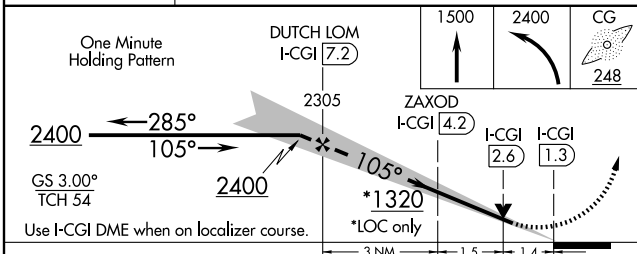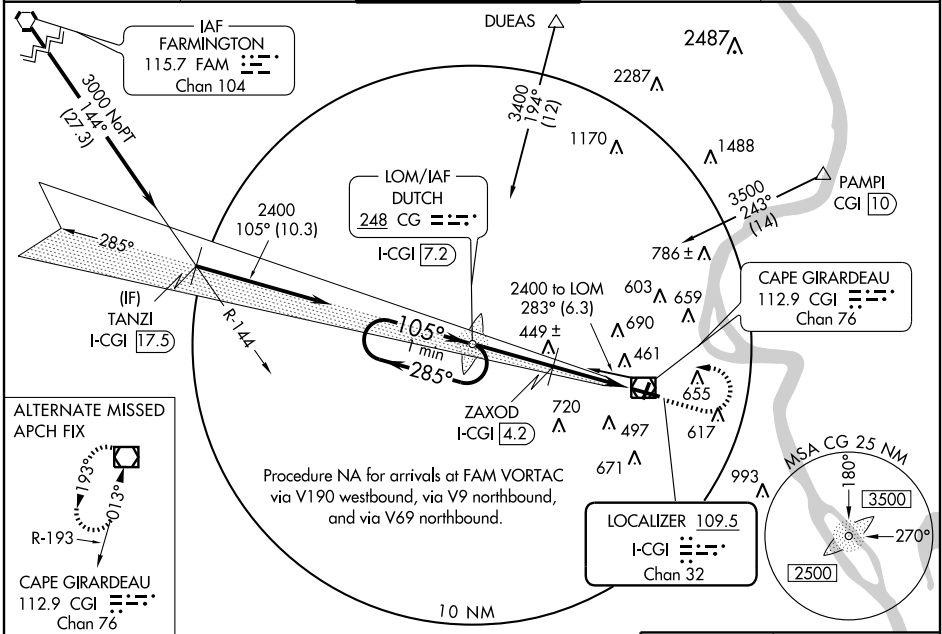

| CATEGORY | A | B | C | D |
|---------------------------|--------------------------------|--------------------------------|------------------------------|------------------------------|
| S-ILS 10 | | 538-1/2 | 200 (200-1/2) | |
| S-LOC 10 | 1320-3/4 982 (1000-3/4) | 1320-1 982 (1000-1) | 1320-2 1/2 | 982 (1000-2 1/2) |
| CIRCLING | 1320-1 1/4 978 (1000-1 1/4) | 1320-1 1/2 978 (1000-1 1/2) | 1320-3 | 978 (1000-3) |
| ZAXOD FIX MINIMUMS | | | | |
| S-LOC 10 | 860-1/2 | 522 (600-1/2) | 860-1 522 (600-1) | 860-1 1/4 522 (600-1 1/4) |
| CIRCLING | 860-1 518 (600-1) | 960-1 618 (700-1) | 960-1 3/4 618 (700-1 3/4) | 1000-2 658 (700-2) |

MIRL Rwy 2-20
HIRL Rwy 10-28

FAF to MAP 5.9 NM

| | | | | | |
|---------|------|------|------|------|------|
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 5:54 | 3:56 | 2:57 | 2:22 | 1:58 |

NC-3, 22 OCT 2009 to 19 NOV 2009

NC-3, 22 OCT 2009 to 19 NOV 2009