

EASTOVER, SOUTH CAROLINA

NDB RWY 32


| | | | | |
|-----------------------|-------------------------|---|---------------|-----------------------|
| NDB MMT 427 | APCH CRS 343° | Rwy Idg TDZE 243 Arprt Elev 252 | AL-951 [USAF] | MC ENTIRE JNGB (KMMT) |
|-----------------------|-------------------------|---|---------------|-----------------------|

* When ALS inop, increase CAT AB RVR to 50, vis to 1 mile, CAT C vis to 1½ miles, CAT D vis to 1¾ miles.

 ALSF-1

 MISSED APPROACH: Climb straight ahead to 1500 then climbing right turn to 2000 direct MMT NDB and hold.

| | | | |
|------------------------------------|--|-----------------------------------|---------|
| SHAW APP CON 125.4 385.6 | MC ENTIRE TOWER ★ 132.4 (CTAF) 253.5 | GND CON 127.625 226.675 | ASR/PAR |
|------------------------------------|--|-----------------------------------|---------|


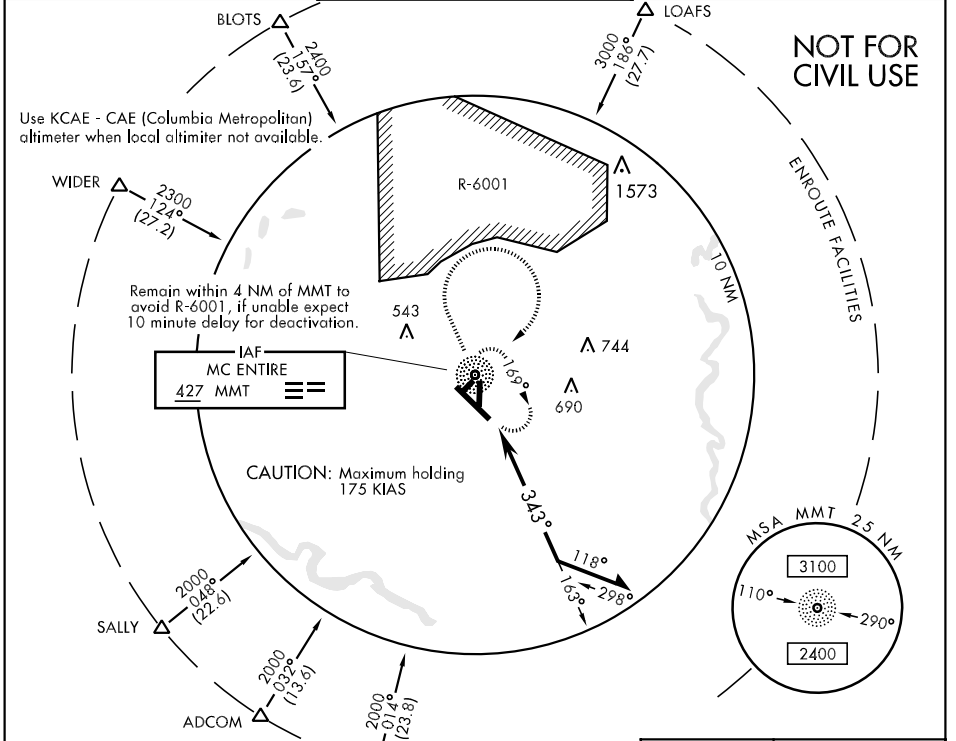


NOT FOR CIVIL USE

SE-2, 22 OCT 2009 to 19 NOV 2009

SE-2, 22 OCT 2009 to 19 NOV 2009

| | |
|----------------------------|----------|
| EMERG SAFE ALT 100 NM 3900 | ELEV 252 |
|----------------------------|----------|

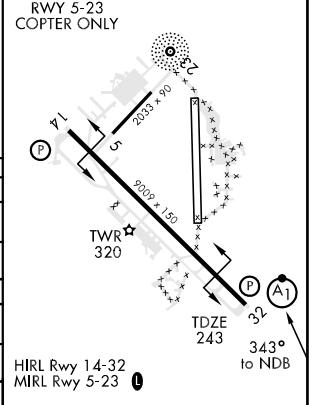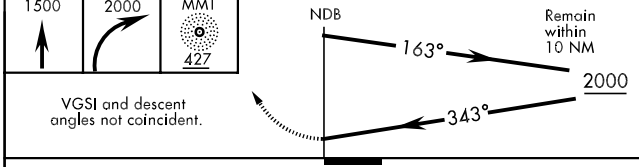

| CATEGORY | A | B | C | D |
|-------------------------------------|----------------------|----------------------|------------------------|------------------------|
| S-32 * | 800/40 | 557 (600-¾) | 800/50 557 (600-1) | 800/60 557 (600-1¼) |
| CIRCLING | 840-1 588 (600-1) | 860-1 608 (700-1) | 880-1¾ 628 (700-1¾) | 880-2 628 (700-2) |
| COLUMBIA ALTIMETER SETTING MINIMUMS | | | | |
| S-32 * | 840/40 | 597 (600-¾) | 840/50 597 (600-1) | 840/60 597 (600-1¼) |
| CIRCLING | 880-1 628 (700-1) | 900-1 648 (700-1) | 920-1¾ 668 (700-1¾) | 920-2 668 (700-2) |
| S-PAR 32 | 443/24 | | 200 (200-½) | 2.50° |