WAAS CH 45807 W08A	APP CRS 076°	Rwy Idg 11200 TDZE 944 Apt Elev 944

RNAV (GPS) Y RWY 8L
ONTARIO INTL (ONT)

DME/DME RNP -0.3 NA. Circling NA north of Rwy 8L-26R.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F).
VDP and Baro-VNAV NA when using Chino altimeter setting.
When local altimeter setting not received, use Chino altimeter setting and increase all DAs/MDAs 60 feet and all visibilities ½ mile.
For inoperative MALSR increase LPV visibility all Cats to RVR 6000.

MALSR

MISSED APPROACH: Climb to 4400 direct CABUB and via 166° track to PDZ VORTAC and hold, continue climb-in-hold to 4400.

ATIS	SOCAL APP CON	ONTARIO TOWER	GND CON	CLNC DEL
124.25	127.25 318.2	120.6 360.775	121.9 257.8	118.1

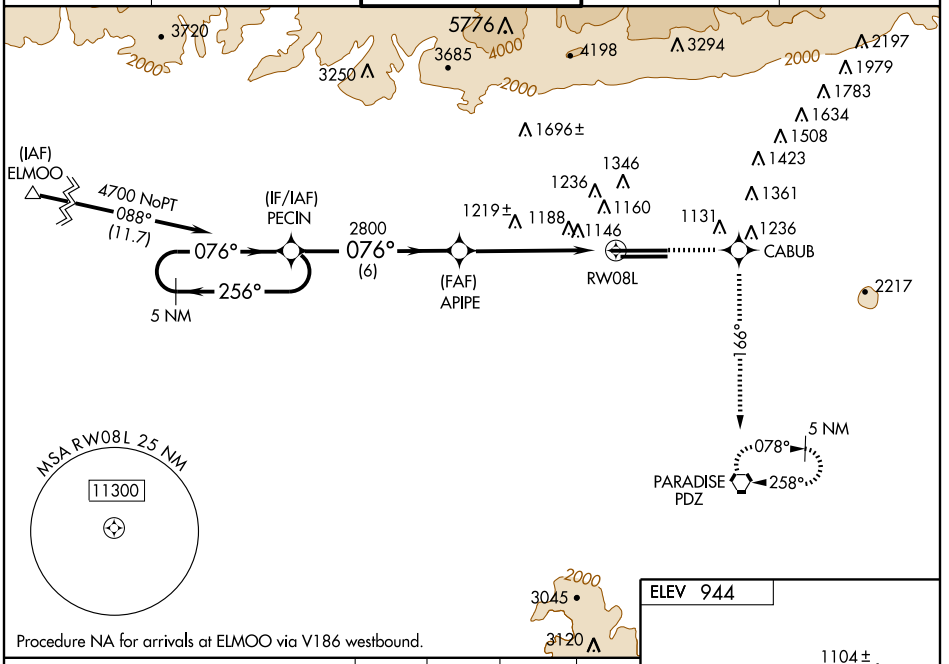

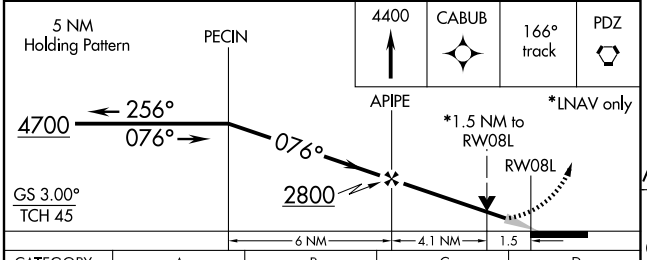

CATEGORY	A	B	C	D
LPV DA	1266/40 322 (400-¾)			
LNAV/VNAV DA	1520-1½ 576 (600-1½)			
LNAV MDA	1480/24 536 (600-½)		1480/50 536 (600-1)	1480/60 536 (600-1¼)
CIRCLING	1480-1 536 (600-1)		1480-1½ 536 (600-1½)	1500-2 556 (600-2)

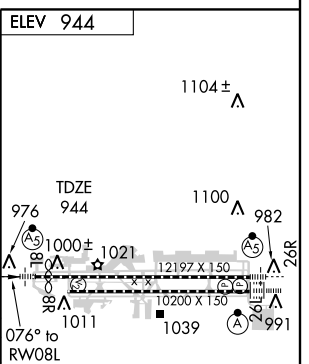

TDZ/CL Rwys 8L and 26L
HIRL Rwys 8L-26R and 8R-26L

SW-3, 22 OCT 2009 to 19 NOV 2009
SW-3, 22 OCT 2009 to 19 NOV 2009