| LOC/DME I-RUT | APP CRS | Rwy Idg 5000 |
|---|---|---|
| 111.7 | 194° | TDZE 787 |
| Chan 54 | | Apt Elev 787 |

# LOC Y RWY 19

## RUTLAND-SOUTHERN VERMONT RGNL (RUT)

T NA — Circling NA east of Rwy 19 and 31. DME required. When local altimeter setting not received, use Springfield altimeter setting and increase all MDA 500 feet. VDP NA when using Springfield altimeter setting. CHITT FIX Straight-In minima NA when using Springfield altimeter setting. Inoperative table does not apply to S-19 Cat A and B.

MALSR

MISSED APPROACH: Climb to 5700 via RUT VOR/DME and RUT VOR/DME R-225 to FAROX/RUT 7.5 DME and right turn via CAM VOR/DME R-033 to KOPVE INT/I-RUT 17 DME and hold.

| AWOS-3 | BOSTON CENTER | UNICOM |
|---|---|---|
| 118.375 | 135.7 282.2 | 122.8 (CTAF) L |

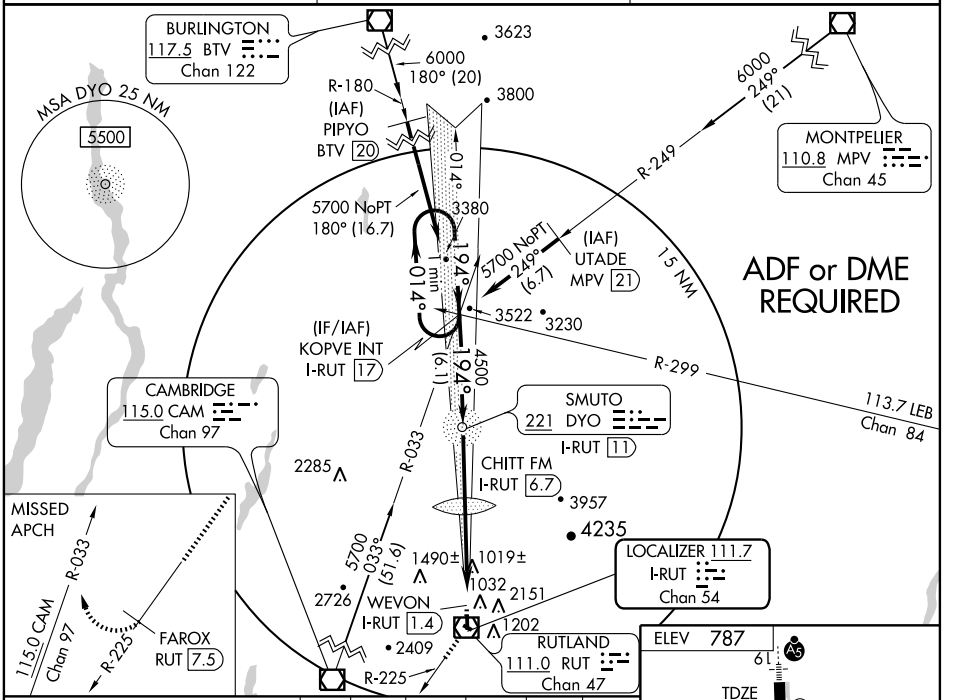


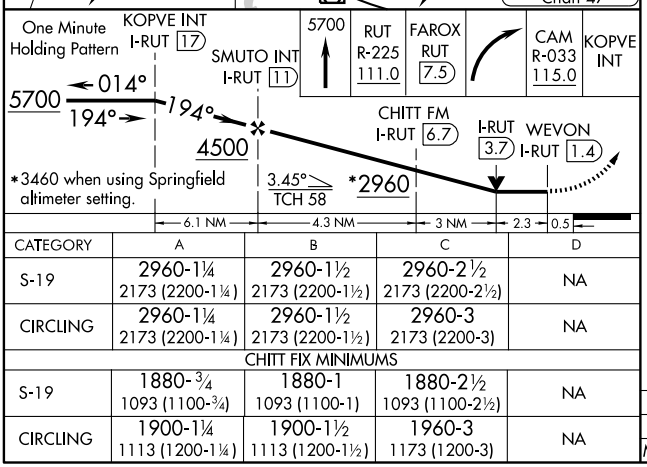


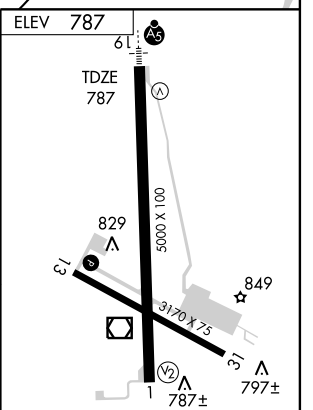


REIL Rwys 13 and 19 L
MIRL Rwys 1-19 and 13-31 L

| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-19 | 2960-1¼<br>2173 (2200-1¼) | 2960-1½<br>2173 (2200-1½) | 2960-2½<br>2173 (2200-2½) | NA |
| CIRCLING | 2960-1¼<br>2173 (2200-1¼) | 2960-1½<br>2173 (2200-1½) | 2960-3<br>2173 (2200-3) | NA |
| CHITT FIX MINIMUMS | | | | |
| S-19 | 1880-¾<br>1093 (1100-¾) | 1880-1<br>1093 (1100-1) | 1880-2½<br>1093 (1100-2½) | NA |
| CIRCLING | 1900-1¼<br>1113 (1200-1¼) | 1900-1½<br>1113 (1200-1½) | 1960-3<br>1173 (1200-3) | NA |

| FAF to MAP 9.6 NM | | | | | |
|---|---|---|---|---|---|
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 9:36 | 6:24 | 4:48 | 3:50 | 3:12 |

NE-1, 22 OCT 2009 to 19 NOV 2009

NE-1, 22 OCT 2009 to 19 NOV 2009