VORTAC CVA	APP CRS	Rwy Idg	5204
113.8	040°	TDZE	700
Chan 85		Apt Elev	708

VOR RWY 3
CLINTON MUNI (CWI)

Inoperative table does not apply.
VDP NA when using Davenport altimeter setting.
When local altimeter setting not received, use Davenport altimeter setting and increase all MDA 60 feet and visibility S-3 Cat C and circling Cat C ¼ mile.

MALSR

MISSED APPROACH: Climb to 3000 then left turn direct CVA VORTAC and hold.

AWOS-3	QUAD CITY APP CON ★	CLNC DEL	UNICOM
125.525	125.95 257.8	118.5 L	122.8 (CTAF)

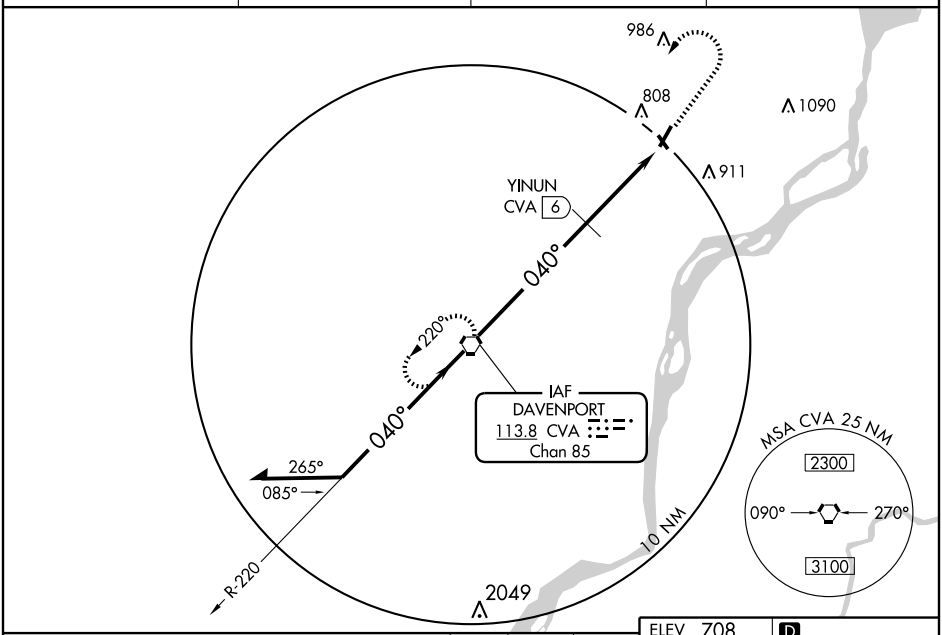

* 1400 when using Davenport altimeter setting.

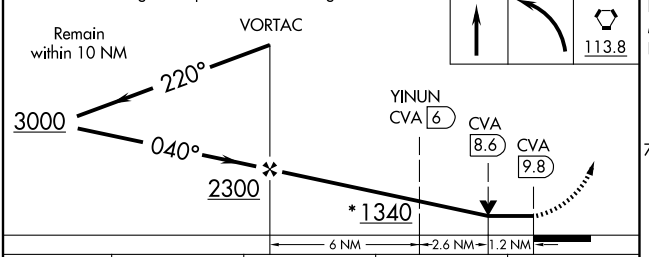

CATEGORY	A	B	C	D
S-3	1340-1 640 (700-1)		1340-1¾ 640 (700-1¾)	NA
CIRCLING	1340-1 632 (700-1)		1340-1¾ 632 (700-1¾)	NA
YINUN MINIMUMS				
S-3	1120-1 420 (500-1)		1120-1¼ 420 (500-1¼)	NA
CIRCLING	1140-1 432 (500-1)	1200-1 492 (500-1)	1200-1½ 492 (500-1½)	NA

ELEV 708 D

REIL Rwys 14 and 21 L
MIRL Rwy 14-32 L
HIRL Rwy 3-21 L

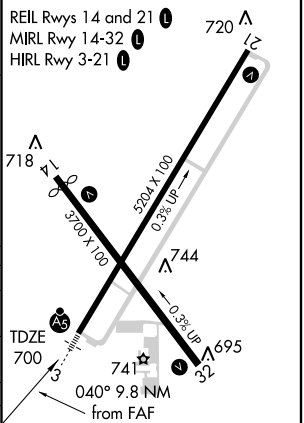

FAF to MAP 9.8 NM					
Knots	60	90	120	150	180
Min:Sec	9:48	6:32	4:54	3:55	3:16

NC-3, 22 OCT 2009 to 19 NOV 2009

NC-3, 22 OCT 2009 to 19 NOV 2009