WAAS	APP CRS	Rwy Idg	4158
CH 86604	245°	TDZE	144
W25A		Apt Elev	152

RNAV (GPS) RWY 25
GAINESVILLE RGNL (GNV)

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
Baro-VNAV NA when using Ocala Intl-Jim Taylor altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F).
ASR If local altimeter setting not received, use Ocala Intl-Jim Taylor altimeter setting and increase LPV DA to 494 feet, LNAV/VNAV DA to 694 feet, and increase all MDAs 100 feet.

MISSED APPROACH: Climb to 2100 direct GUZNU and hold.

ATIS	JACKSONVILLE APP CON	GAINESVILLE TOWER★	GND CON
127.15	118.175 338.25	119.55 (CTAF) L 353.7	121.7

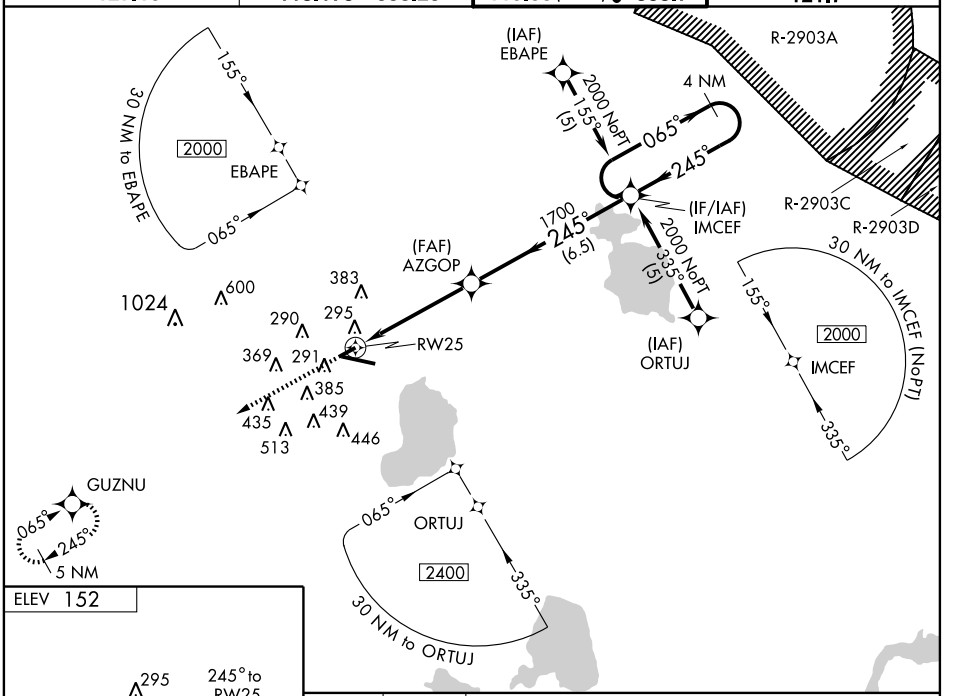

SE-3, 22 OCT 2009 to 19 NOV 2009

SE-3, 22 OCT 2009 to 19 NOV 2009

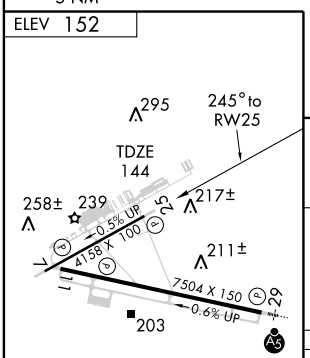

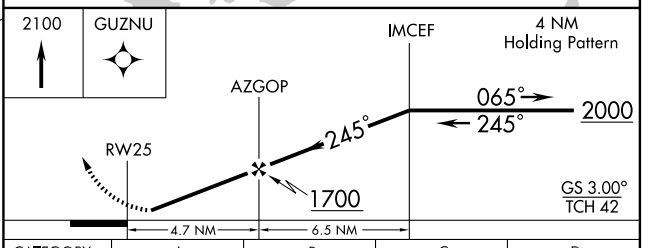

CATEGORY	A	B	C	D
LPV DA	413-1 269 (300-1)			
LNAV/VNAV DA	555-1½ 411 (500-1½)			
LNAV MDA	560-1 416 (500-1)		560-1¼ 416 (500-1¼)	
CIRCLING	620-1 468 (500-1)		620-1½ 468 (500-1½)	740-2 588 (600-2)