LOC/DME I-TGN	APP CRS	Rwy Idg 10600
109.9	069°	TDZE 128
Chan 36		Apt Elev 152

ILS or LOC/DME RWY 7L

ANCHORAGE/TED STEVENS ANCHORAGE INTL (ANC) (PANC)

RVR predicated on Rwy 7R midfield transmissometer. For inoperative MALSR, increase S-LOC 7L Cat D visibility to RVR 5000 and Cat E to RVR 6000.

MALSR

MISSED APPROACH: Climb to 600 then climbing right turn to 2500 via heading 200° and ANC R-173 to NAPTO INT/ ANC 21.8 DME and hold.

ATIS	ANCHORAGE APP CON	ANCHORAGE TOWER	GND CON	CLNC DEL
118.4	118.6 290.5	118.3 257.8	121.9 338.25	119.4 323.1

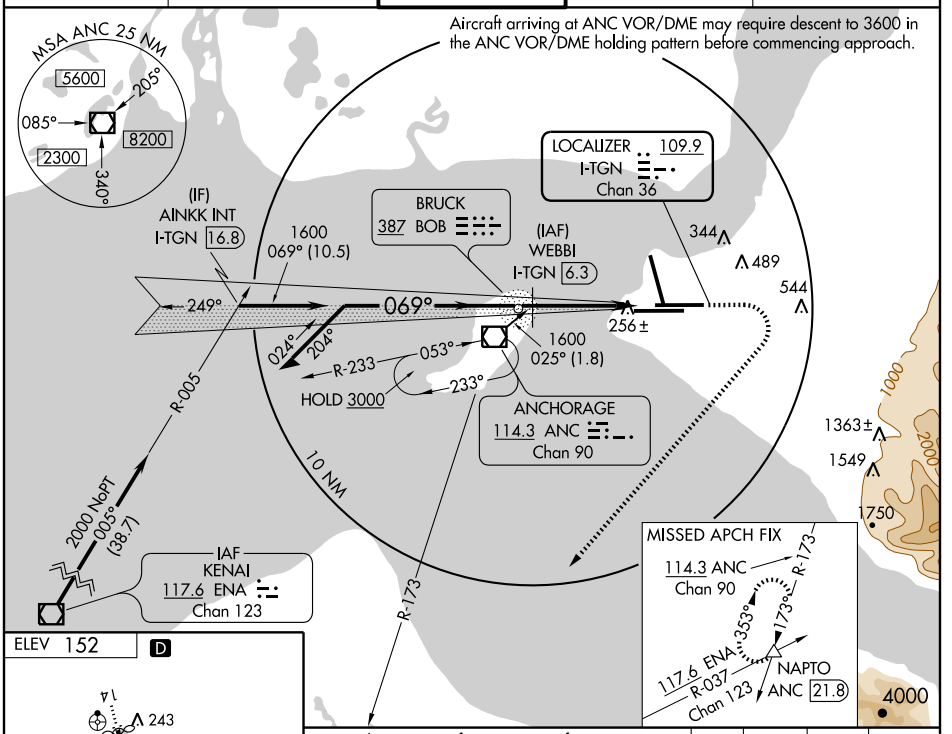

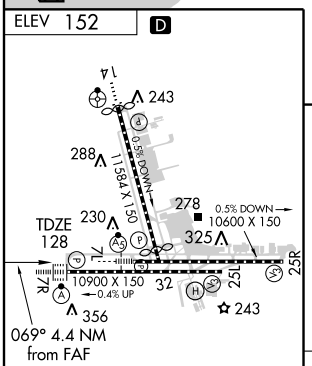

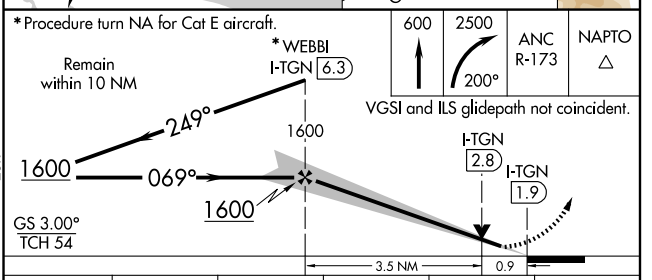

CATEGORY	A	B	C	D	E
S-ILS 7L	328/18 200 (200-½)				328/24 200 (200-½)
S-LOC 7L	460/24 332 (400-½)			460/40 332 (400-¾)	
CIRCLING	740-1 588 (600-1)		740-1½ 588 (600-1½)	800-2 648 (700-2)	920-2¾ 768 (800-2¾)

REIL Rwy 32
TDZ/CL Rwy 7R
HIRL all Rwys

AK, 22 OCT 2009 to 17 DEC 2009
AK, 22 OCT 2009 to 17 DEC 2009