

ILS or LOC RWY 27


TALLAHASSEE RGNL (TLH)

LOC I-PLQ 111.9	APP CRS 272°	Rwy Idg 8000	TDZE 53
		Apt Elev 81	

▲ If local altimeter setting not received, use Bainbridge, GA altimeter setting and increase DA to 348 and all MDA's 100 feet. When ALS inoperative, increase visibility Cat E S-ILS ¼ mile, S-LOC ½ mile.

ALSF-2 MISSED APPROACH: Climb to 2000 then climbing right turn to 4000 via heading 090° and SZW R-141 to GACED Int and hold, continue climb-in-hold to 4000.



ATIS 119.45 239.25	TALLAHASSEE APP CON* 135.8 317.4	TALLAHASSEE TOWER* 118.7(CTAF) 257.8	GND CON 121.9 348.6	CLNC DEL 126.65 275.8	UNICOM 122.95
------------------------------	--	--	-------------------------------	---------------------------------	-------------------------

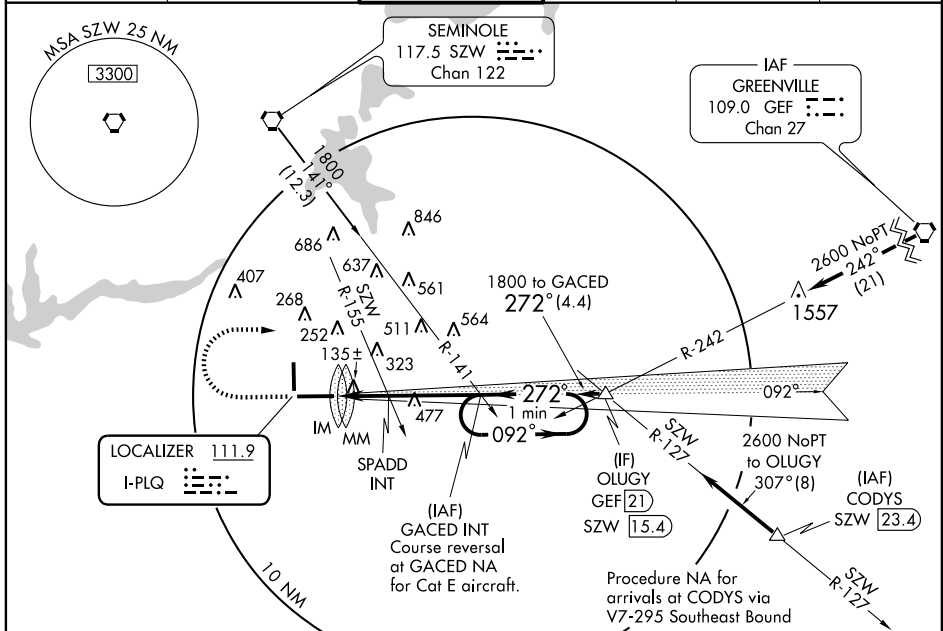

SE-3, 22 OCT 2009 to 19 NOV 2009

SE-3, 22 OCT 2009 to 19 NOV 2009

ELEV 81

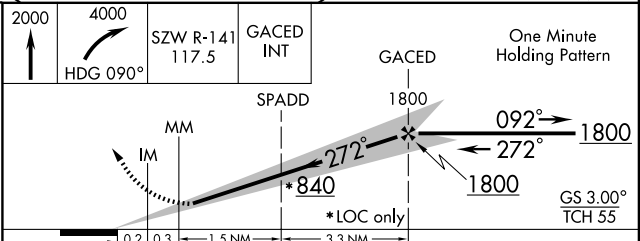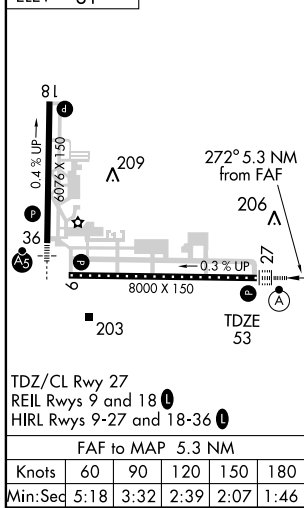

CATEGORY	A	B	C	D	E
S-ILS 27	253/18 200 (200-½)				253/24 200 (200-½)
S-LOC 27	840/24 787 (800-½)	840/40 787 (800-¾)	840-1¾ 787 (800-1¾)	840-2 787 (800-2)	840-2¼ 787 (800-2¼)
CIRCLING	840-1 759 (800-1)	840-1¼ 759 (800-1¼)	840-2¼ 759 (800-2¼)	840-2½ 759 (800-2½)	1000-3 919 (1000-3)
SPADD INT MINIMUMS					
S-LOC 27	400/24 347 (400-½)			400/40	347 (400-¾)
CIRCLING	540-1 459 (500-1)		580-1½ 499 (500-1½)	640-2 559 (600-2)	1000-3 919 (1000-3)