LOC I-PTK	APP CRS	Rwy Idg	6200
111.1	092°	TDZE	980
		Apt Elev	980

ILS or LOC RWY 9R

PONTIAC/OAKLAND COUNTY INTL (PTK)

▼ ▲ *RVR 1800 authorized with the use of FD or AP or HUD to DA. When local altimeter setting not received, use Coleman A. Young Muni altimeter setting and increase DA 105 feet and all MDA 120 feet, increase S-LOC 9R Cats C and D visibility ½ mile, circling Cat B visibility ¼ mile, Cats C and D visibility ½ mile.

MALSR

MISSED APPROACH: Climb to 1600, then climbing right turn to 3000 direct SVM VORTAC and hold.

ATIS	DETROIT APP CON	PONTIAC TOWER★	GND CON	CLNC DEL	UNICOM
125.025	127.5 363.2	120.5 (CTAF)	121.9	118.25	122.95 L

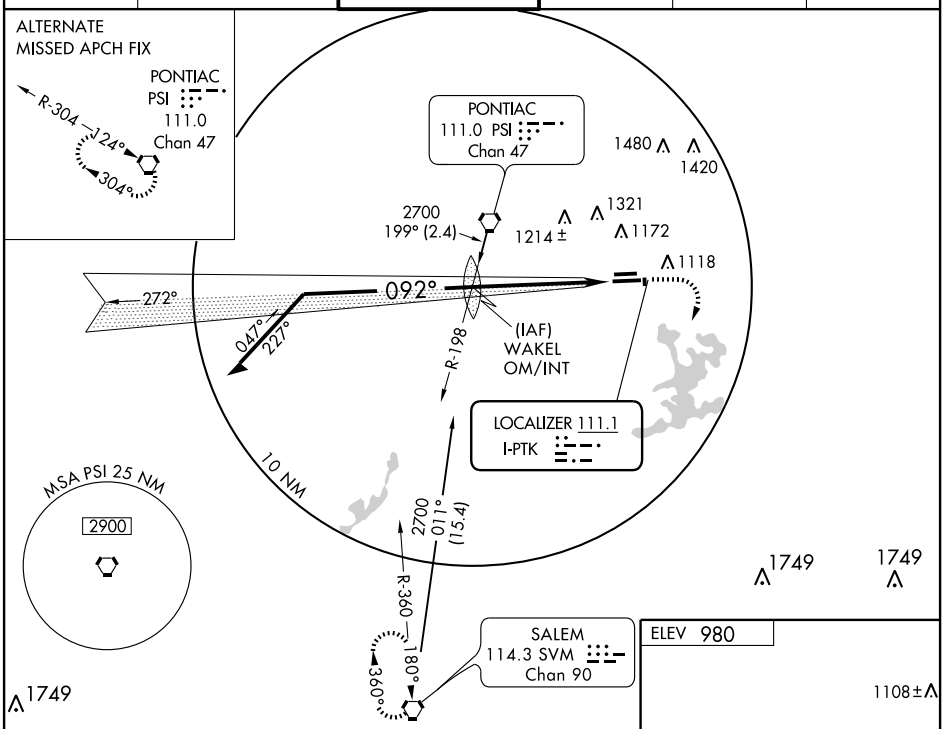

CATEGORY	A	B	C	D
S-ILS 9R	*1180/24		200 (200-½)	
S-LOC 9R	1620/24	640 (700-½)	1620/60 640 (700-1¼)	1620-1½ 640 (700-1½)
CIRCLING	1620-1	640 (700-1)	1620-1¾ 640 (700-1¾)	1640-2 660 (700-2)

HIRL Rwy 9R-27L L
MIRL Rwy 9L-27R
REIL Rwys 9L, 27L and 27R L

FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

EC-1, 22 OCT 2009 to 19 NOV 2009
EC-1, 22 OCT 2009 to 19 NOV 2009