LOC I-INL	APP CRS	Rwy Idg	7400
111.95	313°	TDZE	1166
		Apt Elev	1185

COPTER ILS or LOC RWY 31

INTERNATIONAL FALLS/FALLS INTL (INL)

Inoperative table does not apply.
When local altimeter setting not received, use Baudette altimeter setting and increase DA 127 feet and ILS visibility ⅜ mile, increase all MDAs 140 feet.

MALSR

MISSED APPROACH: Climb to 2500 then climbing left turn to 3400 direct RAIZE LOM and hold.

ASOS	MINNEAPOLIS CENTER	UNICOM
120.0	120.9 377.1	122.8 (CTAF) L

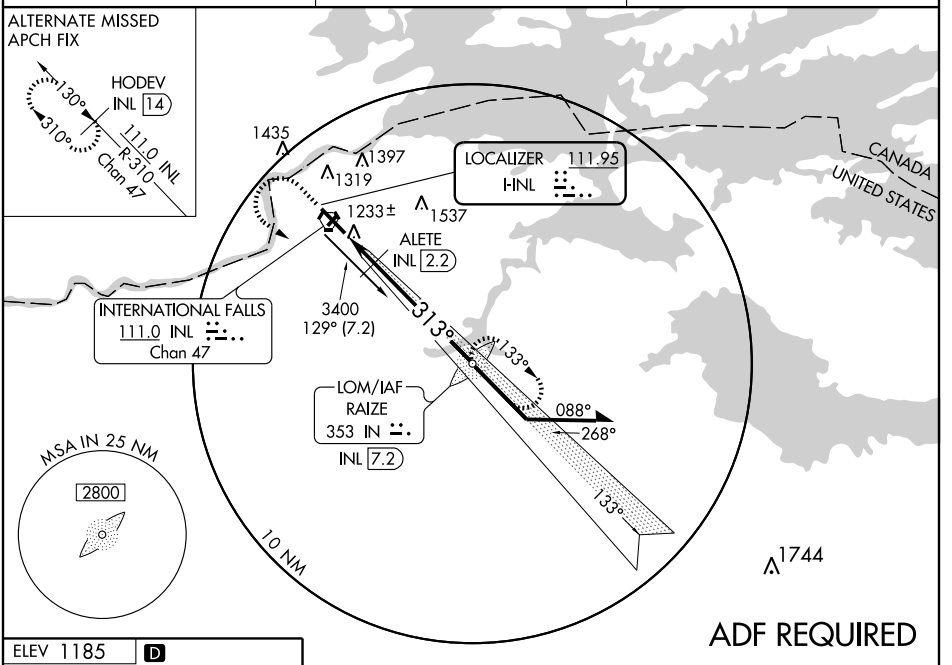

ELEV 1185 D

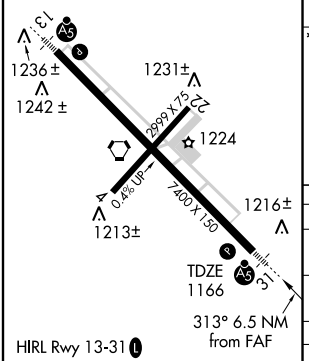

FAF to MAP 6.5 NM					
Knots	45	60	75	90	105
Min:Sec	8:40	6:30	5:12	4:20	3:43

2500	3400	IN
		353

*1760 when using Baudette altimeter setting.

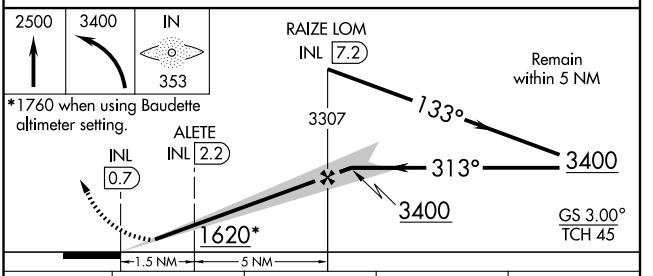

CATEGORY	COPTER	B	C	D
H-ILS 31	1366-⅜ 200 (200-⅜)	NA		
H-LOC 31	1620-½ 454 (500-½)	NA		
CIRCLING	NA			
ALETE FIX MINIMUMS				
H-LOC 31	1520-½ 354 (400-½)	NA		
CIRCLING	NA			

NC-1, 22 OCT 2009 to 19 NOV 2009
NC-1, 22 OCT 2009 to 19 NOV 2009