ILS or LOC RWY 9

CHICAGO/AURORA MUNI (ARR)

LOC I-ARR	APP CRS	Rwy Idg	6501
108.9	090°	TDZE	706
		Apt Elev	712

If local altimeter setting not received, use Chicago O'Hare Intl altimeter setting and increase all DA/MDAs 80 feet.

MALSR

MISSED APPROACH: Climb to 1200, then climbing right turn to 3000 via heading 120° and ORD R-235 to VAINS Int/25 DME and hold, continue climb-in-hold to 3000.

ATIS	CHICAGO APP CON	AURORA TOWER ★	GND CON	CLNC DEL	UNICOM
125.85	133.5 349.0	120.6 (CTAF) L	121.7	121.7 (When tower closed)	122.95 123.5

RADAR REQUIRED

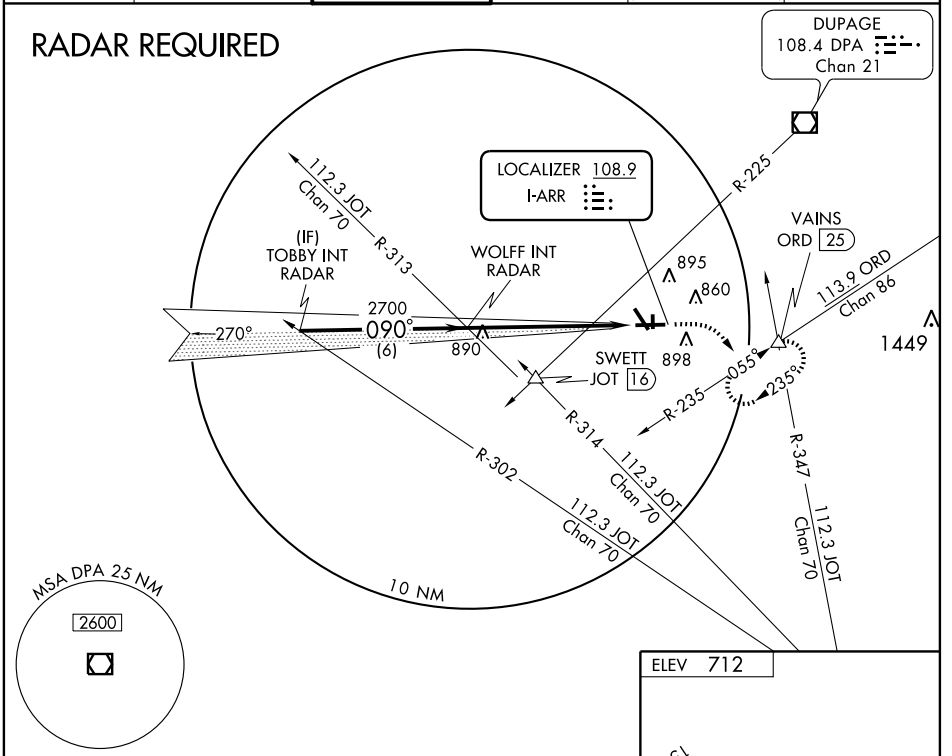

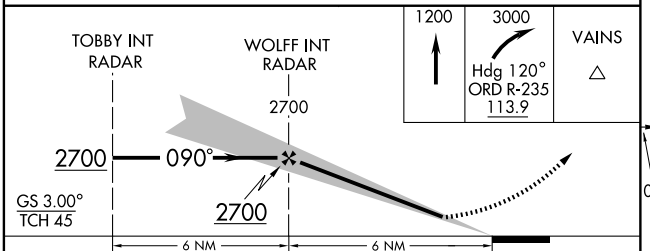



CATEGORY	A	B	C	D
S-ILS 9	906-½ 200 (200-½)			
S-LOC 9	1160-½ 454 (500-½)		1160-¾ 454 (500-¾)	1160-1 454 (500-1)
CIRCLING	1200-1 488 (500-1)		1200-1½ 488 (500-1½)	1280-2 568 (600-2)

MIRL Rwys 18-36 L
HIRL Rwys 15-33 and 9-27 L
REIL Rwys 15, 18, 27, 33 and 36 L

FAF to MAP 6 NM

Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

EC-3, 22 OCT 2009 to 19 NOV 2009

EC-3, 22 OCT 2009 to 19 NOV 2009