

RNAV (GPS) RWY 20R





CHICAGO/DUPAGE (DPA)

APP CRS 195°	Rwy ldg 7571
	TDZE 758
	Apt Elev 758

▼ When local altimeter setting not received, use Aurora altimeter setting and increase all MDAs 40 feet and LNAV Cat D visibility ¼ mile.
▲ VDP NA using Aurora altimeter setting. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 2500 direct FABUG then via 187° track to JOT VORTAC and hold.

ATIS 124.8	CHICAGO APP CON 133.5 349.0	DUPAGE TOWER 120.9 257.8	GND CON 121.8	CLNC DEL 119.75
----------------------	---------------------------------------	------------------------------------	-------------------------	---------------------------

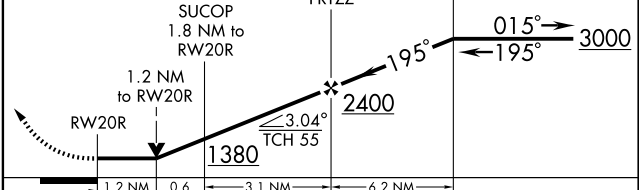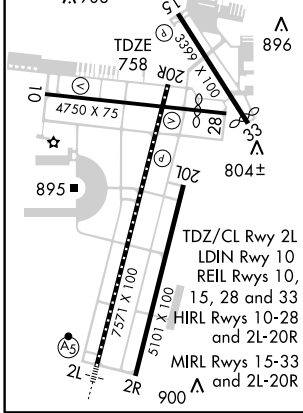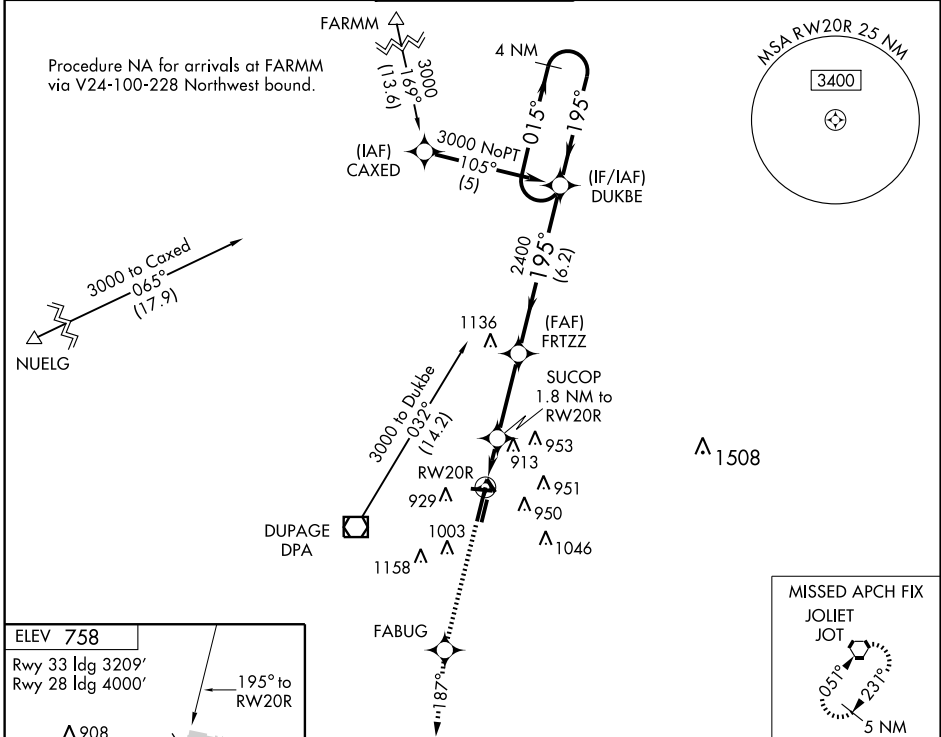

CATEGORY	A	B	C	D
LNAV MDA	1180-1	422 (500-1)	1180-1¼	422 (500-1¼)
CIRCLING	1260-1	502 (600-1)	1360-1¾ 602 (700-1¾)	1360-2 602 (700-2)

EC-3, 22 OCT 2009 to 19 NOV 2009

EC-3, 22 OCT 2009 to 19 NOV 2009