WAAS CH 70511 W09A	APP CRS 094°	Rwy Idg 6498 TDZE 609 Apt Elev 609

RNAV (GPS) RWY 9

ESCANABA / DELTA COUNTY (ESC)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Sawyer Intl altimeter setting and increase LPV DA to 987, LNAV/VNAV DA to 1145, increase all MDA 180 feet, increase LPV visibility all Cats ¼ mile, LNAV/VNAV visibility all Cats ½ mile, increase LNAV Cat C visibility ½ mile, LNAV Cat D visibility ¼ mile, increase Circling Cat C visibility ¾ mile, and Circling Cat D visibility ½ mile. For inoperative MALSR, increase LNAV Cat D visibility to 1¼. For inoperative MALSR, when using Sawyer Intl altimeter setting, increase LPV all Cats visibility to 1¼. VDP NA when using Sawyer Intl altimeter setting. Baro-VNAV NA when using Sawyer Intl altimeter setting.

MALSR

MISSED APPROACH: Climb to 2500 direct ZUMAB and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
121.425	127.65	122.8 (CTAF) L

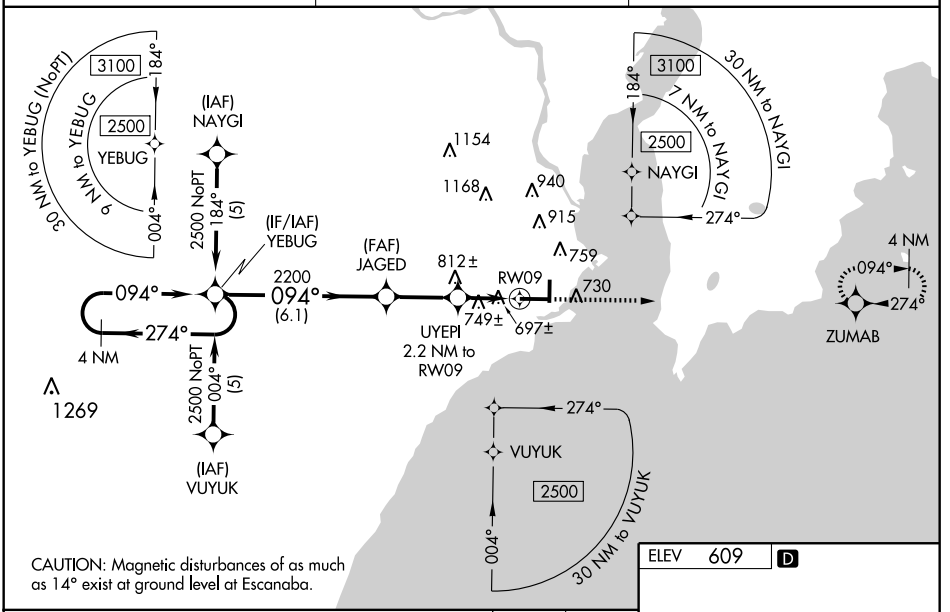

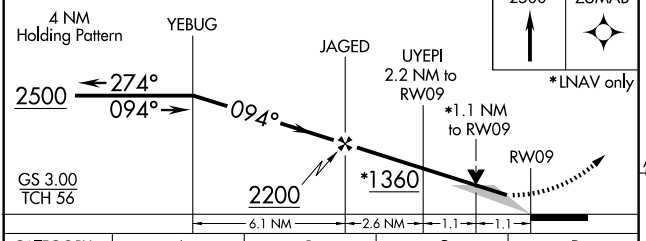

CATEGORY	A	B	C	D
LPV DA	809-½	200 (200-½)		
LNAV/VNAV DA	967-¾	358 (400-¾)		
LNAV MDA	1000-½	391 (400-½)		1000-1 391 (400-1)
CIRCLING	1060-1	451 (500-1)	1240-1¾ 631 (700-1¾)	1280-2¼ 671 (700-1¼)



HIRL Rwy 9-27 L
MIRL Rwy 18-36 L
REIL Rwy 36 L

EC-1, 22 OCT 2009 to 19 NOV 2009
EC-1, 22 OCT 2009 to 19 NOV 2009