WAAS	APP CRS	Rwy Idg	8500
CH 72911	158°	TDZE	312
W16A		Apt Elev	346

RNAV (GPS) RWY 16L

JACKSON-EVERS INTL (JAN)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hawkins Field altimeter setting and increase all DA 19 feet and all MDA 20 feet. VDP and Baro-VNAV NA when using Hawkins Field altimeter setting.

ASR

ALSF-2

MISSED APPROACH: Climb to 3000 direct MASPY and hold.

ATIS	JACKSON APP CON★	JACKSON TOWER★	GND CON		UNICOM
121.05	123.9 317.7	120.9 (CTAF) L 352.0	121.7 348.6	120.7 L*	122.95

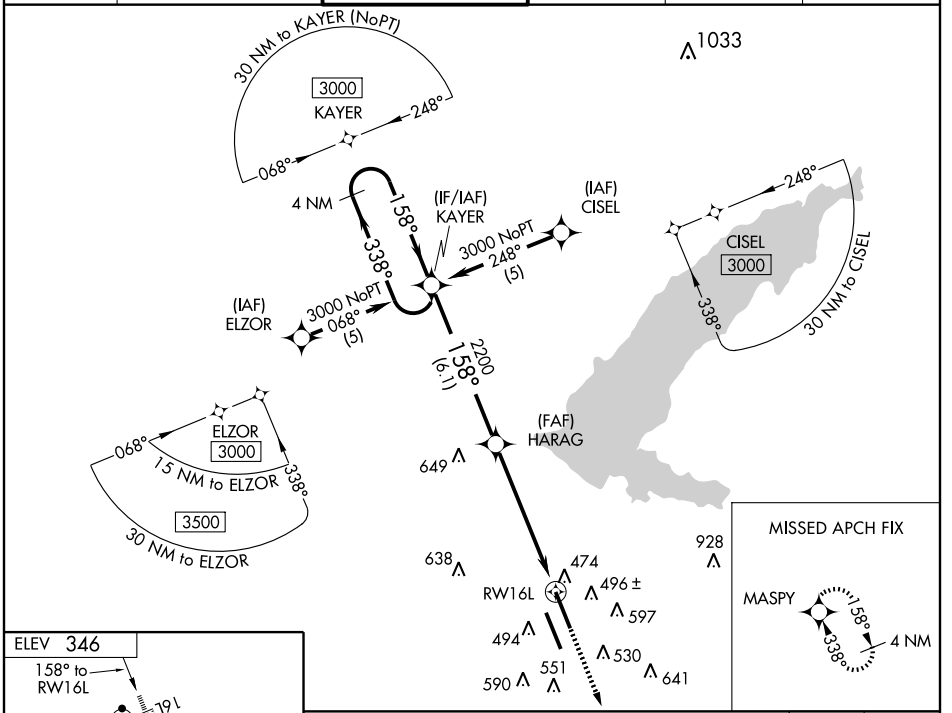

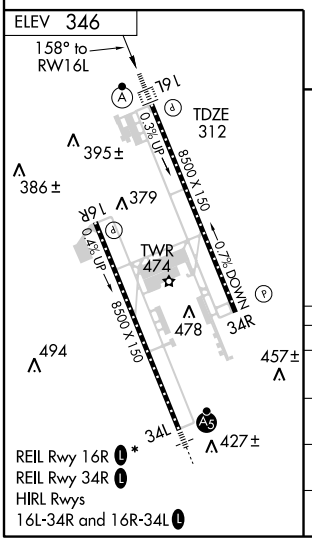

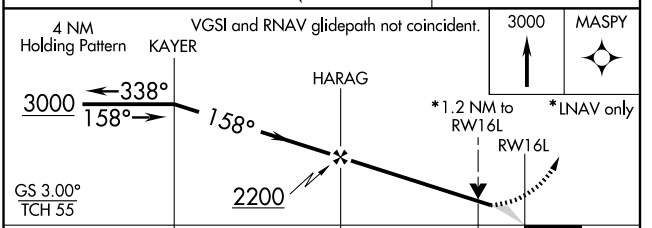

CATEGORY	A	B	C	D
LPV DA	512/24 200 (200-½)			
LNAV/VNAV DA	724/50 412 (400-1)			
LNAV MDA	760/24 448 (500-½)		760/40 448 (500-¾)	760/50 448 (500-1)
CIRCLING	840-1 494 (500-1)	880-1 534 (600-1)	880-1½ 534 (600-1½)	900-2 554 (600-2)

SC-4, 22 OCT 2009 to 19 NOV 2009
SC-4, 22 OCT 2009 to 19 NOV 2009