WAAS CH 49211 W16B	APP CRS 158°	Rwy Idg 8500 TDZE 319 Apt Elev 346

RNAV (GPS) RWY 16R

JACKSON-EVERS INTL (JAN)

ASR — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Hawkins Field altimeter setting and increase all DA 19 feet and all MDA 20 feet, increase LNAV/VNAV all Cats visibility ¼ mile. VDP and Baro-VNAV NA when using Hawkins Field altimeter setting.

MISSED APPROACH: Climb to 3000 direct FAVIN and hold.

ATIS	JACKSON APP CON ★	JACKSON TOWER ★	GND CON		UNICOM
121.05	123.9 317.7	120.9 (CTAF) L 352.0	121.7 348.6	120.7 L *	122.95

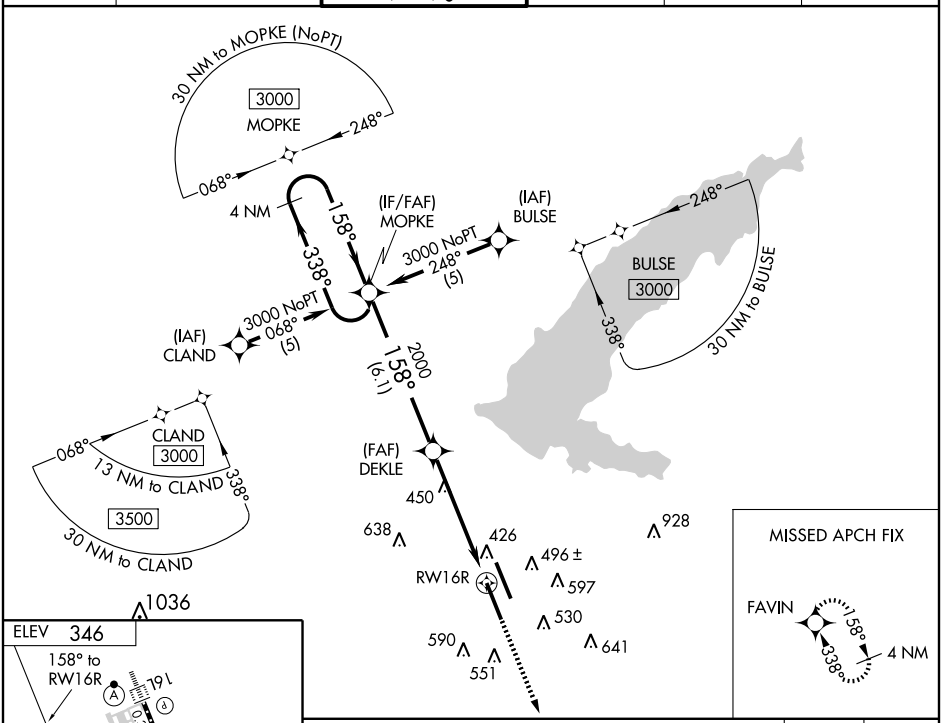

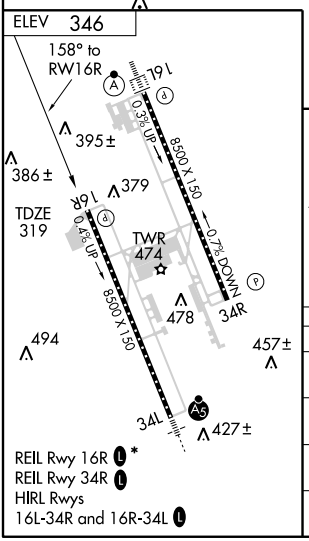

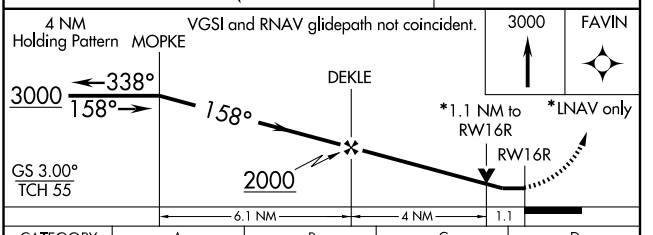

CATEGORY	A	B	C	D
LPV DA	656-1¼ 337 (400-1¼)			
LNAV/VNAV DA	758-1½ 439 (500-1½)			
LNAV MDA	720-1 401 (400-1)		720-1¼ 401 (400-1¼)	
CIRCLING	840-1 494 (500-1)	880-1 534 (600-1)	880-1½ 534 (600-1½)	900-2 554 (600-2)

SC-4, 22 OCT 2009 to 19 NOV 2009
SC-4, 22 OCT 2009 to 19 NOV 2009