RNAV (GPS) RWY 34L

JACKSON-EVERS INTL (JAN)

WAAS	APP CRS	Rwy Idg	8500
CH 61301	338°	TDZE	329
W34A		Apt Elev	346

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Hawkins Field altimeter setting. When local altimeter setting not received, use Hawkins Field altimeter setting and increase all DA 19 feet and all MDA 20 feet.

ASR

MALSR

MISSED APPROACH: Climb to 3000 direct MOPKE and hold.

ATIS	JACKSON APP CON ★	JACKSON TOWER ★	GND CON		UNICOM
121.05	123.9 317.7	120.9 (CTAF) L 352.0	121.7 348.6	120.7 L *	122.95

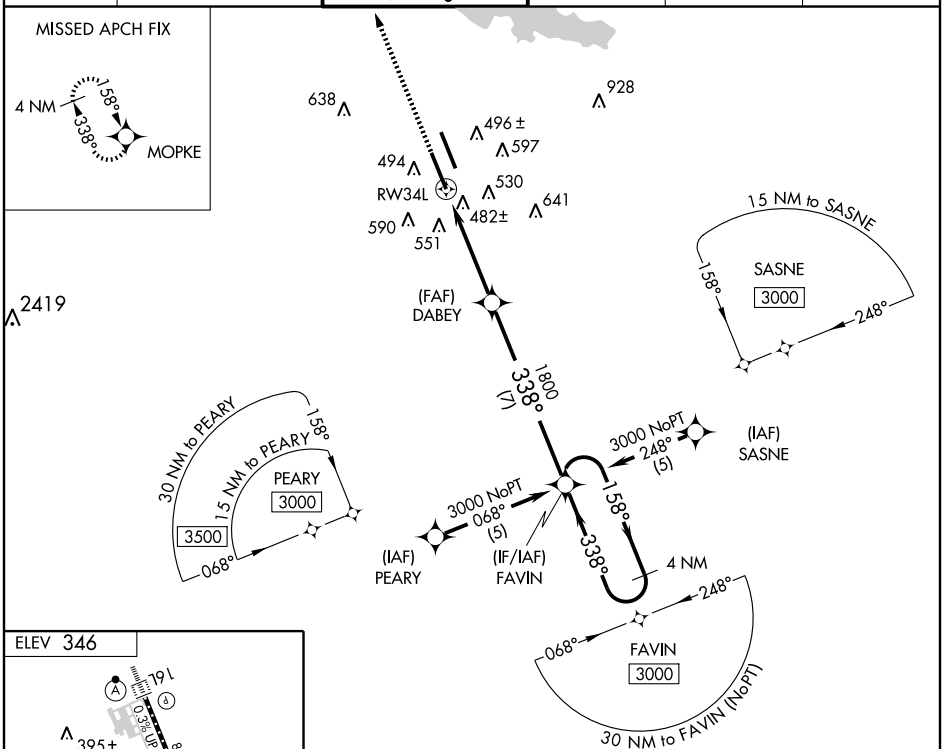

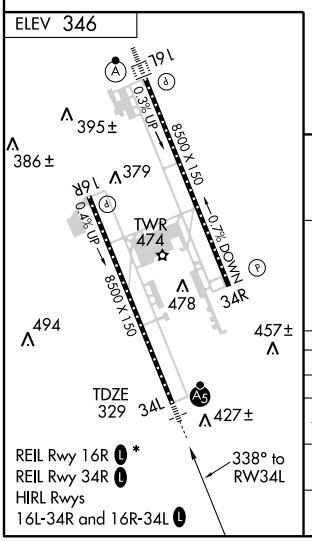

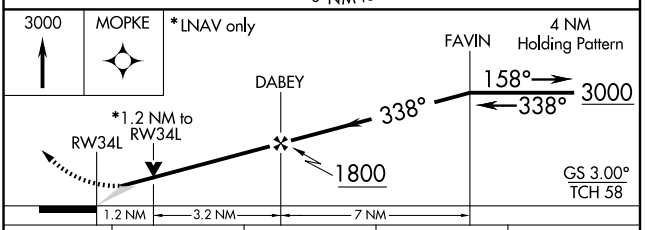

CATEGORY	A	B	C	D
LPV DA	529/24 200 (200-½)			
LNAV/VNAV DA	875-1½ 546 (600-1½)			
LNAV MDA	780/24 451 (500-½)		780/40 451 (500-¾)	780/50 451 (500-1)
CIRCLING	840-1 494 (500-1)	880-1 534 (600-1)	880-1½ 534 (600-1½)	900-2 554 (600-2)

SC-4, 22 OCT 2009 to 19 NOV 2009
SC-4, 22 OCT 2009 to 19 NOV 2009