

ILS or LOC RWY 17




GREENVILLE/ MAJORS (GVT)

LOC I-GVT 110.5	APP CRS 176°	Rwy Idg 8030
		TDZE 534
		Apt Elev 535

T When local altimeter setting not received, use Terrell altimeter setting and increase DA 64 feet and all MDA 80 feet and increase S-ILS 17 all Cats visibility 1/4 mile, S-LOC 17 Cat A, B, C and D visibility 1/4 mile, Cat E visibility 1/2 mile, and circling Cat C and E visibility 1/4 mile. Inoperative table does not apply to S-LOC 17 Cat C. ADF Required.

MALS
MISSED APPROACH: Climb to 1000 then climbing right turn to 2300 direct GV LOM and hold, continue climb-in-hold to 2300.

AWOS-3 133.425	FORT WORTH CENTER 132.85 360.75	MAJORS TOWER ★ 118.65 (CTAF) 0 385.425	GND CON 121.7 335.8	UNICOM 122.95
--------------------------	---	--	-------------------------------	-------------------------

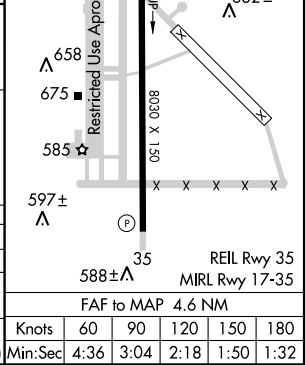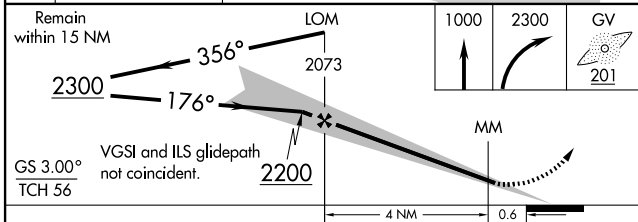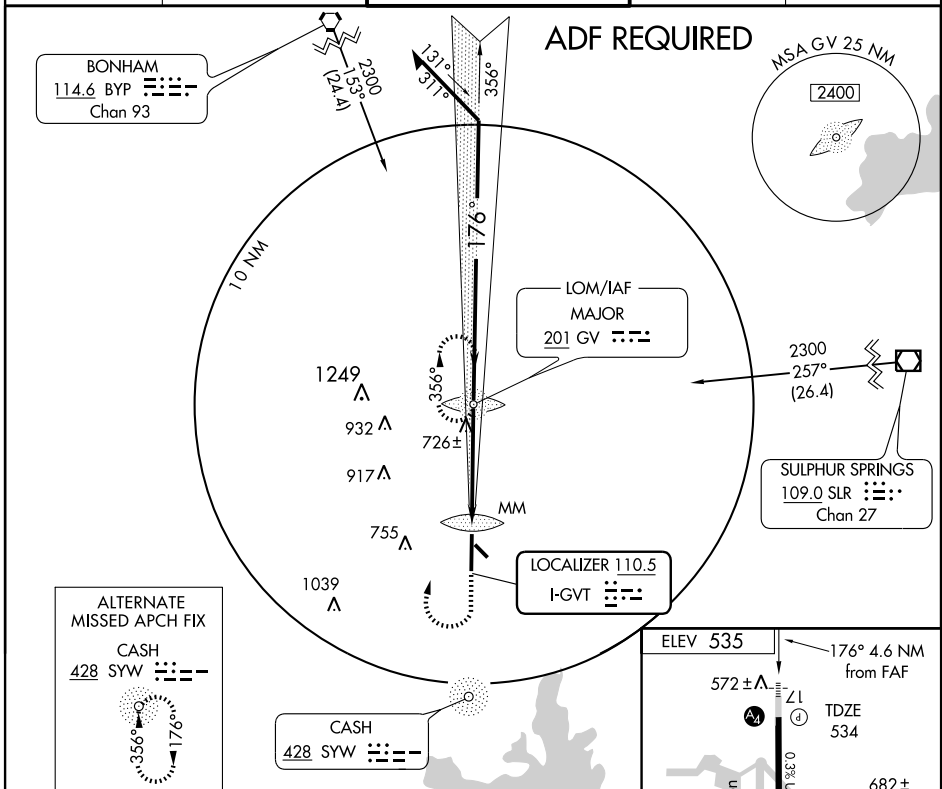

CATEGORY	A	B	C	D	E
S-ILS 17	734-3/4 200 (200-3/4)				
S-LOC 17	1060-3/4 526 (600-3/4)	1060-1 526 (600-1 1/2)	1060-1 1/2 525 (600-1 1/2)	1060-1 3/4 526 (600-1 3/4)	1280-2 3/4 745 (800-2 3/4)
CIRCLING	1060-1 525 (600-1)	1060-1 525 (600-1 1/2)	1100-2 565 (600-2)	1280-2 3/4 745 (800-2 3/4)	

Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

SC-2, 22 OCT 2009 to 19 NOV 2009

SC-2, 22 OCT 2009 to 19 NOV 2009