

RNAV (GPS) RWY 11


HAMILTON/BUTLER COUNTY RGNL (HAO)

WAAS CH 56600 W11A	APP CRS 115°	Rwy Idg TDZE Apt Elev	5500 632 633
--	------------------------	-----------------------------	---



▼ If local altimeter setting not received, use Cincinnati Muni Airport-Lunken Field altimeter setting and increase all DAs 59 feet and all MDAs 60 feet. Baro-VNAV NA when using Cincinnati Muni Airport-Lunken Field altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F).
▲ Visibility reduction by helicopters NA. DME/DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 3000 direct
BRNIE and hold.

ASOS 121.425	CINCINNATI APP CON 121.0 257.725	CLNC DEL 126.25	UNICOM 123.05 (CTAF)
------------------------	--	---------------------------	--------------------------------

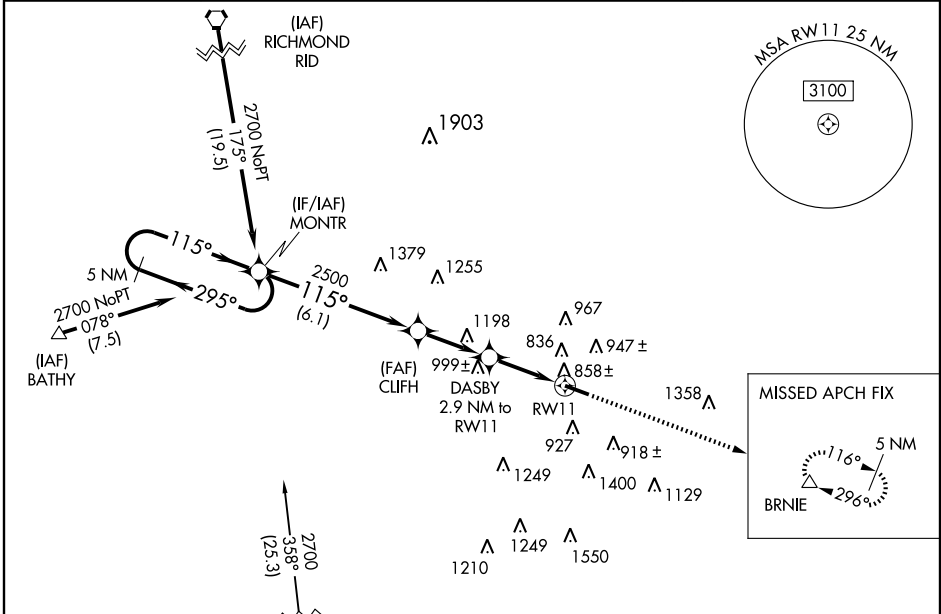

Procedure NA for arrivals on CVG VORTAC airway radials 010 CW 026.

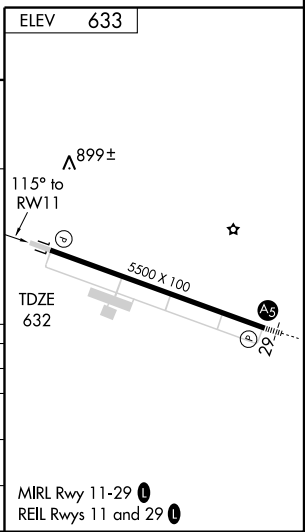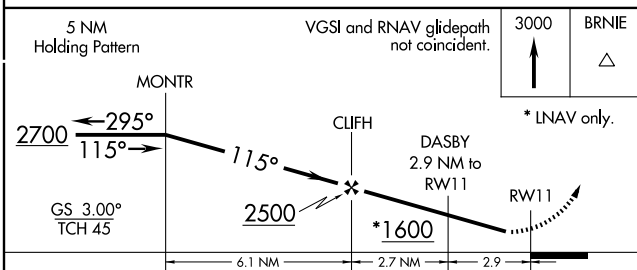

CATEGORY	A	B	C	D
LPV DA		998-1¼	366 (400-1¼)	
LNAV/VNAV DA		1108-1¾	476 (500-1¾)	
LNAV MDA	1160-1 528 (600-1)		1160-1½ 528 (600-1½)	1160-1¾ 528 (600-1¾)
CIRCLING	1200-1 567 (600-1)	1280-1 647 (700-1)	1300-1¾ 667 (700-1¾)	1320-2¼ 687 (700-2¼)

EC-2, 22 OCT 2009 to 19 NOV 2009

EC-2, 22 OCT 2009 to 19 NOV 2009