

WAAS CH 82613 W27A	APP CRS 276°	Rwy Idg TDZE Apt Elev	5001 753 755
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 27

MOUNT PLEASANT MUNI (MOP)

▽ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Alma altimeter setting and increase all DA 42 feet and all MDA 60 feet, increase LPV, LNAV/VNAV all Cats, LNAV Cat D and Circling Cat C visibilities ¼ mile. Baro-VNAV and VDP NA when using Alma altimeter setting.

MISSED APPROACH: Climb to 3000 direct COPTI and via 186° track direct INDAF and via 132° track to ELMME and hold.




AWOS-3 110.6	SAGINAW APP CON ★ 126.45 235.625	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

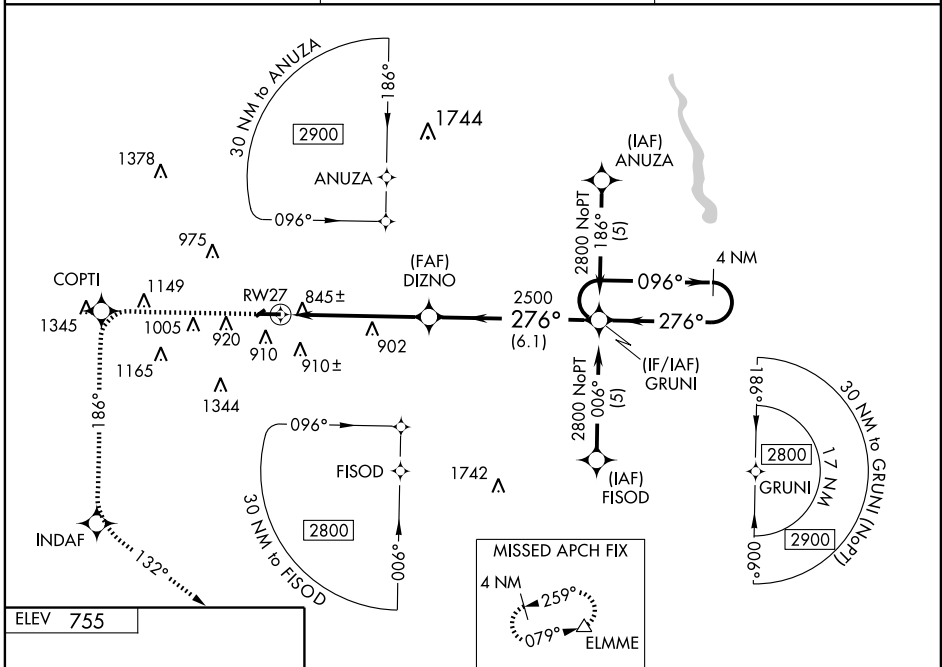

EC-1, 22 OCT 2009 to 19 NOV 2009

EC-1, 22 OCT 2009 to 19 NOV 2009

ELEV 755

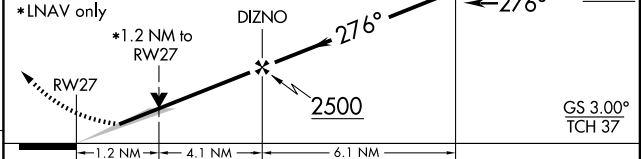

CATEGORY	A	B	C	D
LPV DA		1099-1¼	346 (400-1¼)	
LNAV/VNAV DA		1201-1½	448 (500-1½)	
LNAV MDA	1160-1	407 (500-1)	1160-1¼	407 (500-1¼)
CIRCLING	1220-1	465 (500-1)	1320-1½	1360-2
			565 (600-1½)	605 (700-2)

REIL Rwy 27 0
MIRL Rwy 9-27 0