


LOC/DME I-DLL 109.15	APP CRS 010°	Rwy Idg 4800
Chan 28 (Y)	TDZE 980	Apt Elev 980

LOC/DME RWY 1
BARABOO WISCONSIN DELLS (DLL)

NA If local altimeter setting not received, use Tri-County Rgnl altimeter setting and increase all MDAs 100 feet. VDP NA when using Tri-County Rgnl altimeter setting. Circling NA to Rwy 14-32.

MISSED APPROACH: Climb to 3000 then climbing right turn to 4000 direct DLL VORTAC and hold.

AWOS-3 118.325	MADISON APP CON * 135.45 343.7	UNICOM 123.05(CTAF) 0
--------------------------	--	---------------------------------


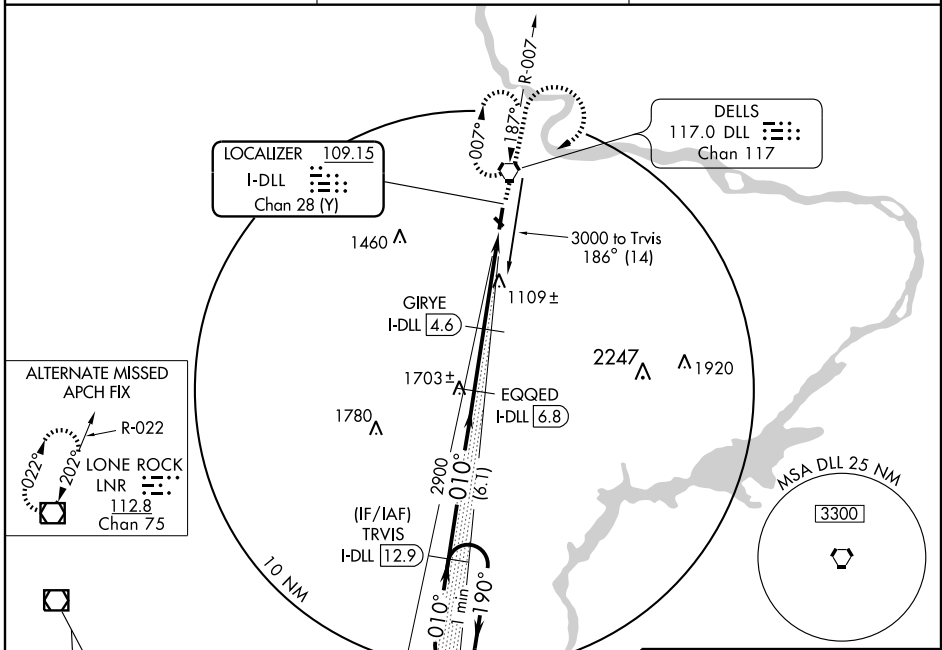


ALTERNATE MISSED APCH FIX

R-022
LONE ROCK LNR
112.8
Chan 75

LONE ROCK
112.8 LNR
Chan 75

ELEV 980
HIRL Rwy 1-19
REIL Rws 1 and 19

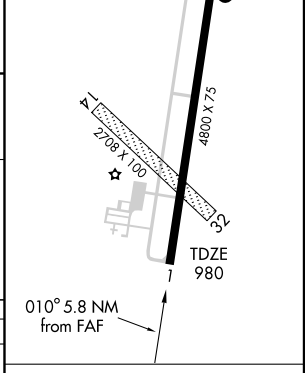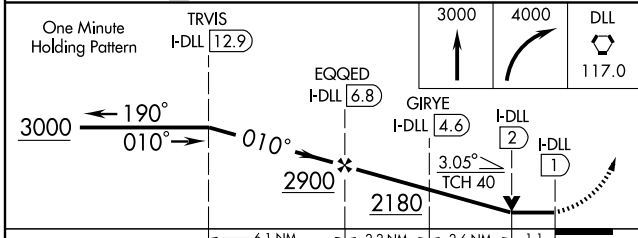

One Minute Holding Pattern	TRVIS I-DLL 12.9	3000	4000	DLL 117.0
	EQGED I-DLL 6.8	GIRYE I-DLL 4.6	I-DLL 2	I-DLL 1
			3.05° TCH 40	
CATEGORY	A	B	C	D
S-1	1360-1	380 (400-1)		NA
CIRCLING	1540-1	560 (600-1)	1560-1½ 580 (600-1½)	NA

Knots	60	90	120	150	180
Min:Sec					

EC-3, 22 OCT 2009 to 19 NOV 2009

EC-3, 22 OCT 2009 to 19 NOV 2009