| WAAS | APP CRS | Rwy Idg | 6000 |
|---|---|---|---|
| CH 86211 | 232° | TDZE | 723 |
| W23A | | Apt Elev | 727 |

# RNAV (GPS) RWY 23
## CHICAGO/WAUKEGAN RGNL (UGN)

DME/DME RNP-0.3 NA. Baro-VNAV NA below -16°C (4°F). Circling to Rwy 14/32 NA at night. For inoperative MALSR increase LPV visibility to ¾ all Cats., and increase LNAV/VNAV Cat. D visibility to 1.

MALSR

MISSED APPROACH: Climb to 2400 direct FOVOJ and hold.

| ATIS | CHICAGO APP CON | WAUKEGAN TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 132.4 | 120.55 290.2 | 120.05 (CTAF) L 380.15 | 121.65 | 122.95 |

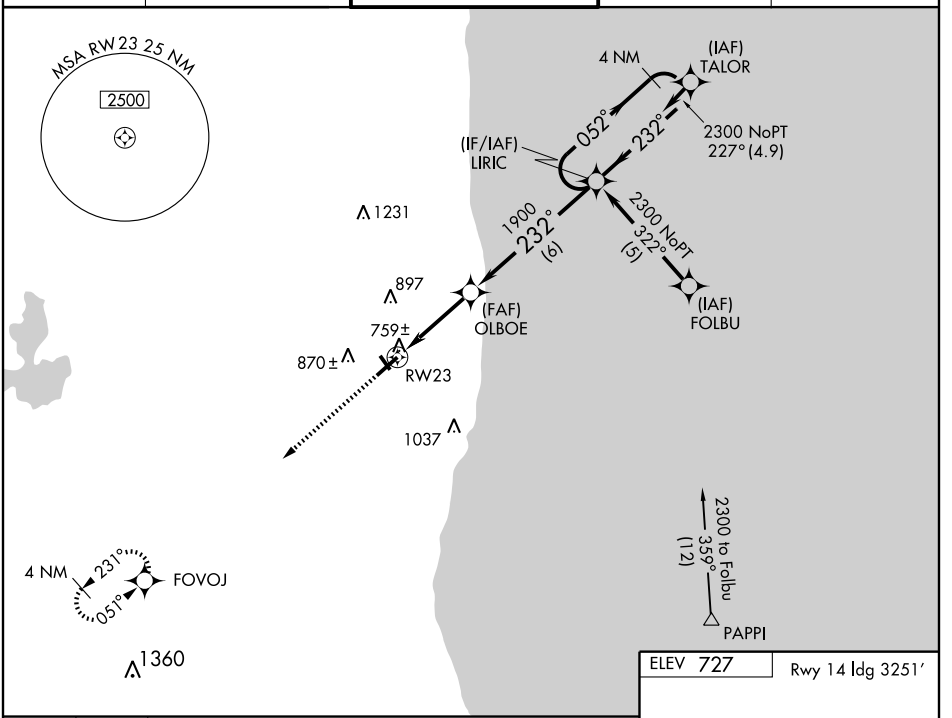


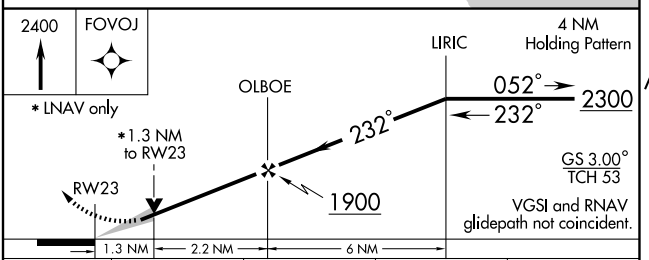


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 980-½ 257 (300-½) | | | |
| LNAV/VNAV DA | 1020-½ 297 (300-½) | | | 1020-¾ 297 (300-¾) |
| LNAV MDA | 1160-½ 437 (500-½) | | 1160-¾ 437 (500-¾) | 1160-1 437 (500-1) |
| CIRCLING | 1180-1 453 (500-1) | | 1180-1½ 453 (500-1½) | 1280-2 553 (600-2) |

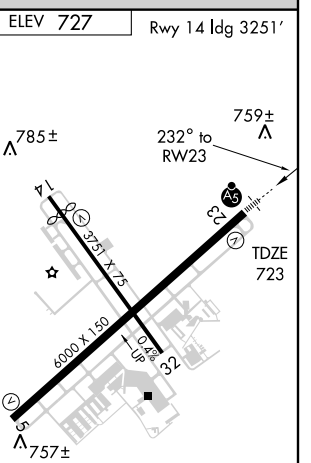




EC-3, 22 OCT 2009 to 19 NOV 2009
EC-3, 22 OCT 2009 to 19 NOV 2009