

WAAS CH 56400 W27A	APP CRS 273°	Rwy Idg TDZE Apt Elev	5002 8 8
--	------------------------	-----------------------------	-------------------------------------


RNAV (GPS) RWY 27L

MIAMI / KENDALL-TAMIAMI EXECUTIVE (TMB)

⚠ Circling to Rwy 13 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Miami Intl altimeter setting and increase all DA 27 feet and all MDA 40 feet, increase LNAV Cat D visibility ¼ mile, increase circling Cat D visibility ¼ mile. VDP and Baro-VNAV NA when using Miami Intl altimeter setting.


⚠ MISSED APPROACH: Climb to 2000 direct HAXAM and hold.

ATIS 124.0	MIAMI APP CON 125.5 354.1	TAMIAMI TOWER ★ 118.9 (CTAF) 0	GND CON 121.7	CLNC DEL 133.0
----------------------	-------------------------------------	--	-------------------------	--------------------------

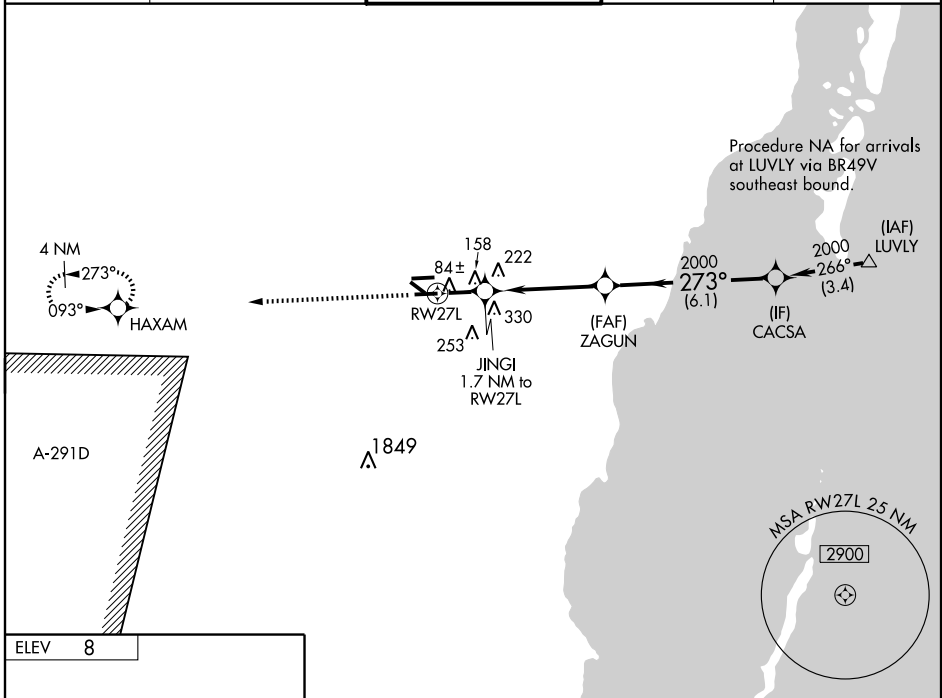

SE-3, 22 OCT 2009 to 19 NOV 2009

SE-3, 22 OCT 2009 to 19 NOV 2009

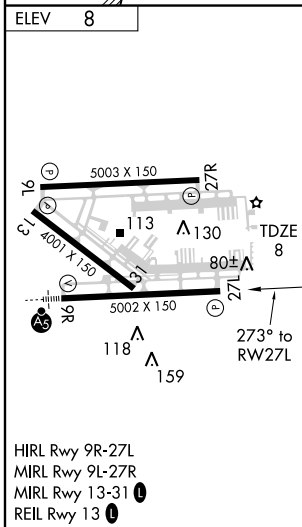

2000 HAXAM	Procedure Turn NA			
* LNAV only.	JINGI 1.7 NM to RW27L	ZAGUN	CACSA	2000
	*1.1 NM to RW27L	273°		GS 3.00° TCH 50
	1.1	0.6	4.3 NM	6.1 NM
CATEGORY	A	B	C	D
LPV DA		211-1	203 (300-1)	
LNAV/VNAV DA		441-1½	433 (500-1½)	
LNAV MDA	420-1	412 (500-1)	420-1¼	412 (500-1¼)
CIRCLING	460-1	452 (500-1)	460-1½ 452 (500-1½)	640-2 632 (700-2)