SANDUSKY TWO DEPARTURE

ATIS 125.25
CLEVELAND DEP CON
125.35 346.325

(NARRATIVE ON FOLLOWING PAGE)

TAKE-OFF MINIMUMS:
Rwy 6L: 400-2 or STANDARD with minimum climb of 400' per NM to 1800.
Rwy 6R: 400-2 or STANDARD with minimum climb of 360' per NM to 1800.
Rwy 24L: 300-1½ or STANDARD with minimum climb of 527' per NM to 1900.
Rwy 24R: 200-1 or STANDARD with minimum climb of 527' per NM to 1900.

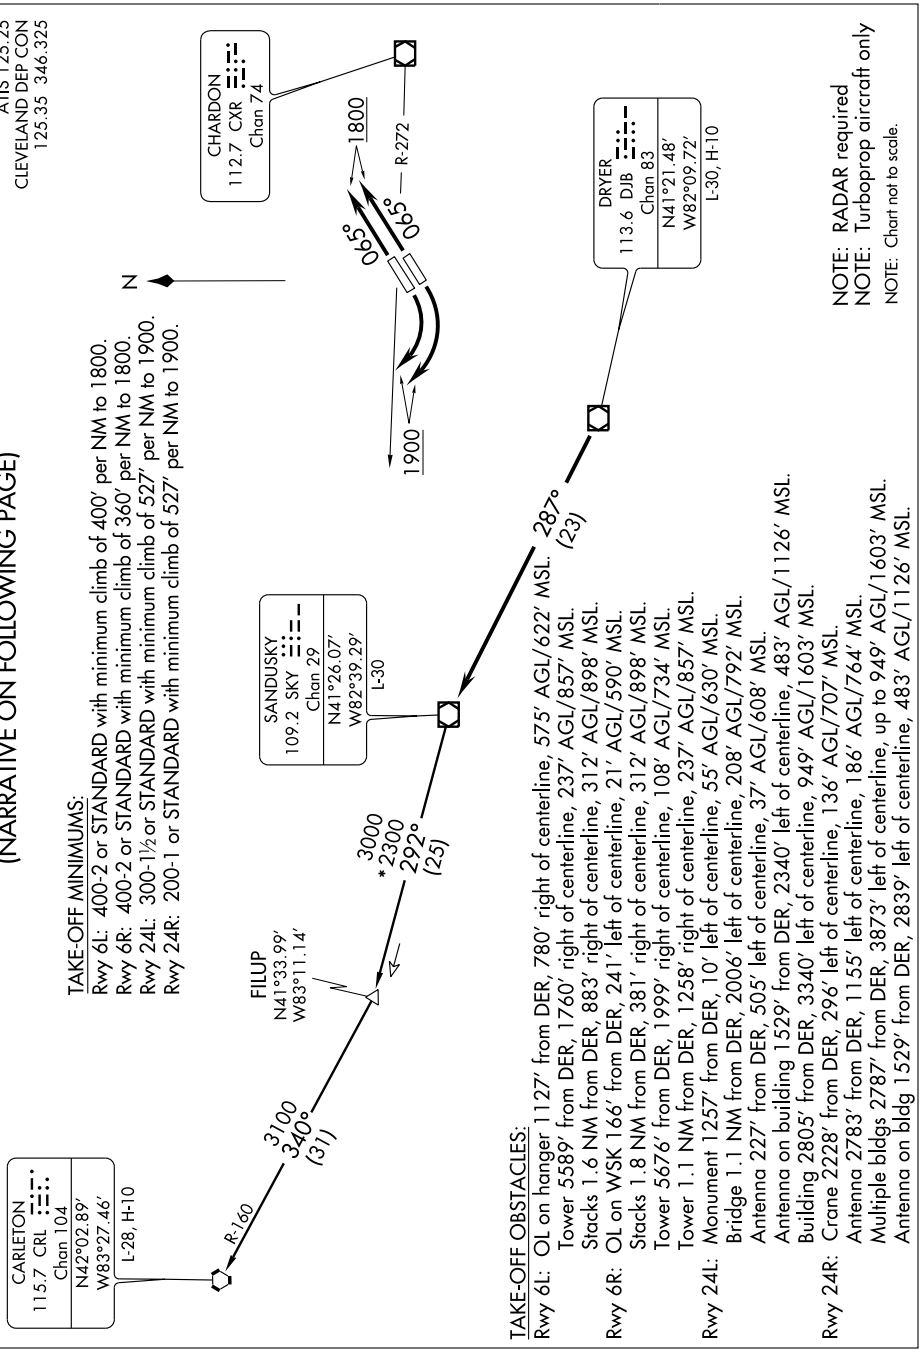

TAKE-OFF OBSTACLES:
Rwy 6L: OL on hanger 1127' from DER, 780' right of centerline, 575' AGL/622' MSL.
Tower 5589' from DER, 1760' right of centerline, 237' AGL/857' MSL.
Stacks 1.6 NM from DER, 883' right of centerline, 312' AGL/898' MSL.
Rwy 6R: OL on WSK 166' from DER, 241' left of centerline, 21' AGL/590' MSL.
Stacks 1.8 NM from DER, 381' right of centerline, 312' AGL/898' MSL.
Tower 5676' from DER, 1999' right of centerline, 108' AGL/734' MSL.
Tower 1.1 NM from DER, 1258' right of centerline, 237' AGL/857' MSL.
Rwy 24L: Monument 1257' from DER, 10' left of centerline, 55' AGL/630' MSL.
Bridge 1.1 NM from DER, 2006' left of centerline, 208' AGL/792' MSL.
Antenna 227' from DER, 505' left of centerline, 37' AGL/608' MSL.
Antenna on building 1529' from DER, 2340' left of centerline, 483' AGL/1126' MSL.
Building 2805' from DER, 3340' left of centerline, 949' AGL/1603' MSL.
Rwy 24R: Crane 2228' from DER, 296' left of centerline, 136' AGL/707' MSL.
Antenna 2783' from DER, 1155' left of centerline, 186' AGL/764' MSL.
Multiple bldgs 2787' from DER, 3873' left of centerline, up to 949' AGL/1603' MSL.
Antenna on bldg 1529' from DER, 2839' left of centerline, 483' AGL/1126' MSL.

NOTE: RADAR required
NOTE: Turboprop aircraft only
NOTE: Chart not to scale.

EC-2, 22 OCT 2009 to 19 NOV 2009

SANDUSKY TWO DEPARTURE
CLEVELAND, OHIO
CLEVELAND/BURKE LAKEFRONT (BKL)
(SKY2.SKY) 09183