

WAAS CH 40302 W35A	APP CRS 355°	Rwy Idg TDZE Apt Elev	4488 70 70
----------------------------------------	------------------------	-----------------------------	---------------------------------------




RNAV (GPS) RWY 35

MIDDLETOWN / SUMMIT (E V Y)

▼ Circling to Rwy 11, 29, 17 NA at night. If local altimeter setting not received, use Wilmington altimeter setting and increase all DAs/MDAs 40 feet. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (119°F). Baro-VNAV NA when using Wilmington altimeter setting. Visibility reduction by helicopters NA. DME/DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 2000 direct EPKAW and hold.

AWOS-3 132.325	PHILADELPHIA APP CON 118.35 323.1	CLNC DEL 125.3	UNICOM 122.725 (CTAF)	123.5 0
--------------------------	---------------------------------------------	--------------------------	---------------------------------	-----------------------

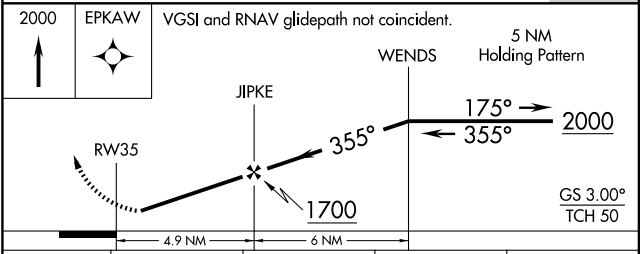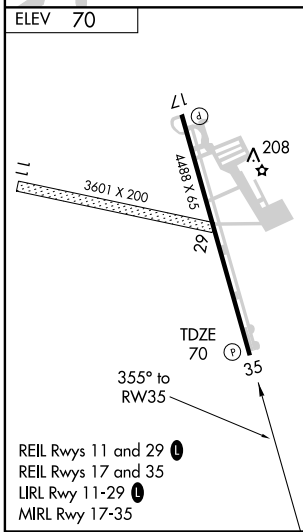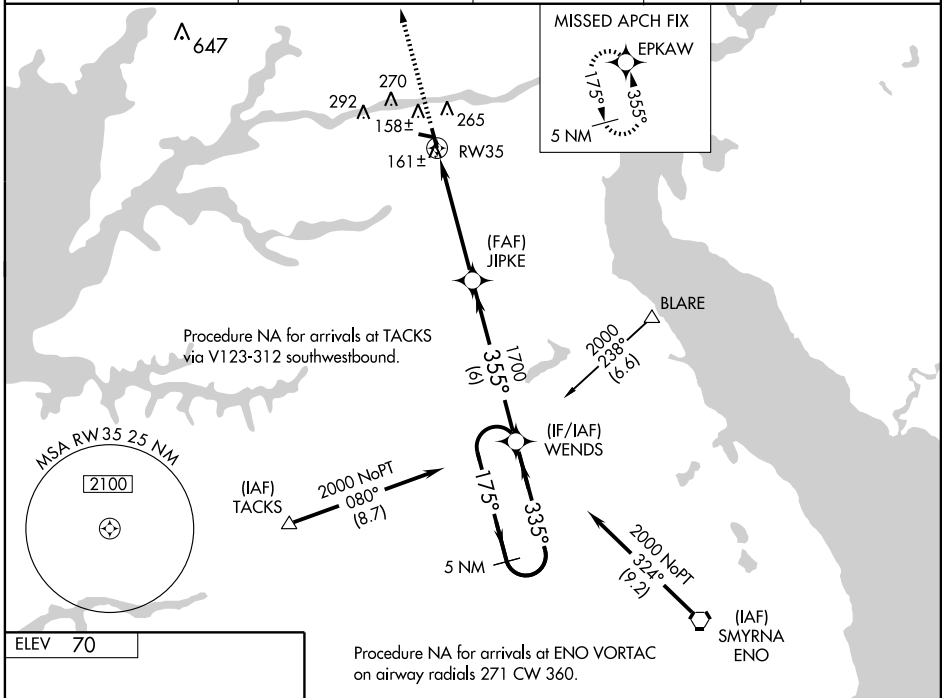

CATEGORY	A	B	C	D
LPV DA	356-1 286 (300-1)			
LNAV/VNAV DA	421-1 ¼ 351 (400-1 ¼)			
LNAV MDA	480-1 410 (500-1)	480-1 ¼ 410 (500-1 ¼)		
CIRCLING	660-1 590 (600-1)	660-1 ½ 590 (600-1 ½)		660-2 590 (600-2)

NE-3, 22 OCT 2009 to 19 NOV 2009

NE-3, 22 OCT 2009 to 19 NOV 2009