RNAV (GPS) RWY 33

LAWRENCE MUNI (LWC)

WAAS	APP CRS	Rwy Idg	5700
CH 57913	330°	TDZE	831
W33A		Apt Elev	833

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME NP-0.3 NA. When local altimeter setting not received, use Philip Billard Muni altimeter setting and increase all DA 52 feet and all MDA 60 feet and all LNAV/VNAV and LNAV Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Philip Billard Muni altimeter setting.

MALSR

MISSED APPROACH: Climb to 2700 direct RIBCO and hold.

ASOS	KANSAS CITY CENTER	CLNC DEL	UNICOM
121.225	123.8 343.7	121.825	123.0 (CTAF)

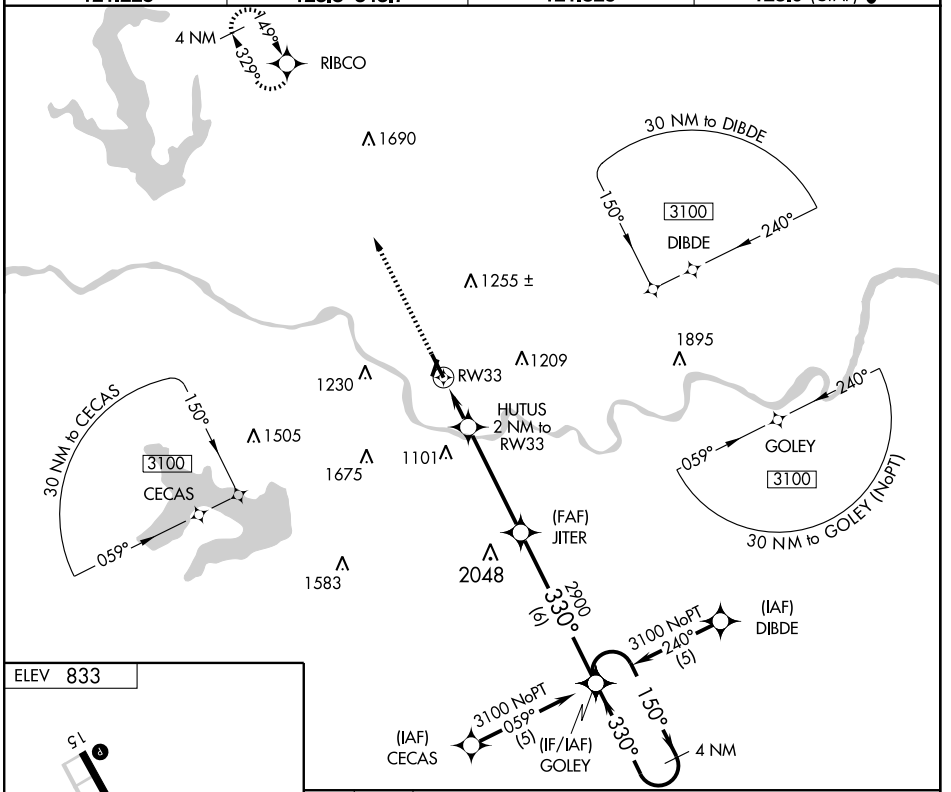

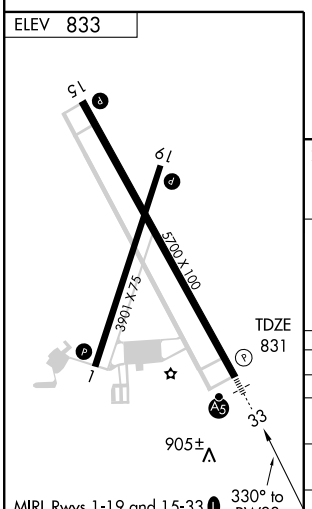

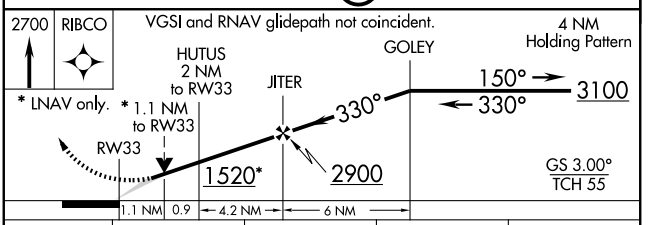

CATEGORY	A	B	C	D
LPV DA	1031-½	200 (200-½)		NA
LNAV/VNAV DA	1200-¾	369 (400-¾)		NA
LNAV MDA	1220-½	389 (400-½)		NA
CIRCLING	1420-1	587 (600-1)	1440-1¾ 607 (700-1¾)	NA

NC-2, 22 OCT 2009 to 19 NOV 2009
NC-2, 22 OCT 2009 to 19 NOV 2009