RNAV (GPS) RWY 19

SHELBYVILLE MUNI (GEZ)

WAAS	APP CRS	Rwy Idg	5000
CH 53603	189°	TDZE	803
W19A		Apt Elev	803

If local altimeter setting not received, use Indianapolis Intl altimeter setting and increase all DAs/MDAs 60 feet. Baro-VNAV NA when using Indianapolis Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). VDP NA when using Indianapolis Intl altimeter setting. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct WAGSE and hold.

ASOS	INDIANAPOLIS APP CON	UNICOM
121.55	127.15 317.8	122.8 (CTAF) L

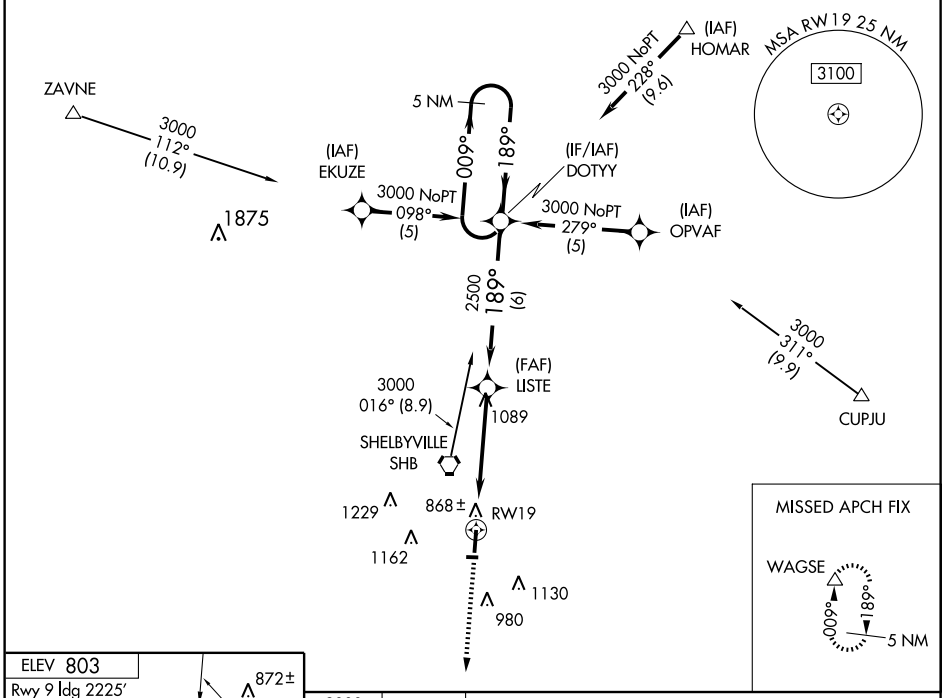

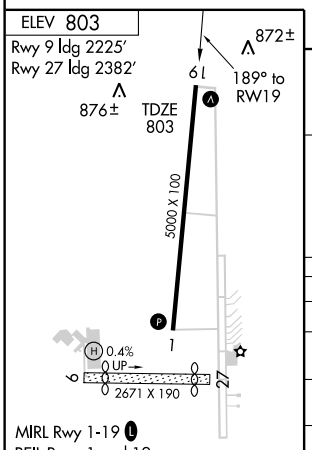

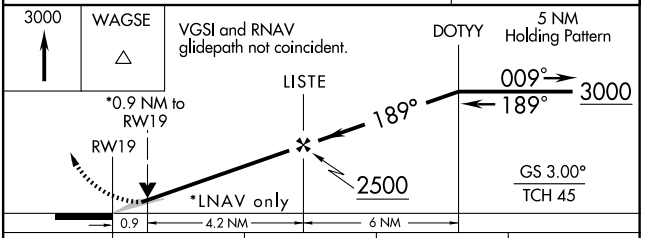

CATEGORY	A	B	C	D
LPV DA	1095-1 292 (300-1)			
LNAV/ VNAV DA	1142-1¼ 339 (400-1¼)			
LNAV MDA	1140-1 337 (400-1)			
CIRCLING	1200-1 397 (400-1)	1260-1 457 (500-1)	1260-1½ 457 (500-1½)	1480-2¼ 677 (700-2¼)

EC-2, 22 OCT 2009 to 19 NOV 2009
EC-2, 22 OCT 2009 to 19 NOV 2009