

ILS RWY 7


JACKSONVILLE INTL (JAX)

LOC I-JAX 110.7	APP CRS 074°	Rwy ldg 10000 TDZE 30 Apt Elev 30
---------------------------	------------------------	--

ASR For inoperative ALSF, increase S-ILS visibility to RVR 4000 Cat. E and S-LOC visibility to RVR 6000 Cat. E. For inoperative TDZL or RCLS, increase S-ILS visibility to RVR 2400 Cat. E. For inoperative RVR increase S-ILS visibility to 1/2 mile.



ALSF-2 MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 via heading 250° and CRG R-290 to MONIA CRG 29.2 DME/RADAR and hold.

ATIS 125.85	JACKSONVILLE APP CON 119.0 335.6	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6	CLNC DEL 119.5 290.275
-----------------------	--	--	-------------------------------	----------------------------------

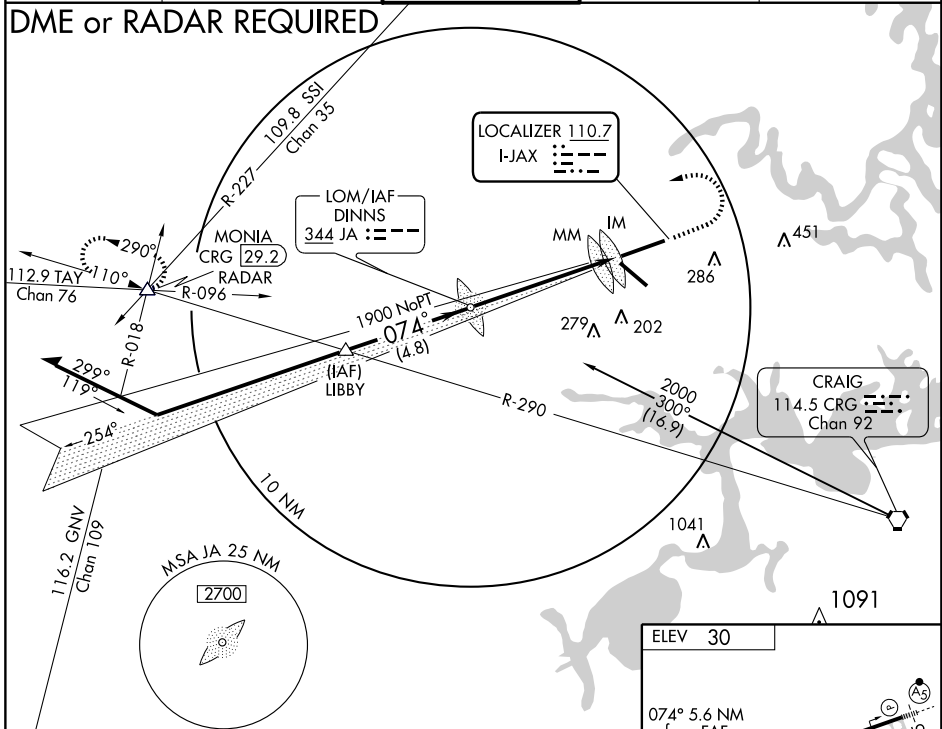

SE-3, 22 OCT 2009 to 19 NOV 2009

SE-3, 22 OCT 2009 to 19 NOV 2009

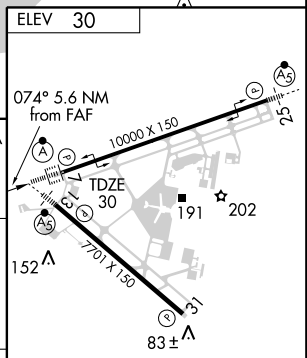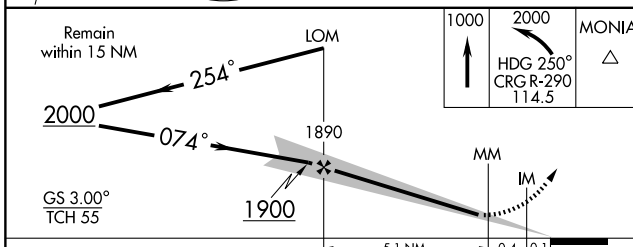

CATEGORY	A	B	C	D	E
S-ILS 7	230/18 200 (200-1/2)				
S-LOC 7	380/24	350 (400-1/2)	380/40 350 (400-3/4)		
CIRCLING	520-1 490 (500-1)	520-1 1/2 490 (500-1 1/2)	640-2 610 (700-2)	820-2 3/4 790 (800-2 3/4)	

REIL Rwy 31
TDZ/CL Rws 7, 25, and 13
HIRL Rws 7-25 and 13-31

FAF to MAP 5.6 NM

Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52