WAAS	APP CRS	Rwy Idg	5409
CH 99512	140°	TDZE	242
W14A		Apt Elev	245

RNAV (GPS) RWY 14

HOUSTON/LONE STAR EXECUTIVE (CXO)

T Circling to Rwy 19 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA.
A When local altimeter setting not received, use David Wayne Hooks Memorial altimeter setting and increase all DA 57 feet, and all MDA 60 feet. Increase LNAV/VNAV visibility all Cats ¼ mile, increase LNAV Cat C/D visibility ¼ mile.
VDP and Baro-VNAV NA when using David Wayne Hooks Memorial altimeter setting.
For inoperative MALSR when using David Wayne Hooks Memorial altimeter setting; increase LPV all Cats visibilty to 1 mile.

MALSR

MISSED APPROACH: Climb to 3000 direct EFMEW and via track 092° to CLEEP and hold.

ATIS	HOUSTON APP CON ★	LONE STAR TOWER ★	GND CON	CLNC DEL	HOUSTON CLNC DEL	UNICOM
118.325	119.7 281.4	124.125 (CTAF) L	120.45	120.45	119.55 (When tower closed)	122.95

RADAR REQUIRED

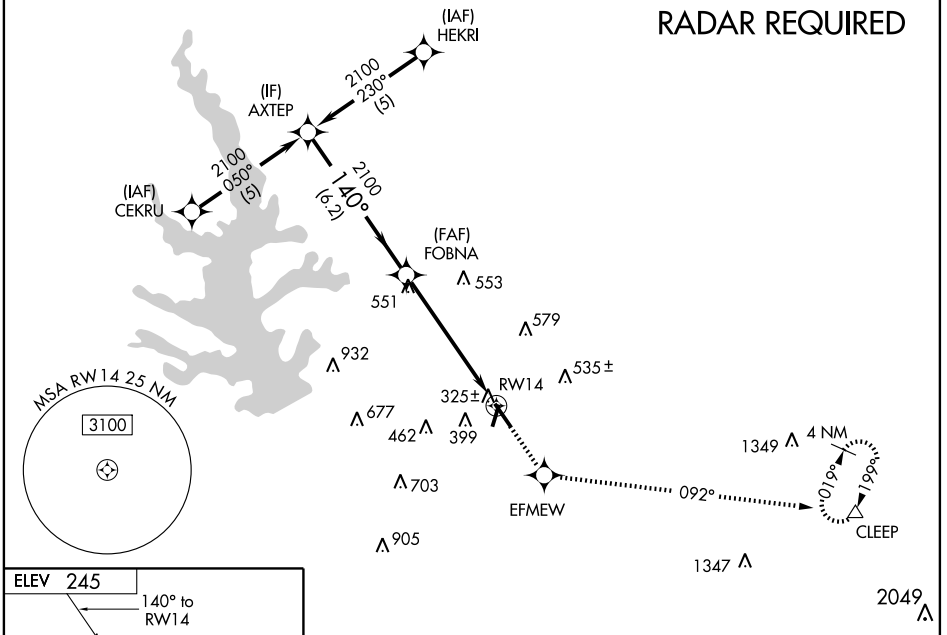

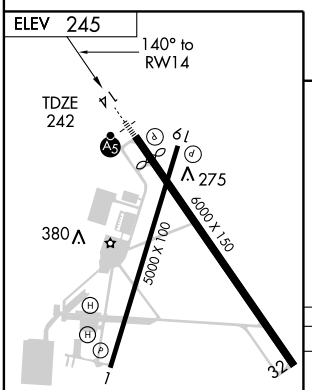

REIL Rwy 32 L
MIRL Rwy 1-19
MIRL Rwy 14-32 L

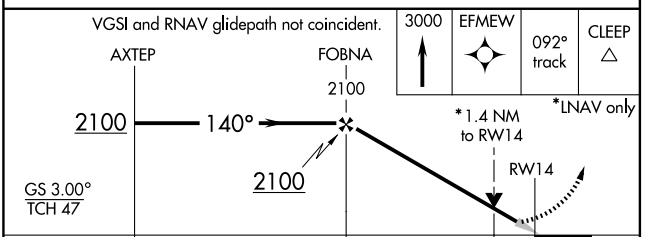

CATEGORY	A	B	C	D
LPV DA	442-½ 200 (200-½)			
LNAV/VNAV DA	604-¾ 362 (400-¾)			
LNAV MDA	720-½ 478 (500-½)		720-¾ 478 (500-¾)	720-1 478 (500-1)
CIRCLING	720-1 475 (500-1)		720-1½ 475 (500-1½)	800-2 555 (600-2)

SC-5, 22 OCT 2009 to 19 NOV 2009

SC-5, 22 OCT 2009 to 19 NOV 2009