WAAS	APP CRS	Rwy Idg	5501
CH 93914	352°	TDZE	1423
W35A		Apt Elev	1433

RNAV (GPS) RWY 35

ALTUS/QUARTZ MOUNTAIN RGNL (AXS)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above
A 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hobart altimeter setting and increase all DA 71 feet and all MDA 80 feet, increase LPV and LNAV/VNAV all Cats, LNAV Cat C and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Hobart altimeter setting.

MISSED APPROACH: Climb to 4000 direct KAYQA and via track 274° to CIVIG and left turn via track 182° to ADOBE and hold.

AWOS-3	ALTUS APP CON*	UNICOM
118.825	125.1 259.3	122.8 (CTAF) L

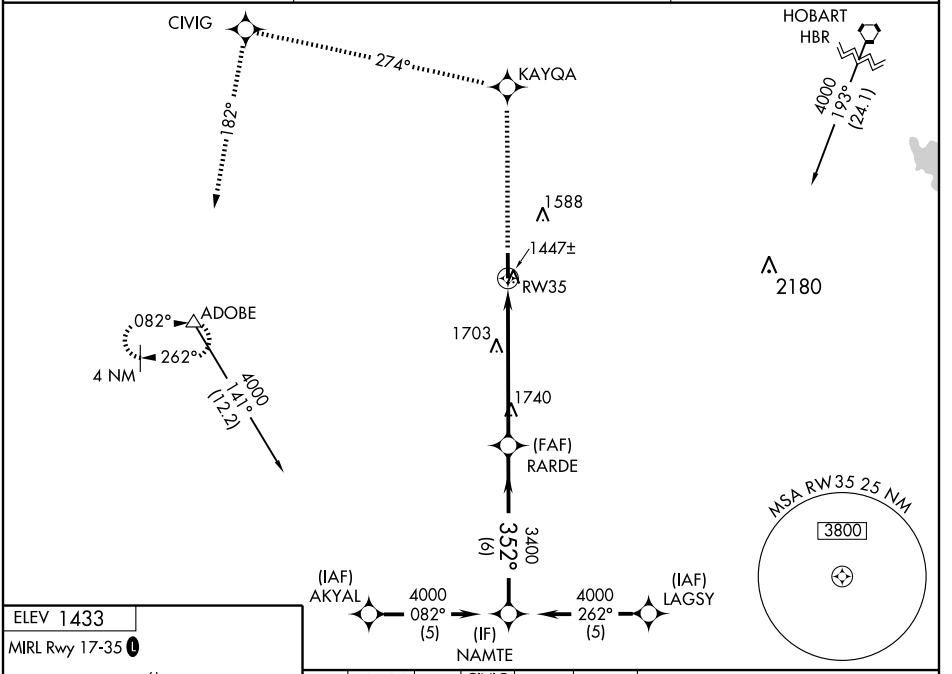

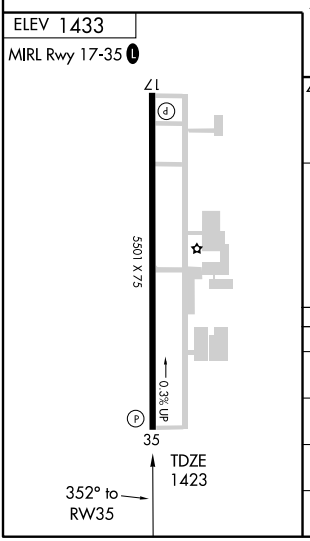

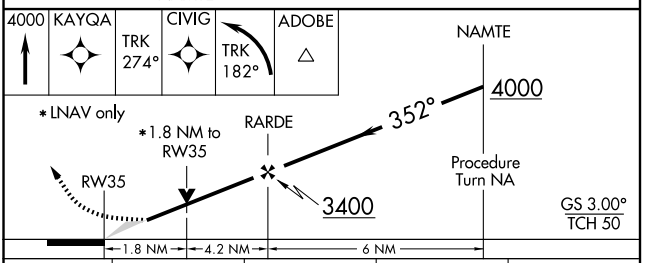

CATEGORY	A	B	C	D
LPV DA	1673-1	250 (300-1)		NA
LNAV/VNAV DA	1717-1	294 (300-1)		NA
LNAV MDA	2040-1	617 (700-1)	2040-1¾ 617 (700-1¾)	NA
CIRCLING	2040-1	607 (700-1)	2040-1¾ 607 (700-1¾)	NA

SC-1, 22 OCT 2009 to 19 NOV 2009
SC-1, 22 OCT 2009 to 19 NOV 2009