RNAV (GPS) RWY 18

MC PHERSON (MPR)

WAAS	APP CRS	Rwy Idg	5502
CH 99505	180°	TDZE	1497
W18A		Apt Elev	1498

▼ If local altimeter setting not received, use Salina Muni altimeter setting and increase all DAs 91 feet and all MDAs 100 feet. For uncompensated Baro-VNAV systems, ▲ LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Salina Muni altimeter setting. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 4100 direct ZOPMO and hold.

AWOS-3	WICHITA APP CON	UNICOM
119.025	125.5 306.2	122.8 (CTAF) L

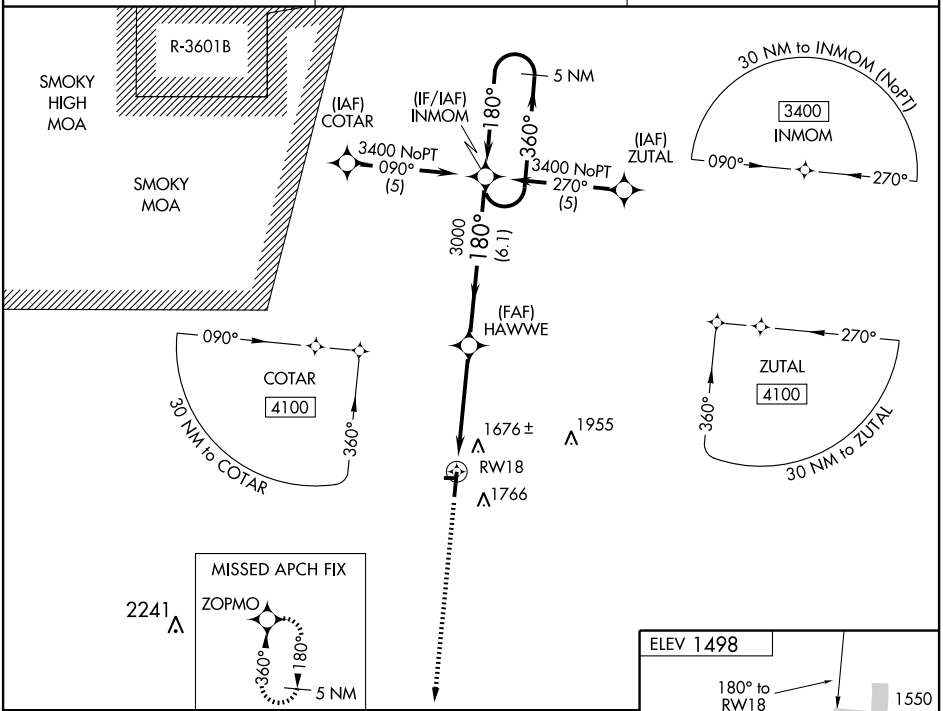

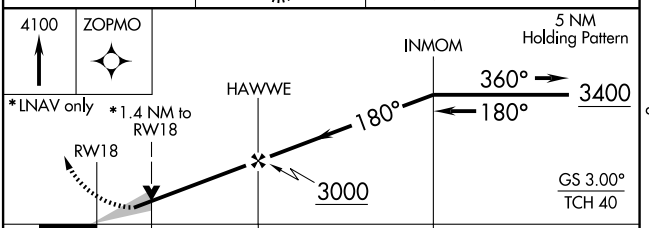

CATEGORY	A	B	C	D
LPV DA	1826-1¼ 329 (400-1¼)			NA
LNAV/VNAV DA	2029-2 532 (600-2)			NA
LNAV MDA	1980-1 483 (500-1)		1980-1¼ 483 (500-1¼)	NA
CIRCLING	2080-1 582 (600-1)		2080-1½ 582 (600-1½)	NA

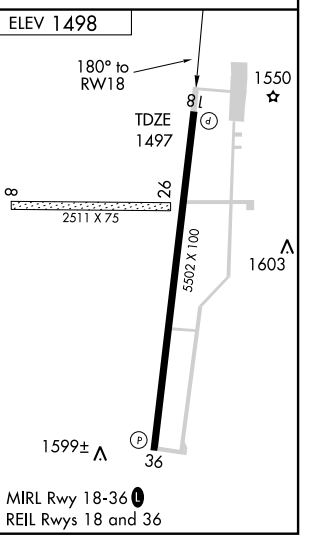

NC-2, 22 OCT 2009 to 19 NOV 2009

NC-2, 22 OCT 2009 to 19 NOV 2009