APP CRS		
090°	Rwy ldg	5646
	TDZE	590
	Apt Elev	590

RNAV (GPS) RWY 9

PORT CLINTON/CARL R. KELLER FIELD (PCW)

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Metcalf Field altimeter setting and increase all MDA 80 feet, increase LNAV visibility Cat C and D ¼ mile, and Circling visibility Cat C ¼ mile. VDP NA when using Metcalf Field altimeter setting.

NA

MISSED APPROACH: Climb to 2500 direct KUKAF and hold.

AWOS-3	CLEVELAND APP CON	UNICOM
118.775	126.35 354.025	122.8 (CTAF) L

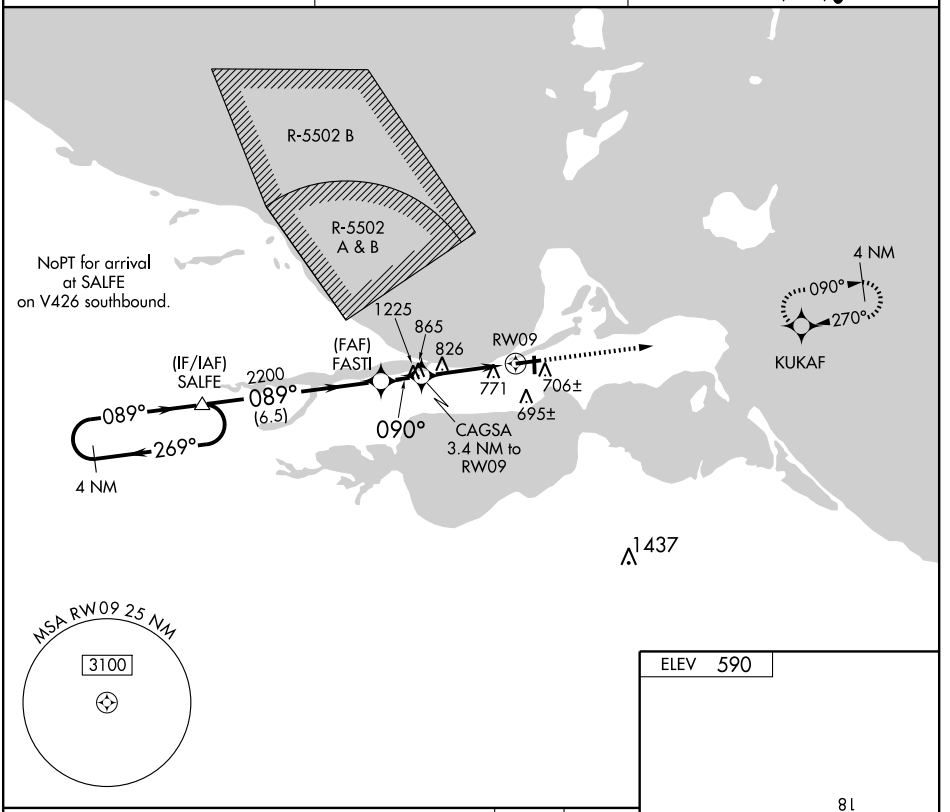

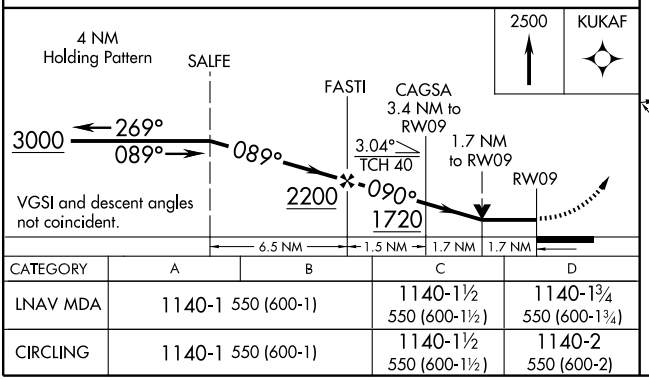

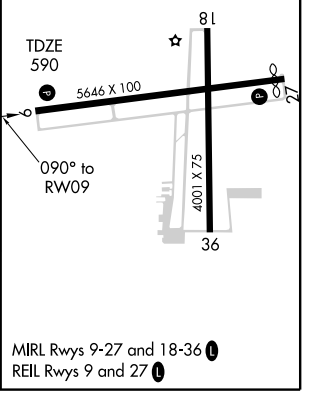

CATEGORY	A	B	C	D
LNAV MDA	1140-1 550 (600-1)		1140-1½ 550 (600-1½)	1140-1¾ 550 (600-1¾)
CIRCLING	1140-1 550 (600-1)		1140-1½ 550 (600-1½)	1140-2 550 (600-2)

MIRL Rwys 9-27 and 18-36 L
REIL Rwys 9 and 27 L

EC-2, 22 OCT 2009 to 19 NOV 2009
EC-2, 22 OCT 2009 to 19 NOV 2009