VOR/DME SCC	APP CRS	Rwy Idg	6500
113.9	232° M	TDZE	63
Chan 86	(043° G)	Apt Elev	65

VOR/DME RWY 23
DEADHORSE (SCC) (PASC)

For inoperative MALSR, increase S-23 Cat D visibility to RVR 6000 and Cat E visibility to 1½ mile. When using Nuiqsut altimeter setting, inoperative table does not apply. When local altimeter setting not received, use Nuiqsut altimeter setting and increase all MDAs 140 feet, and all visibilites 1 mile. VDP NA when using Nuiqsut altimeter setting.

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct SCC VOR/DME and hold.

ATIS	ANCHORAGE CENTER	DEADHORSE RADIO
118.4	134.4 370.9	123.6 (CTAF) L

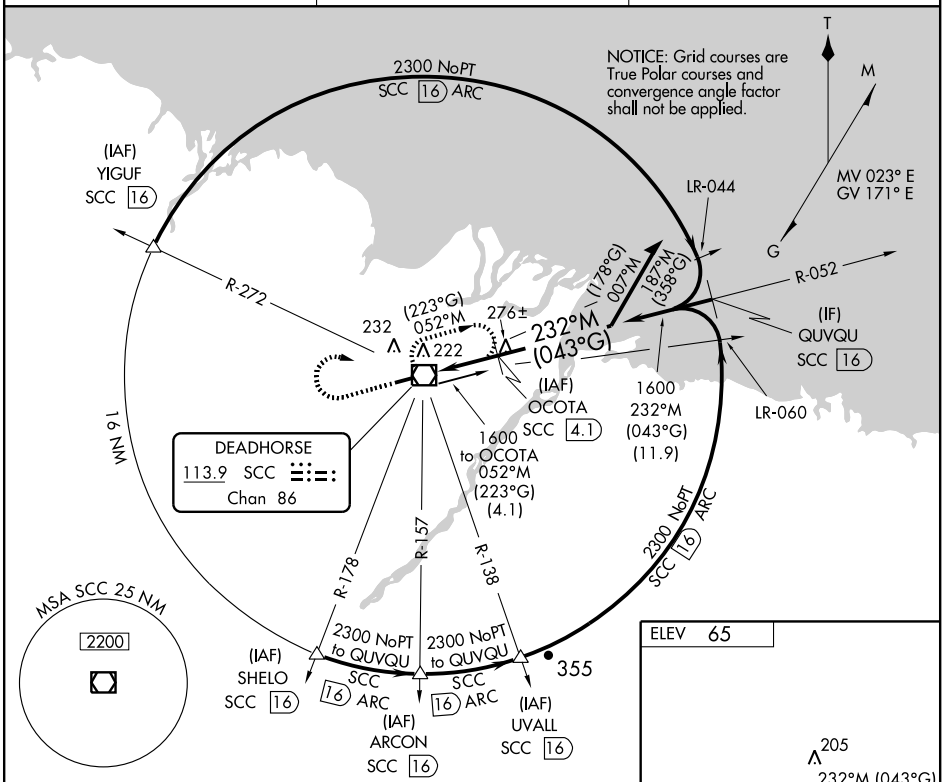

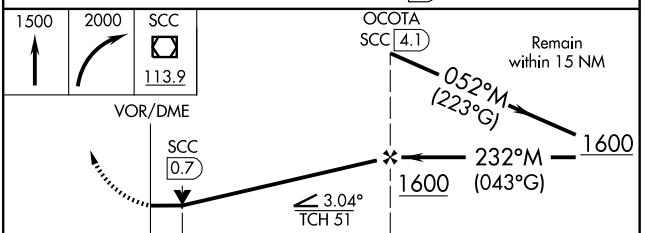

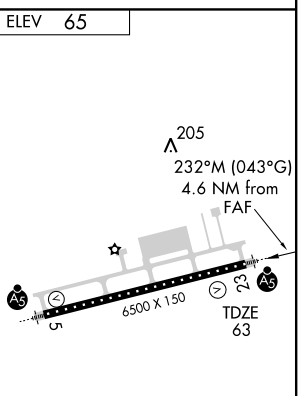

CATEGORY	A	B	C	D	E
S-23	480/24 417 (500-½)		480/40 417 (500-¾)	480/50 417 (500-1)	
CIRCLING	540-1 475 (500-1)		540-1½ 475 (500-1½)	620-2 555 (600-2)	

HIRL Rwy 5-23 L

AK, 22 OCT 2009 to 17 DEC 2009
AK, 22 OCT 2009 to 17 DEC 2009